



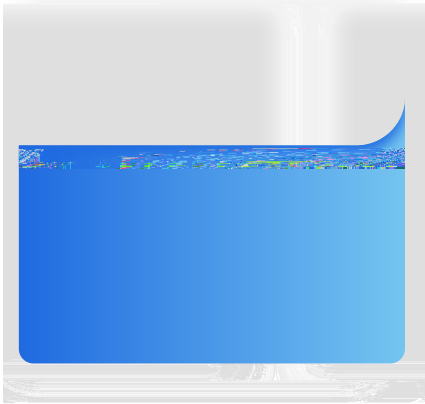



	100Vac		277Vac	
	90Vac		305Vac	
	47Hz		63Hz	
			3.5A	120Vac

(120Vac)			80A	
			120A	
(277Vac)			150A	
			0.5W	220Vac/50Hz DALI
	0.95	0.97		220Vac/50Hz
	0.90			100-277Vac/50Hz 70-100%
		8%	10%	220Vac/50Hz
			20%	100-277Vac/50Hz 70-100%


SS-320NH-E260D LED

	180V		260V	180V-214V
	214V		260V	$P_o = V_o \cdot I_o = 320W$
	1.23A		1.5A	1.5A 214V, 1.23A 260V
AOC	1.1A		1.5A	
			310V	
@120Vac	91.0%	93.0%		260V/1.23A
@220Vac	94.0%	96.0%		260V/1.23A
@277Vac	94.0%	96.0%		260V/1.23A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.7S	230Vac,
	-2%		+2%	
	-5%		+5%	
	-0.05%/		+0.05%/	0 90
	90	100	110	>Tc Typ. <Tc Min.

--	--	--

SS-320NH-E260D LED


	≥ 10MΩ	

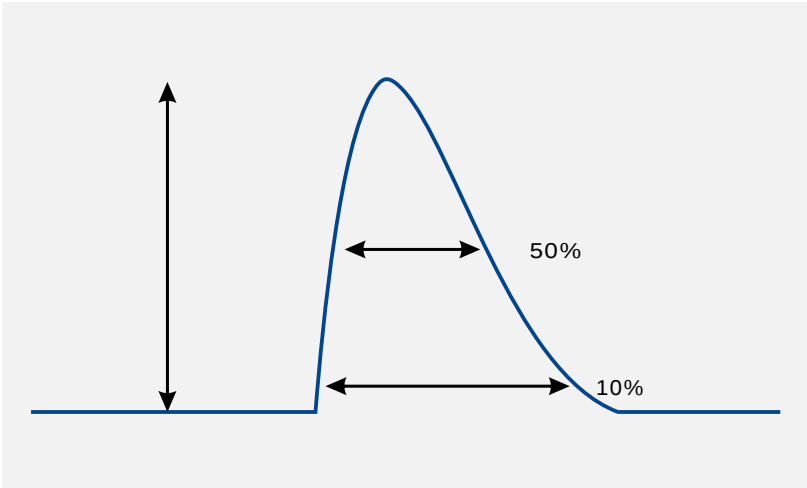

		T(@10%)	T(@50%)
120Vac	80A	896uS	
220Vac	120A		316uS
277Vac	150A	664uS	

SS-320NH-E260D LED

Vs. (/AOC)

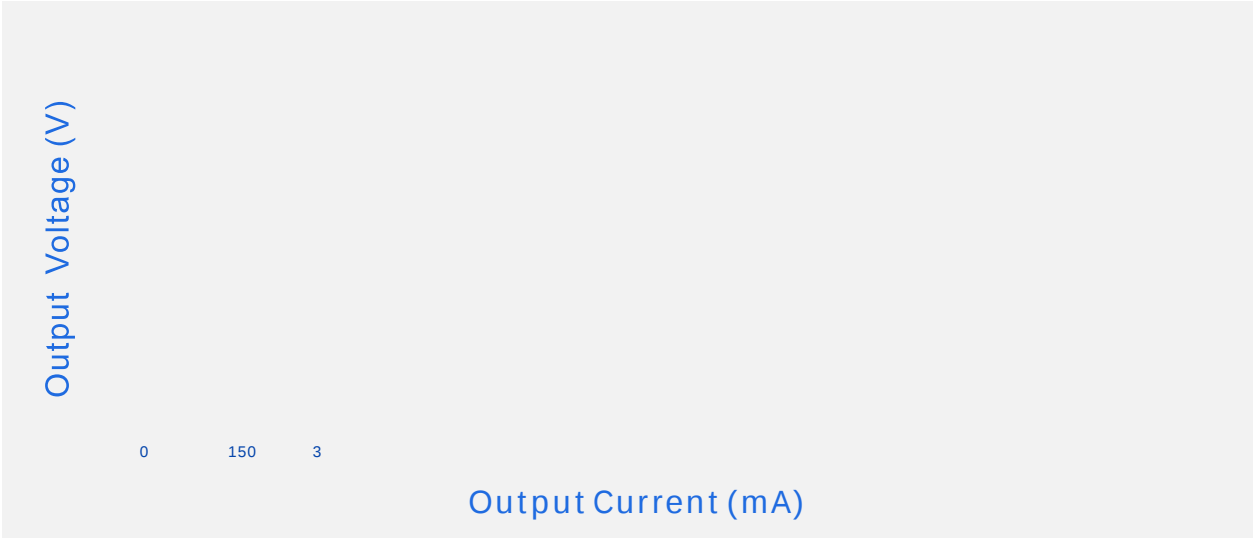


----- Dimming Window ————— AOC Window

Vs. (Vin=120Vac)


SS-320

260D LED



SS-320NH-E260D LED

Vs.

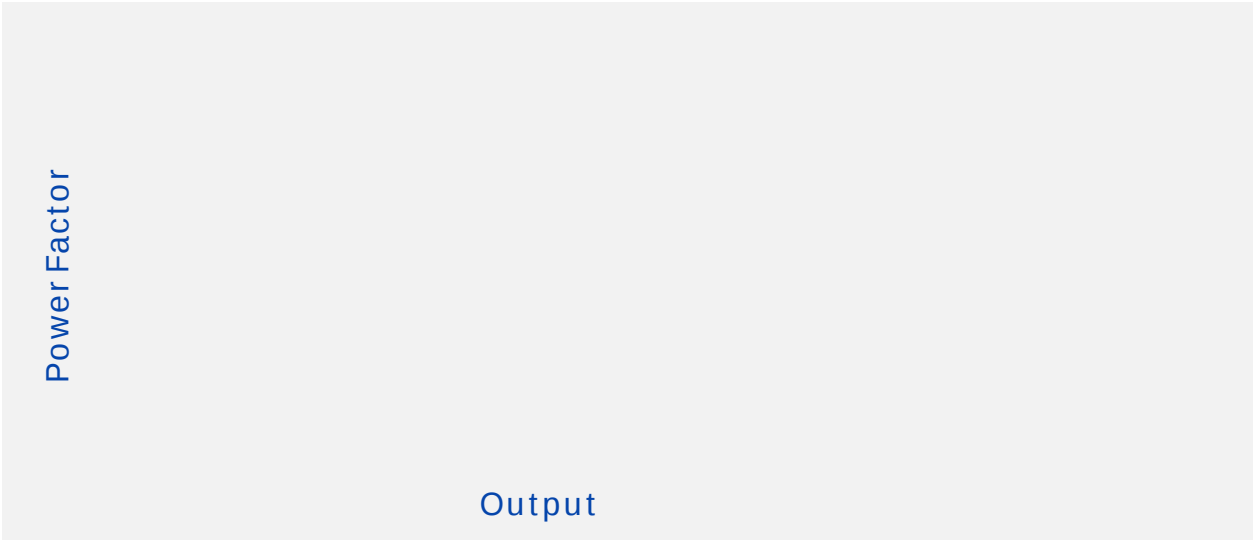

Vs.

SS-320NH-E260D LED

Vs.

Vs.

Vs.

Vs.

Vs.

