



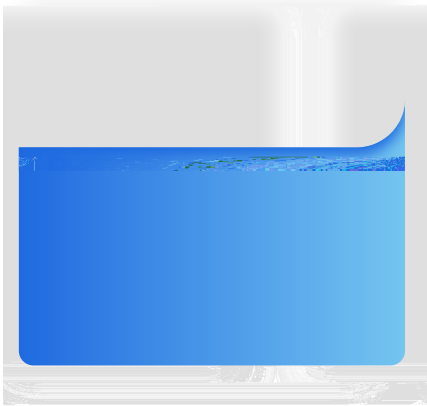

型号								
----	--	--	--	--	--	--	--	--

--	--	--	--	--



SS-100NS-260* LED

--	--	--	--	--

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--


UL/cUL	UL8750		
TUV	EN 61347-2-13:2014/A1:2017 EN 61347-1:2015 EN 62493:2015		
RCM	AS/NZS61347.2.13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

EMI/EMS	/	
---------	---	--

	FCC Part15: Subpart B; ANSI 63.4:2014	Class A
	FCC Part15: Subpart B; ANSI 63.4:2014	Class A
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5	B 6kV 6kV
	IEC/EN 61000-4-12	B 6kV 6kV

SS-100NS-260* LED

Vs. /AOC




----- Dimming Window ————— AOC Window

Vs. (Vin=200Vac)

SS-100NS-260* LED


Vs. (Vin=347Vac)

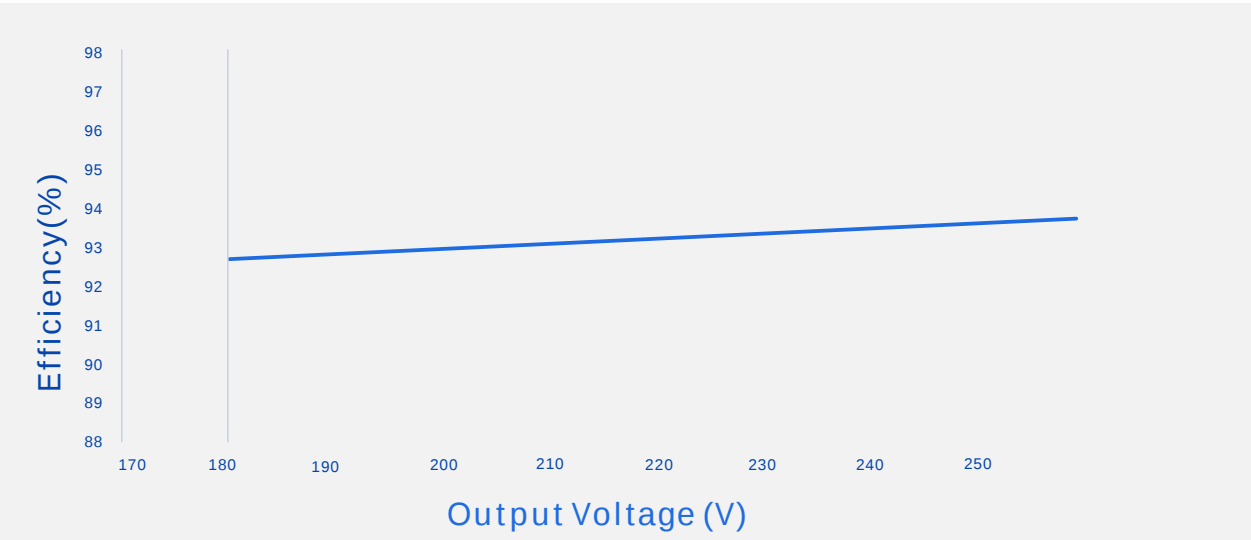

Vs. (Vin=480Vac)

SS-100NS-260* LED

Vs.

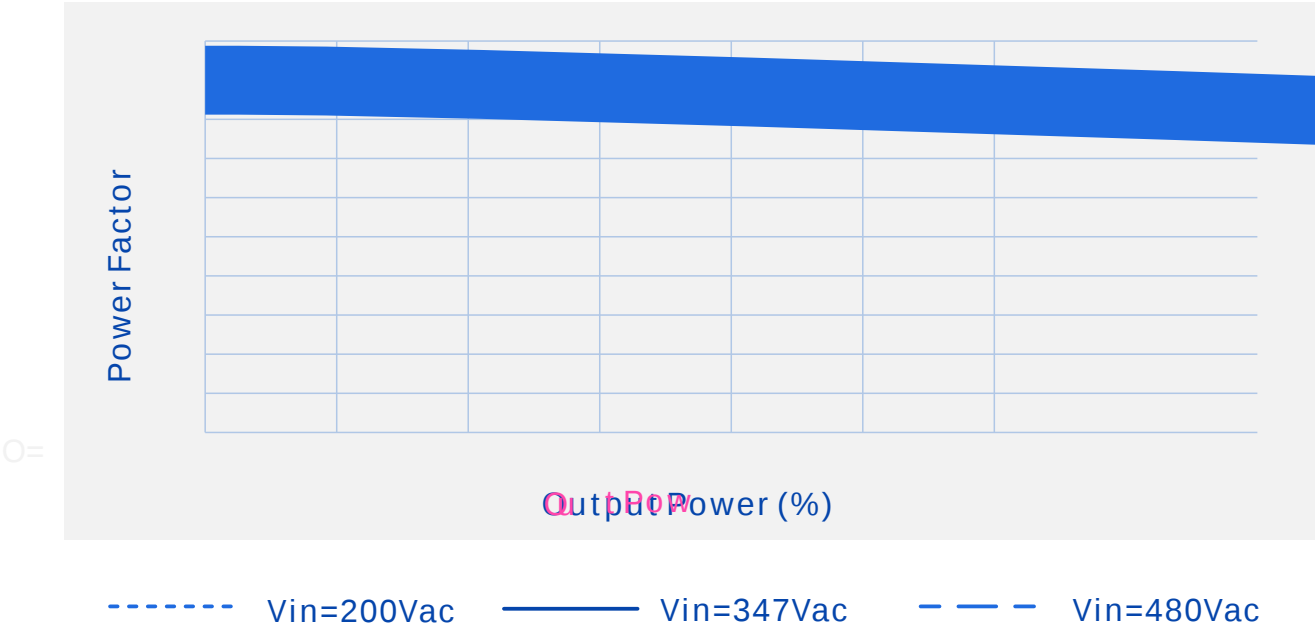

Vs.



Vs.

Vs.

Vs.

Vs.

SS-100N

LED



SS-100NS-260* LED



1
2 LED+ LED-
3
4 LED
5 LED
6 LED
7

LED

- mm × × =445 × 300 × 125;
- 24
- 0.53kg : 13.8kg
-

GB 3873 83
1

RoHS

RoHS (2011/65/EU) 2015/863/EU



