



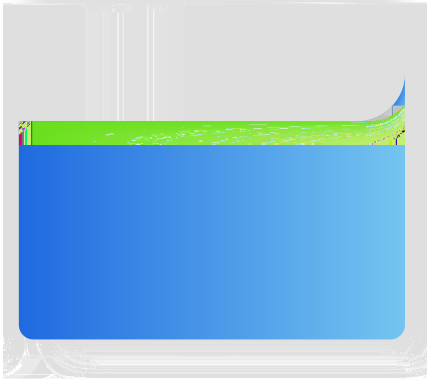




	120Vac		277Vac	
	108Vac		305Vac	

	47Hz		63Hz	
			1.8A	120Vac

(120Vac)				
(220Vac)				
(277Vac)				
			0.5W	220Vac/60Hz
	0.95	0.97		
	0.90			120-277Vac 70%-100%
		8%	12%	220Vac
			20%	120-277Vac 70%-100%




SS-150NH-V300BHB LED

		10.8V	12V	13.2V	
				200mA	
0-10V		0V		12V	DIM+ 110uA
		10%Iomax		100%Ioset	DIM+/DIM-
		0V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 110uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	DIM+ 110uA
		10%Iomax		100%Ioset	
		0.7V	0.8V	0.9V	12V
		0.9V	1.0V	1.1V	
		0.2A		0.75A	ğ x é

	≤ 85	≥ 50,000 hours	80%
MTBF		200,150 hours	220Vac, , 25 (MIL-HDBK-217F)
		90	
		5	85
		500g	
		160mm*55mm*32mm	x x

25 LED







Vs.

Vs.

Vs.





SS-1502 300BHB LED



200



86-755-29358800

8

