




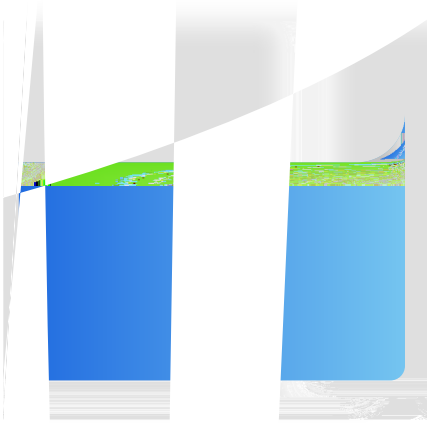



				120Vac

				220Vac/50Hz
				220Vac/50Hz
				100-277Vac/50Hz 70-100%
				220Vac/50Hz
				100-277Vac/50Hz 70-100%




Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--


	UL	
	1600Vac	
	1600Vac	
	500Vac	
	≥ 10MΩ	500Vdc
	≤ 0.1Ω	25A/1min
	≤ 0.75mA	277Vac

1. EMC
2. L/N /
- EMC /

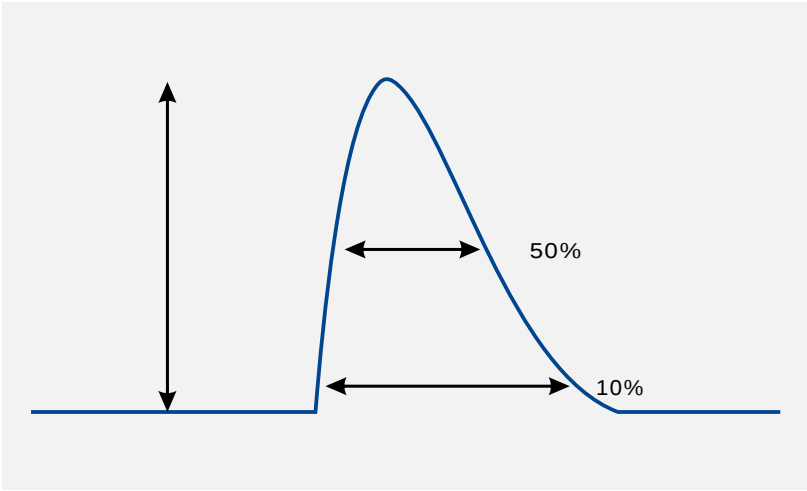

		T(@10%)	T(@50%)
120Vac	60A	520uS	
220Vac	100A		220uS
277Vac	130A	480uS	

Vs. (/AOC)



nn


Vs. (Vin=120Vac)

SS-160NH-E(ISO)

LED


Vs. (Vin=220Vac)

Vs. (Vin=277Vac)

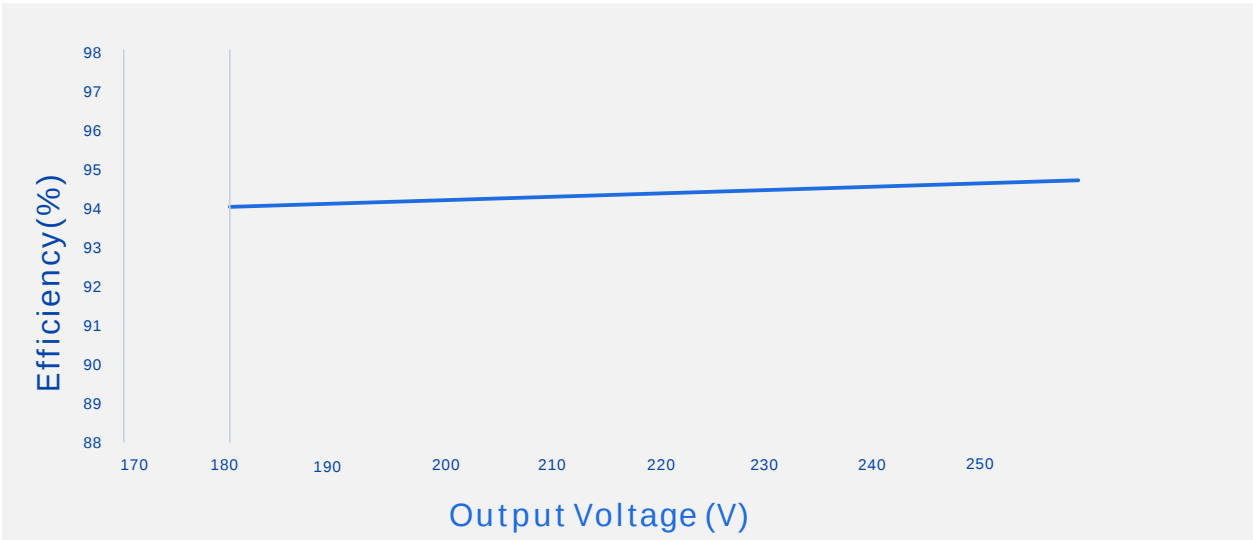


Vs.

Vs.



Vs.

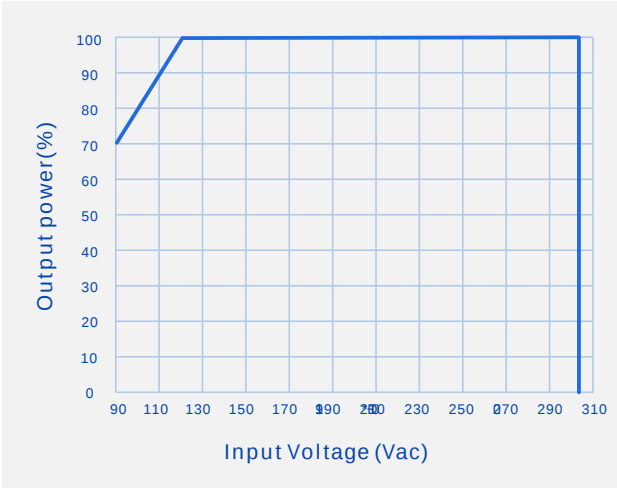

9

Vs.

Vs.

Vs.





V00		2025/11/29	