


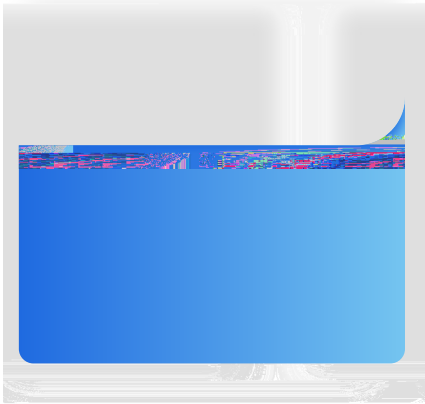

	220Vac		240Vac	
AC	80Vac		264Vac	AC
DC	168Vdc		280Vdc	
	47Hz	50/60Hz	63Hz	
			1.0A	200Vac
(230Vac)			17A	
				230Vac
			0.5W	230Vac/50Hz DALI-2
	0.96	0.98		230Vac/50Hz
	0.9			220-240Vac/50Hz 30-100%
		6%	10%	230Vac/50Hz
			20%	220-240Vac/50Hz 30-100%

W (SS-165PA-236F)

	79V		236V	79-157V
	157V		236V	Po=Vo*Io=165W
	0.7A		1.05A	1.05A 157V,0.7A 236V
AOC	0.2A		1.05A	NFC
			250V	
@230Vac	92.0%	94.0%		236V/0.7A
	-5%		+5%	α10
náOR% PK-AV			10%	

%			


MTBF	250,000 hours	
	IP20	
	90	
	8	
	790g	
	171 * ØD	

Tcase	-40	25	+90	0
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	


ENEC	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017 EN IEC 62384:2020	✓	
UKCA	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN 62493:2015/A1:2022	✓	
EAC	EN 61347-2-13:2014+A1:2017 EN 61347-1:2015+A1:2021	✓	
CE	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017 EN 62493:2015/A1:2022	✓	

EMI/EMS	/	
	EN IEC 55015:2019/A11:2020	Class B
	EN IEC 55015:2019/A11:2020	Class B
	EN IEC 61000-3-2:2019/A1:2021	Class C
	IEC/EN61000-4-5	B 8kV 6kV
	EN61547:2009	B 10kV 6kV

lỗ




Vs.

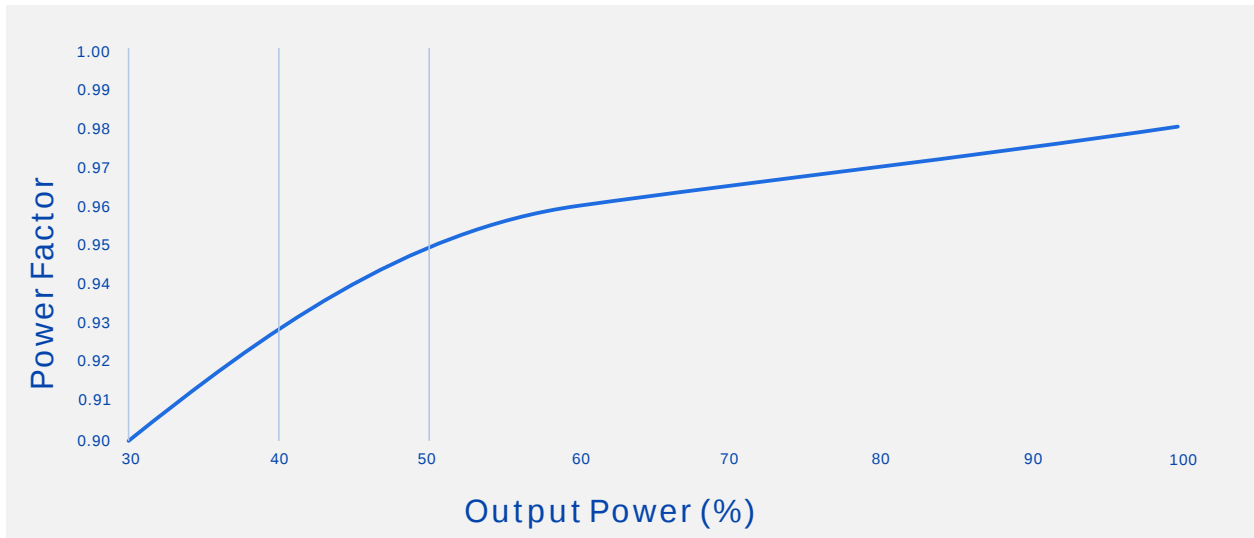



— Vin=230Vac

Vs.

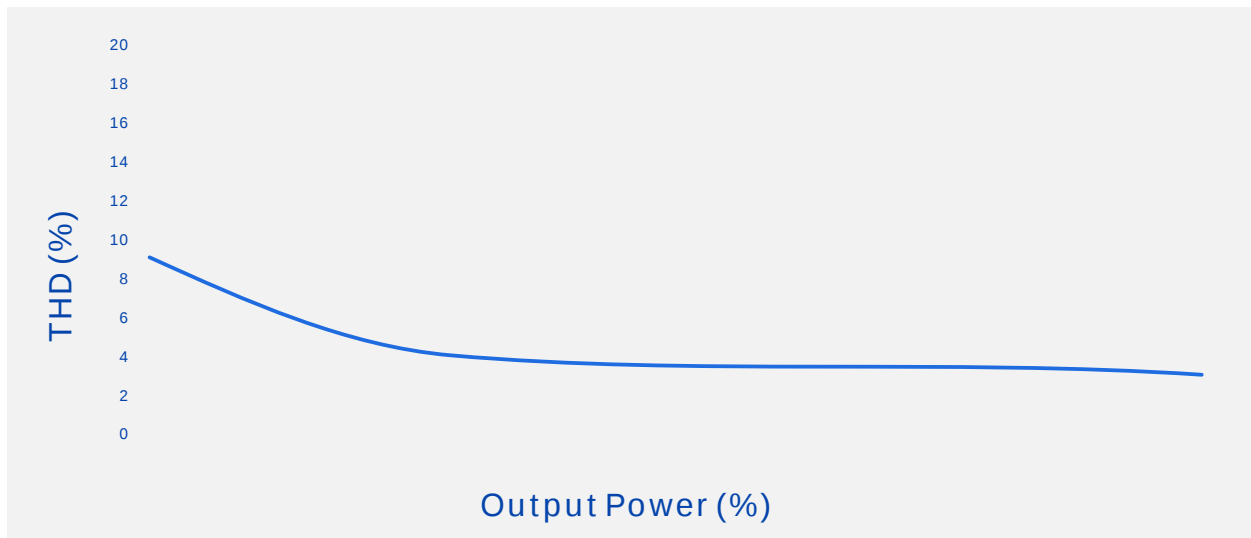

— Vin=230Vac

Vs.

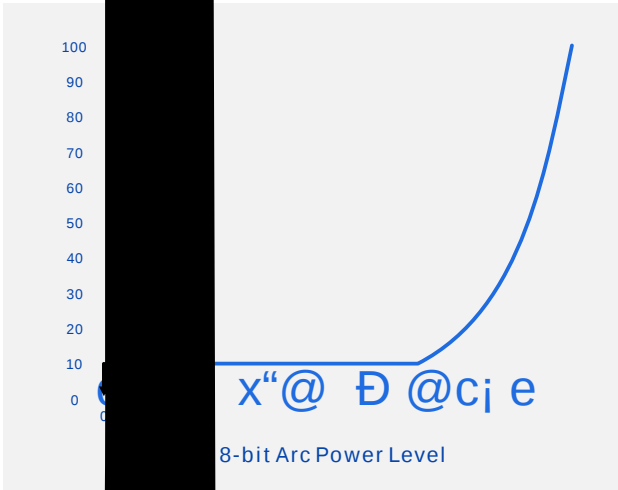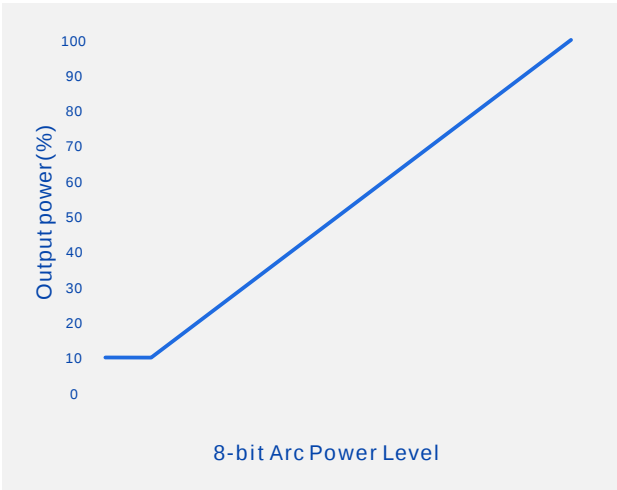

NTC

--	--	--	--	--

(NTC)	T1 ()		60		
	T2 ()				




165W NFC

DALI-2 & D4i

165W NFC

DALI-2 & D4i



V00		2024/01/12	

