






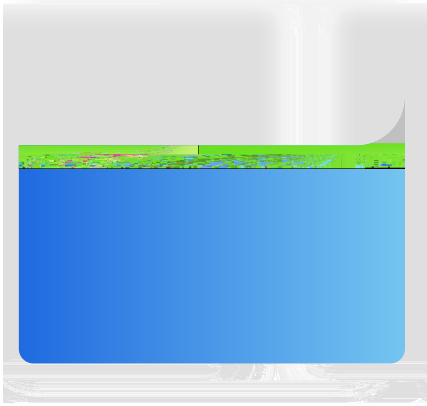




|  |        |  |        |        |
|--|--------|--|--------|--------|
|  | 100Vac |  | 277Vac |        |
|  | 90Vac  |  | 305Vac |        |
|  | 47Hz   |  | 63Hz   |        |
|  |        |  | 1.96A  | 120Vac |

|          |      |      |      |                         |
|----------|------|------|------|-------------------------|
| (120Vac) |      |      | 60A  |                         |
| (220Vac) |      |      | 100A |                         |
| (277Vac) |      |      | 130A |                         |
|          |      |      | 0.5W | 220Vac/50Hz             |
|          | 0.95 | 0.97 |      | 220Vac/50Hz             |
|          | 0.90 |      |      | 100-277Vac/50Hz 70-100% |
|          |      | 8%   | 10%  | 220Vac/50Hz             |
|          |      |      | 20%  | 100-277Vac/50Hz 70-100% |





0h

|  |     |                     |  |                      |  |
|--|-----|---------------------|--|----------------------|--|
|  |     |                     |  |                      |  |
|  |     |                     |  |                      |  |
|  |     |                     |  |                      |  |
|  | PWM | 9.8V                |  | 10.2V                |  |
|  | PWM | 0V                  |  | 0.3V                 |  |
|  | PWM | 1KHz                |  | 2KHz                 |  |
|  | PWM | 0%                  |  | 100%                 |  |
|  |     | 0Kohm               |  | 100Kohm              |  |
|  |     | 10%I <sub>max</sub> |  | 100%I <sub>set</sub> |  |

|      |                 |                |                            |
|------|-----------------|----------------|----------------------------|
|      | ≤ 85            | ≥ 50,000 hours |                            |
| MTBF | 600,000 hours   |                | 220Vac, 25 (MIL-HDBK-217F) |
|      | 90              |                |                            |
|      | 5               |                |                            |
|      | 570g            |                |                            |
|      | 220mm*45mm*31mm |                | x x                        |




|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |



|     |  |  |
|-----|--|--|
| T(@ |  |  |
|     |  |  |
|     |  |  |


Vs. ( /AOC )




----- Dimming Window      AOC Window

Vs. (Vin=120Vac)






Vs.

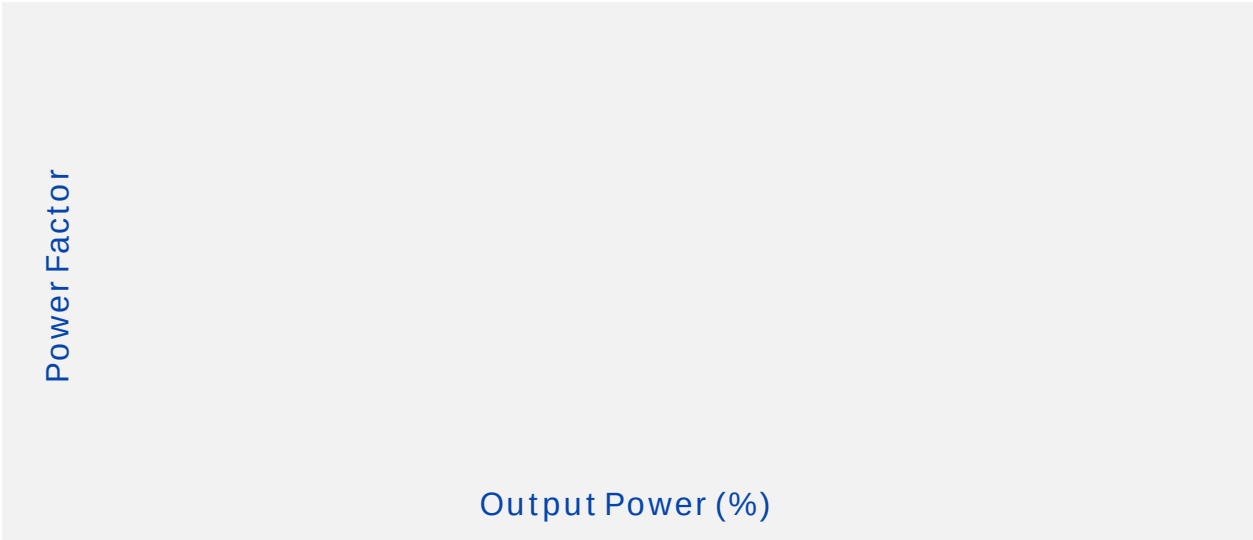


Vs.


Vs.

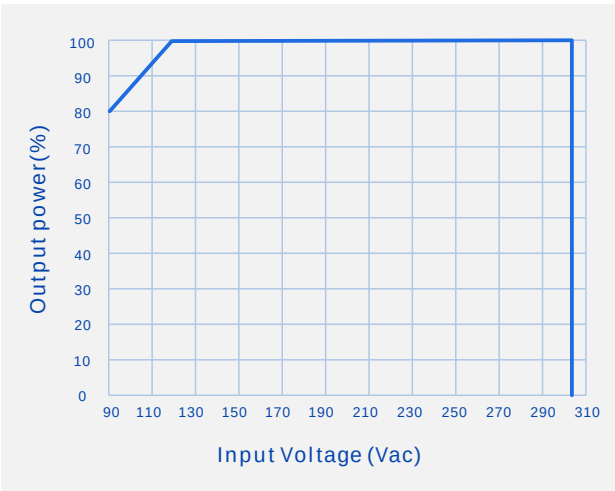


Vs.

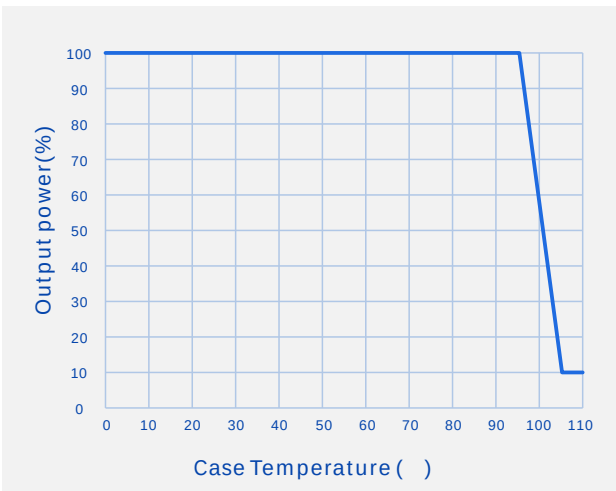

Vs.

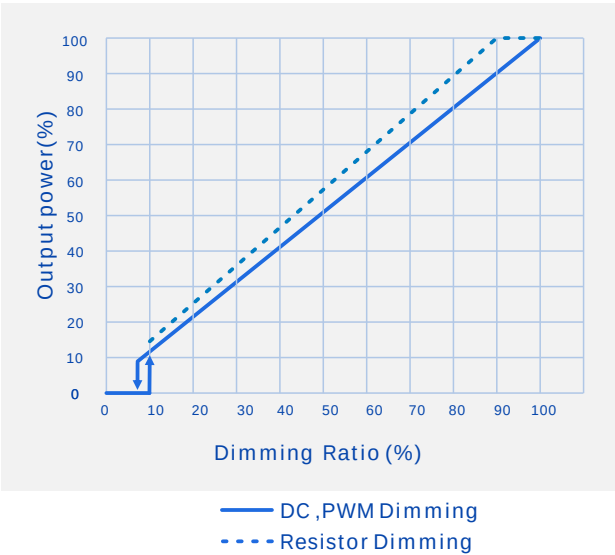

Vs.

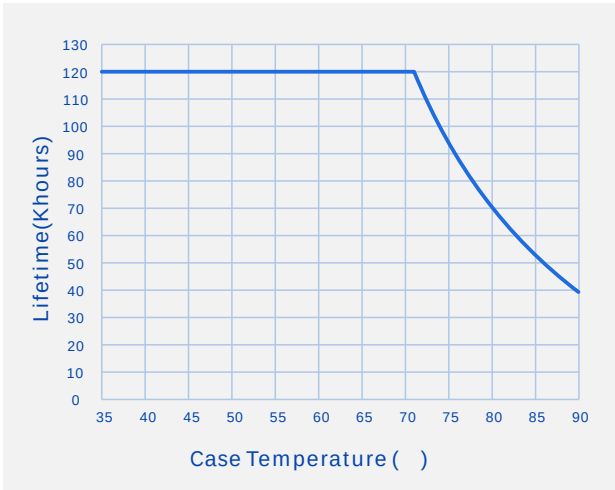

SS-200NH-E(ISO)

LED

|    |    | mm(In.)   |
|----|----|-----------|
|    | L3 | 205(8.07) |
|    | W2 | 45(1.77)  |
|    | H  | 31(1.22)  |
|    | L1 | 220(8.66) |
|    | L2 | 213(8.39) |
|    | W1 | 32(1.26)  |
| Tc | X  | 32(1.26)  |
| Tc | Y  | 24(0.94)  |

1

2

AC

DC

10±2mm;

LED

DIM


/

/

:

:





|     |  |            |  |
|-----|--|------------|--|
| V00 |  | 2026/01/09 |  |
|     |  |            |  |
|     |  |            |  |
|     |  |            |  |
|     |  |            |  |
|     |  |            |  |
|     |  |            |  |
|     |  |            |  |
|     |  |            |  |
|     |  |            |  |
|     |  |            |  |