


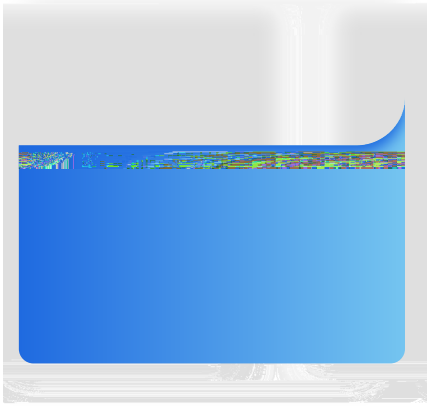

SS-240NH-E

LED

“ * ”

“ * ”	AUX 12V (:H)	0-10V/PWM/Resistor	()		
BH	✓	✓			
BHB	✓	✓	✓		
BHP	✓	✓		✓	
BHBP	✓	✓	✓	✓	

if

--	--	--	--	--

	100Vac		277Vac	
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			2.2A	120Vac
			265W	120Vac
(120Vac)			60A	
(220Vac)			100A	
(277Vac)			130A	
			0.5W	220Vac/50Hz
	0.95	0.97		220Vac/50Hz
	0.90			100-277Vac/50Hz 70-100%
		8%	10%	220Vac/50Hz
			20%	100-277Vac/50Hz 70-100%

SS-240NH-E

LED


--	--	--	--	--

	180V		260V	
	200V		260V	Po=Vo*Io=240W
	0.92A		1.2A	1.2A 200V,0.92A 260V
AOC	0.84A		1.2A	
			310V	

--



Tcase				

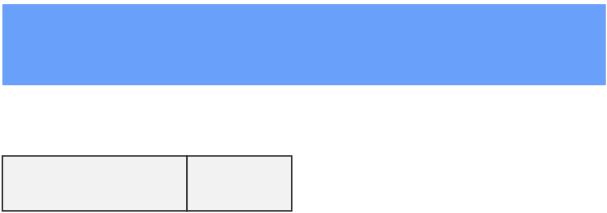

240NH-E LED

Vs. (/AOC)

Output



Dimming Window


AOC Window

(Vin=120Vac)

SS-240NH-E

LED

Vs. (Vin=220Vac)

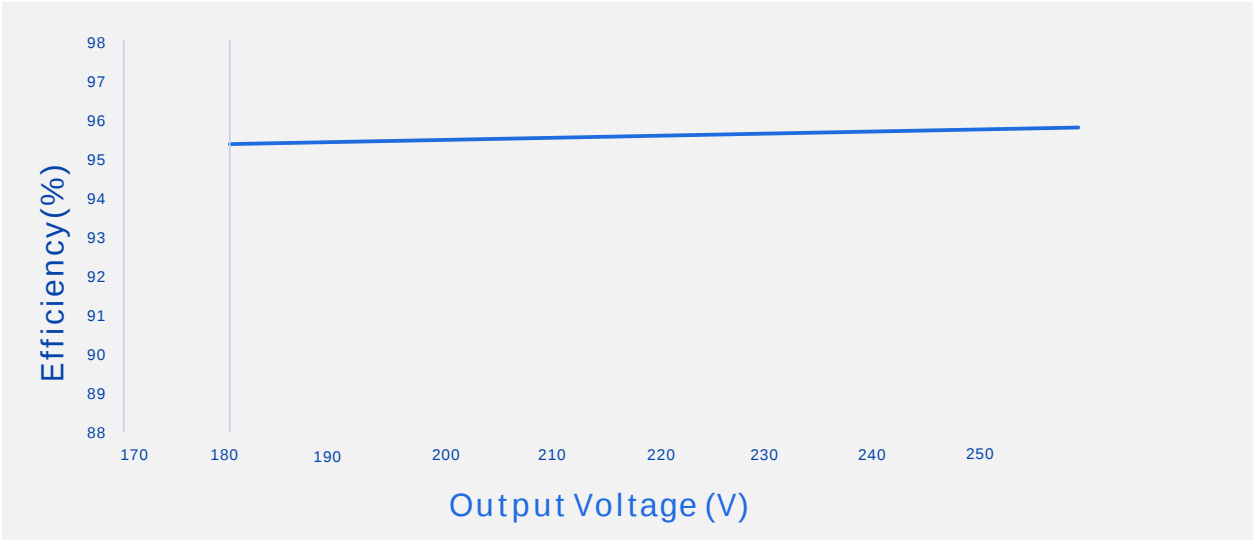

Vs. (Vin=277Vac)

Vs.

Vs.

Vs.

Vs.

SS-240NH-E

LED

		mm(In.)
	L3	205(8.07)
	W2	45(1.77)
	H	34(1.34)
	L1	220(8.66)
	L2	213(8.39)
	W1	32(1.26)
Tc	X	32(1.26)
Tc	Y	24(0.94)

1

2

AC

DC

10±2mm;

LED

DIM

/

/

:

;





V00		2022/06/20	
V01	SPD	2022/10/26	
V02	TC	2022/12/02	
V03		2023/05/15	
V04		2023/09/12	
V05		2026/01/08	