




SS-320NH-V300BHB LED

	180V		300V	
	214V		300V	Po=Vo*Io=320W
	1.06A		1.5A	1.5A 214V,1.06A 300V
AOC	0.4A		1.5A	
			350V	
				300V/1.06A
				300V/1.06A
				300V/1.06A
PK-AV				
W *				

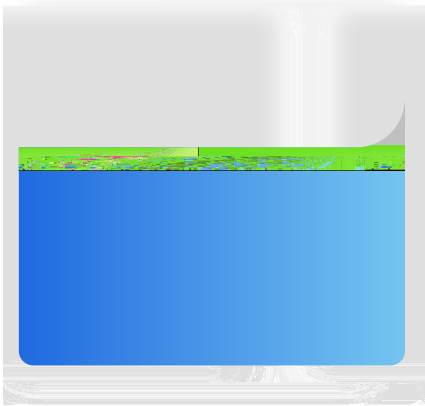

SS-320NH-V30

--	--	--	--


SN: 1000418201502280000	Case	+90	
		+90	
		90%RH	
		95%RH	
		4000m	

--	--	--	--	--


UL/cUL	UL		
TUV	EN 61347-1:2008 EN 61347-2-13:2014		
RoHS			
	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		



SS-320NH-V300BHB LED

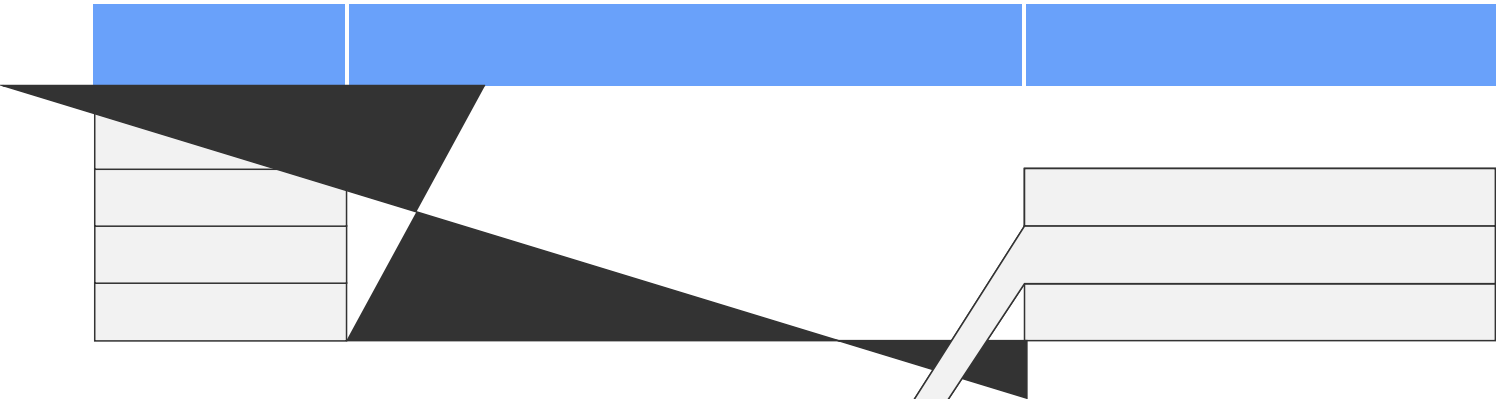


- 1. EMC
- 2. L/N / EMC

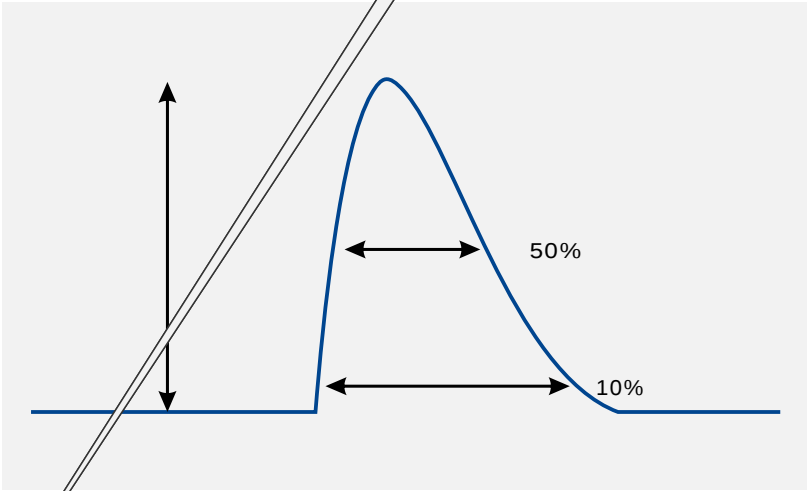

		T(@10%)	T(@50%)
120Vac	60A	590uS	300uS
220Vac	100A	590uS	300uS
277Vac	150A	590uS	300uS

SS-320NH-V300BHB LED

Vs. (Vin=220Vac)

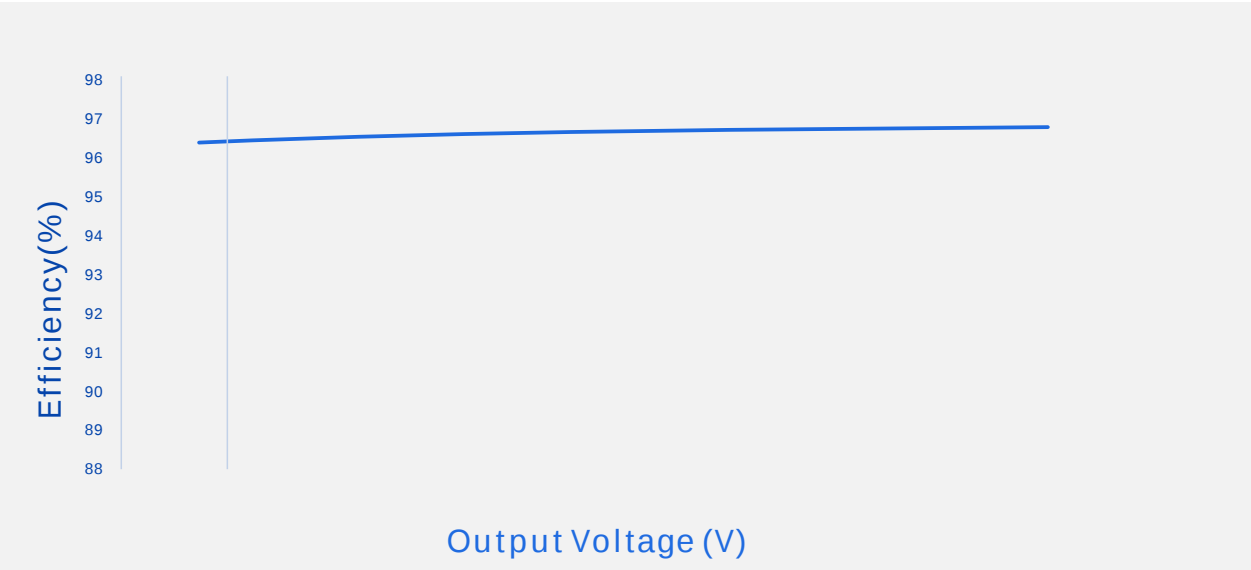


Vs.

Vs.

Vs.

1 LED ;

SS-320NH-V300BHB LED



V00		2024/09/08	