







SS-320N

LED

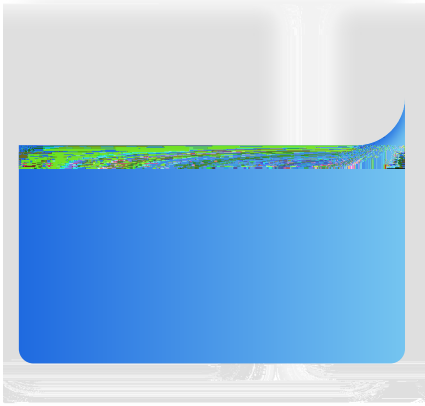



|  |  |  |  |        |
|--|--|--|--|--------|
|  |  |  |  |        |
|  |  |  |  |        |
|  |  |  |  |        |
|  |  |  |  | 120Vac |

|  |  |  |  |      |
|--|--|--|--|------|
|  |  |  |  | 冷机启动 |
|  |  |  |  |      |
|  |  |  |  |      |





|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|--|--|--|--|--|

|       |       |    |       |  |
|-------|-------|----|-------|--|
| Tcase | -40   | 25 | +90   |  |
|       | -40   | 25 | +90   |  |
|       | 10%RH |    | 90%RH |  |
|       | 5%RH  |    | 95%RH |  |
|       | -65m  |    | 4000m |  |


|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

|        |                                                      |  |  |
|--------|------------------------------------------------------|--|--|
| UL/cUL | UL8750                                               |  |  |
| TUV    |                                                      |  |  |
| RCM    | AS/NZS61347.2.13                                     |  |  |
| BIS    | IS15885:2012 Part 2 Sec 13                           |  |  |
| CCC    | GB 19510.14-2009                                     |  |  |
| CE     | EN 61347-2-13:2014<br>EN61347-1:2008+A1:2011+A2:2013 |  |  |

|  |  |  |
|--|--|--|
|  |  |  |
|--|--|--|

|  |          |     |          |
|--|----------|-----|----------|
|  | UL       | TUV |          |
|  | 1700Vac  | /   |          |
|  | 1700Vac  | /   |          |
|  | 1700Vac  | /   |          |
|  | 500Vac   | /   |          |
|  | ≥ 10MΩ   |     | 500Vdc   |
|  | ≤ 0.1Ω   |     | 25A/1min |
|  | ≤ 0.75mA |     | 347Vac   |


1. EMC
2. L/N /
- EMC /

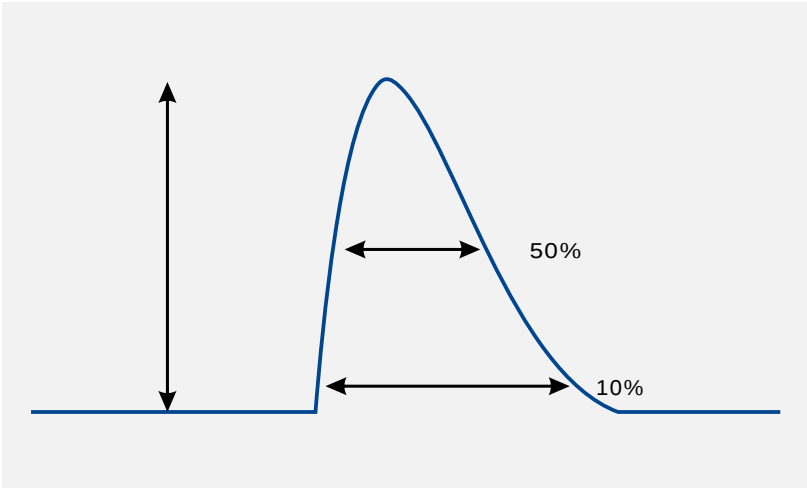

|        |      | T(@10% ) | T(@50% ) |
|--------|------|----------|----------|
| 120Vac | 80A  | 970uS    |          |
| 220Vac | 120A |          | 320uS    |
| 347Vac | 150A | 730uS    |          |




Vs. (Vin=220Vac)

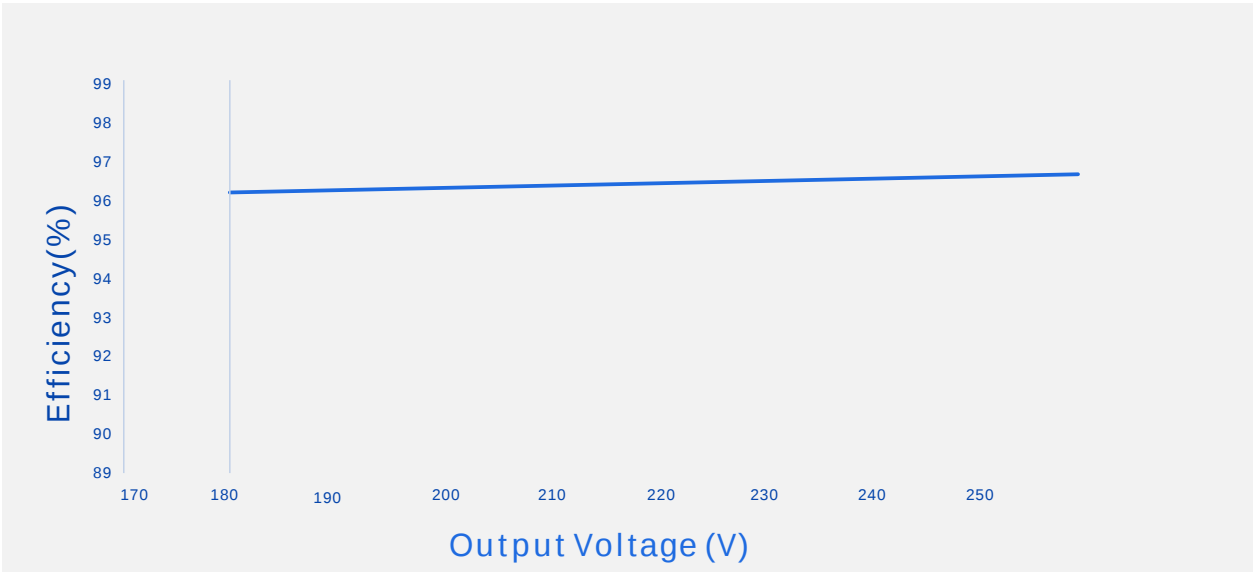


Vs. (Vin=347Vac)

Vs. (Vin=120Vac)

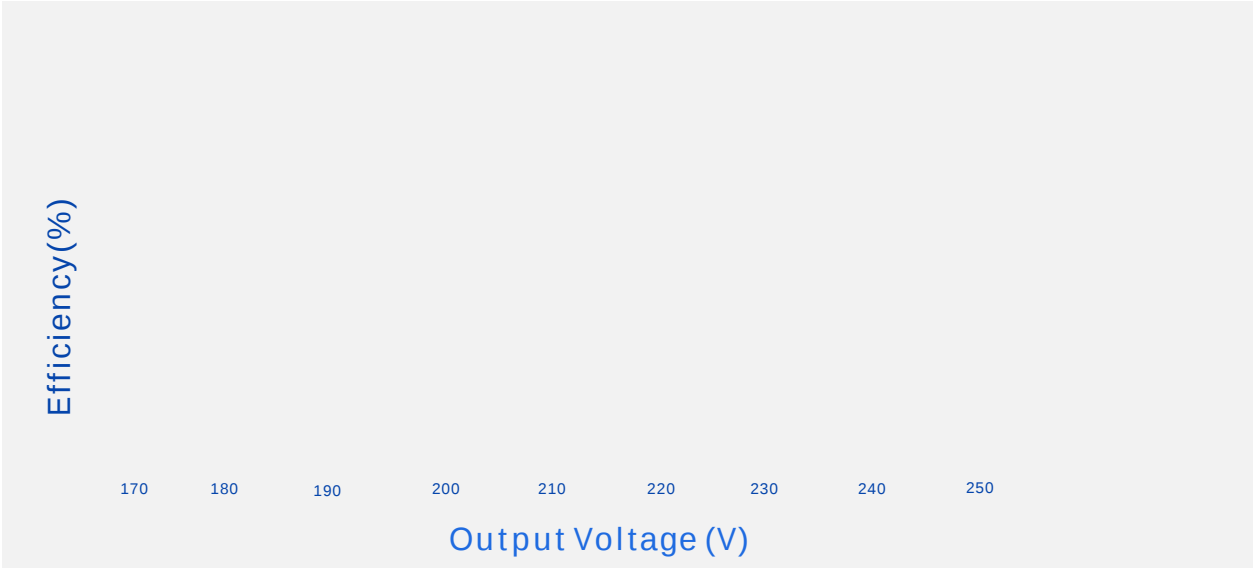

Vs. (Vin=220Vac)

Vs. (Vin=347Vac)

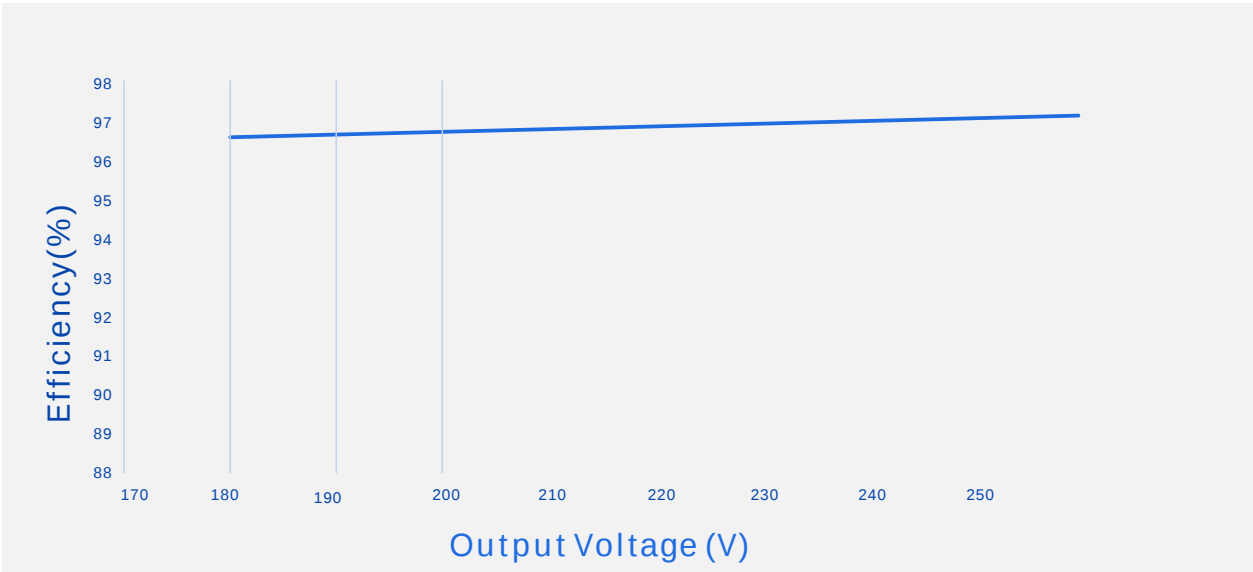



Vs.

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |

Vs.

Vs.

Vs.

SS-320NM-A

LED

(B )

|    |    | mm(In.)     |
|----|----|-------------|
|    | L3 | 202(7.95)   |
|    | W2 | 52.5(2.07)  |
|    | H  | 34(1.34)    |
|    | L1 | 220(8.66)   |
|    | L2 | 210.5(8.29) |
|    | W1 | 32(1.26)    |
| Tc | X  | 130(5.12)   |
| Tc | Y  | 17(0.67)    |

1

2

AC

DC

10±2mm;

LED

DIM

/

/

:

;

(BH )

|  |    |             |
|--|----|-------------|
|  | L3 | 212(8.35)   |
|  | W2 | 52.5(2.07)  |
|  | H  | 34(1.34)    |
|  | L1 | 230(9.06)   |
|  | L2 | 220.5(8.68) |
|  | W1 | 32(1.26)    |



|    |         |      |               |
|----|---------|------|---------------|
| 1  | ,       | ,    | 704           |
| 2  |         |      |               |
| 3  | “       | ”    | “ 50 ” 500cm² |
|    | 150cm³; | LED  |               |
| 4  |         |      |               |
| 5  | LED+    | LED- |               |
| 6  |         |      |               |
| 7  | LED     |      |               |
| 8  | LED     |      |               |
| 9  |         | LED  |               |
| 10 |         |      |               |

|      |        |     |                   |
|------|--------|-----|-------------------|
| -    | mm     | × × | =445 × 300 × 153; |
| -    | 24     |     |                   |
| - B  | 0.67kg |     | 16.92kg           |
| - BH | 0.68kg |     | 17.16kg           |
| -    |        |     |                   |

|  |
|--|
|  |
|--|

|            |
|------------|
| GB 3873 83 |
| 1          |

RoHS

|      |              |             |
|------|--------------|-------------|
| RoHS | (2011/65/EU) | 2015/863/EU |
|------|--------------|-------------|

