


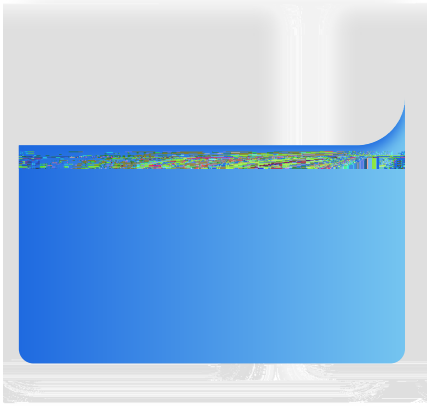

	220Vac		240Vac	
AC	80Vac		264Vac	AC
DC	171Vdc		275Vdc	
	47Hz	50/60Hz	63Hz	
			0.5A	200Vac
(230Vac)			17A	
				220Vac
			0.5W	230Vac/50Hz DALI-2
	0.96	0.105		230Vac/50Hz
	0.90			220-240Vac/50Hz 40-100%
		8%	10%	230Vac/50Hz
			20%	220-240Vac/50Hz 30-100%



--	--	--

(SS-75PA-178F)

	56V		178V	56-107V
	107V		178V	Po=Vo*Io=75W
	0.42A		0.7A	0.7A 107V,0.42A 178V
AOC	0.2A		0.7A	
			200V	
@230Vac	91.0%	93.0%		178V/0.421A
	-3%		+3%	
PK-AV		5%	10%	
(P _{st} LM)			1	
(SVM)			0.4	
			10%	
			0.7S	230Vac ,
	-2%		+2%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	



75W NFC

DALI-2 & D4i

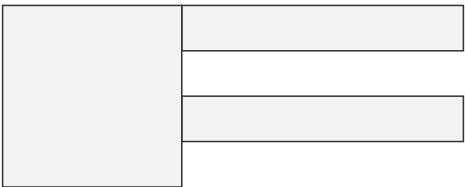

[illegible]

E
IEC/EN61444- -
EN6 54 :201

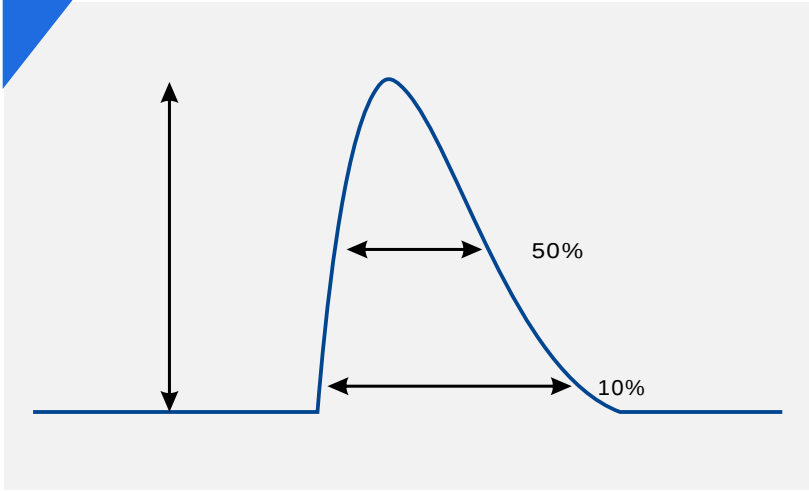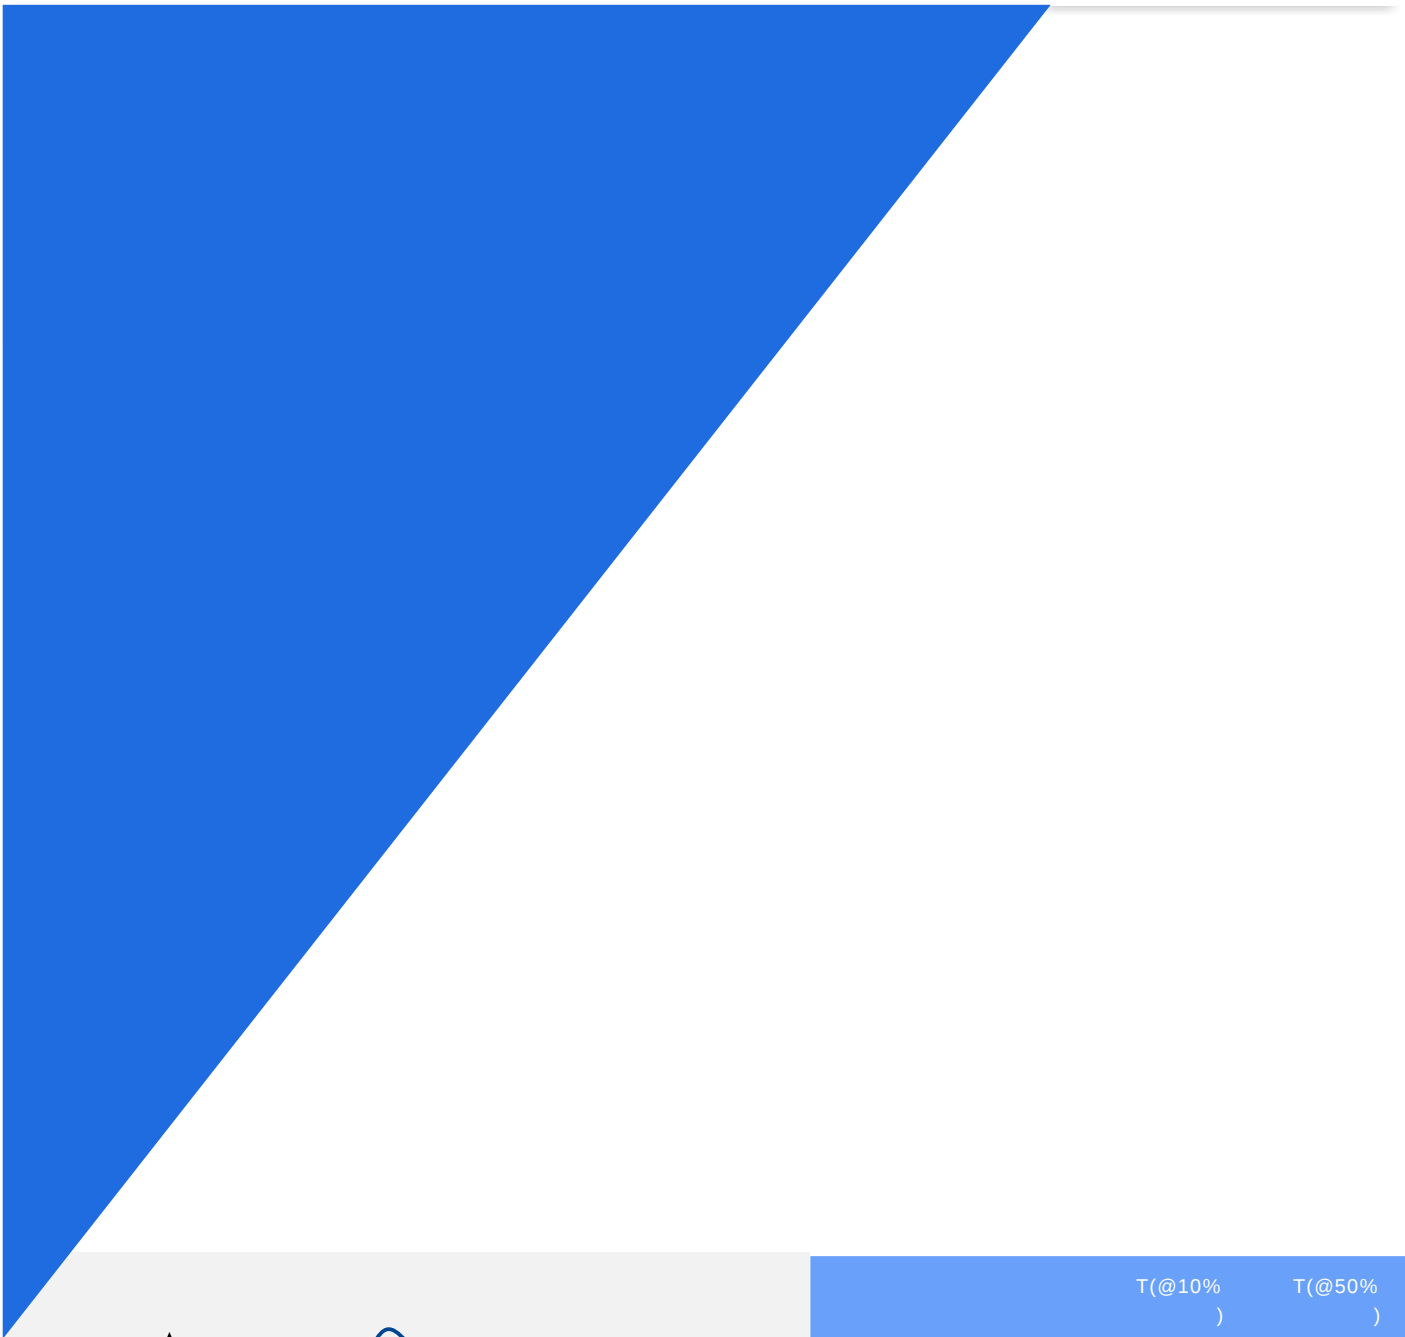


T(@10%)	T(@50%)
)	)

Vs. (/AOCA



Vs.

(V




Vs.

Vs.

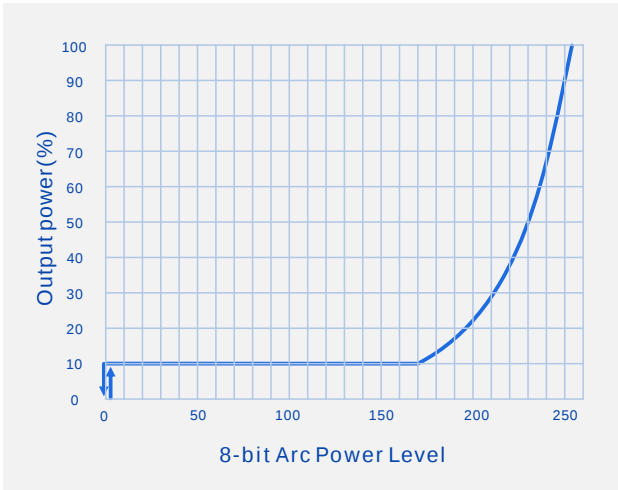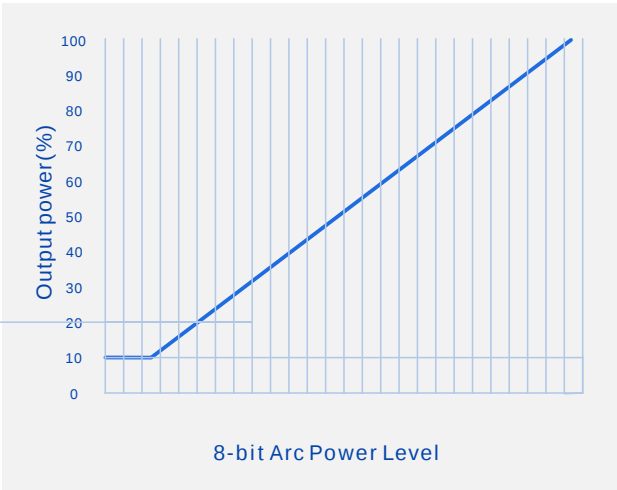

NTC



AC

AC160-264Vac

AC
AC

20Vac
10V

OTP

OTP

OTP

8

2

CLO

ELA


LED

50KH

50KH

4

NFC

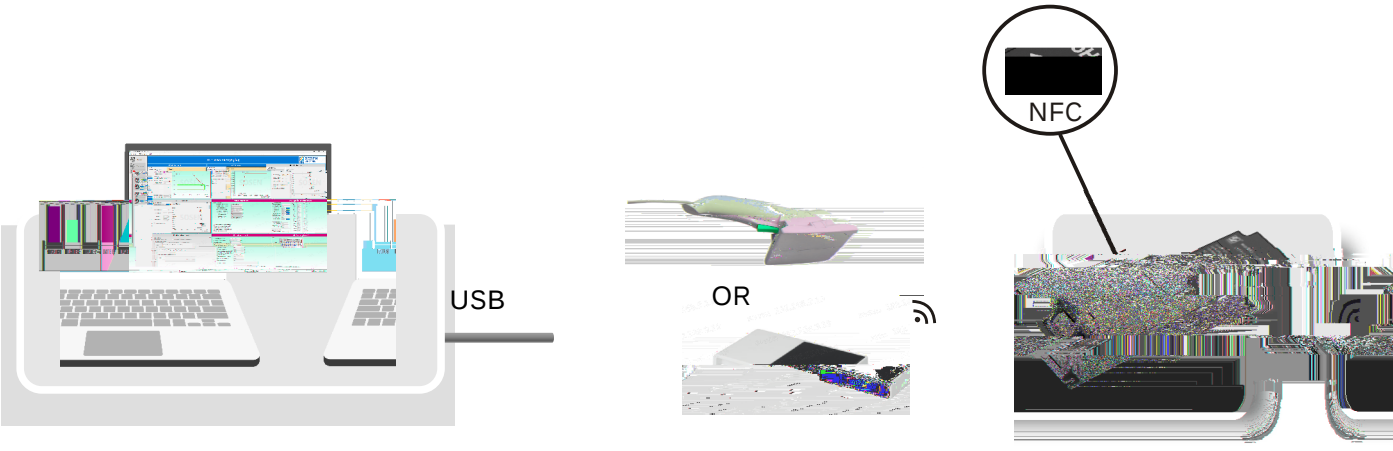

75W NFC

DALI-2 & D4i
