




	100Vac		277Vac	
	90Vac		305Vac	
	47Hz		63Hz	
			2.8A	100Vac


(120Vac)			60A	
(220Vac)			110A	冷机启动
(277Vac)			130A	冷机启动
			5W	220Vac/50Hz , 空载
	0.96	0.98		220Vac/50Hz , 满载
	0.90			100-277Vac/50Hz , 70-100%载
		8%	10%	220Vac/50Hz , 满载
			20%	100-277Vac/50Hz , 70-100%载





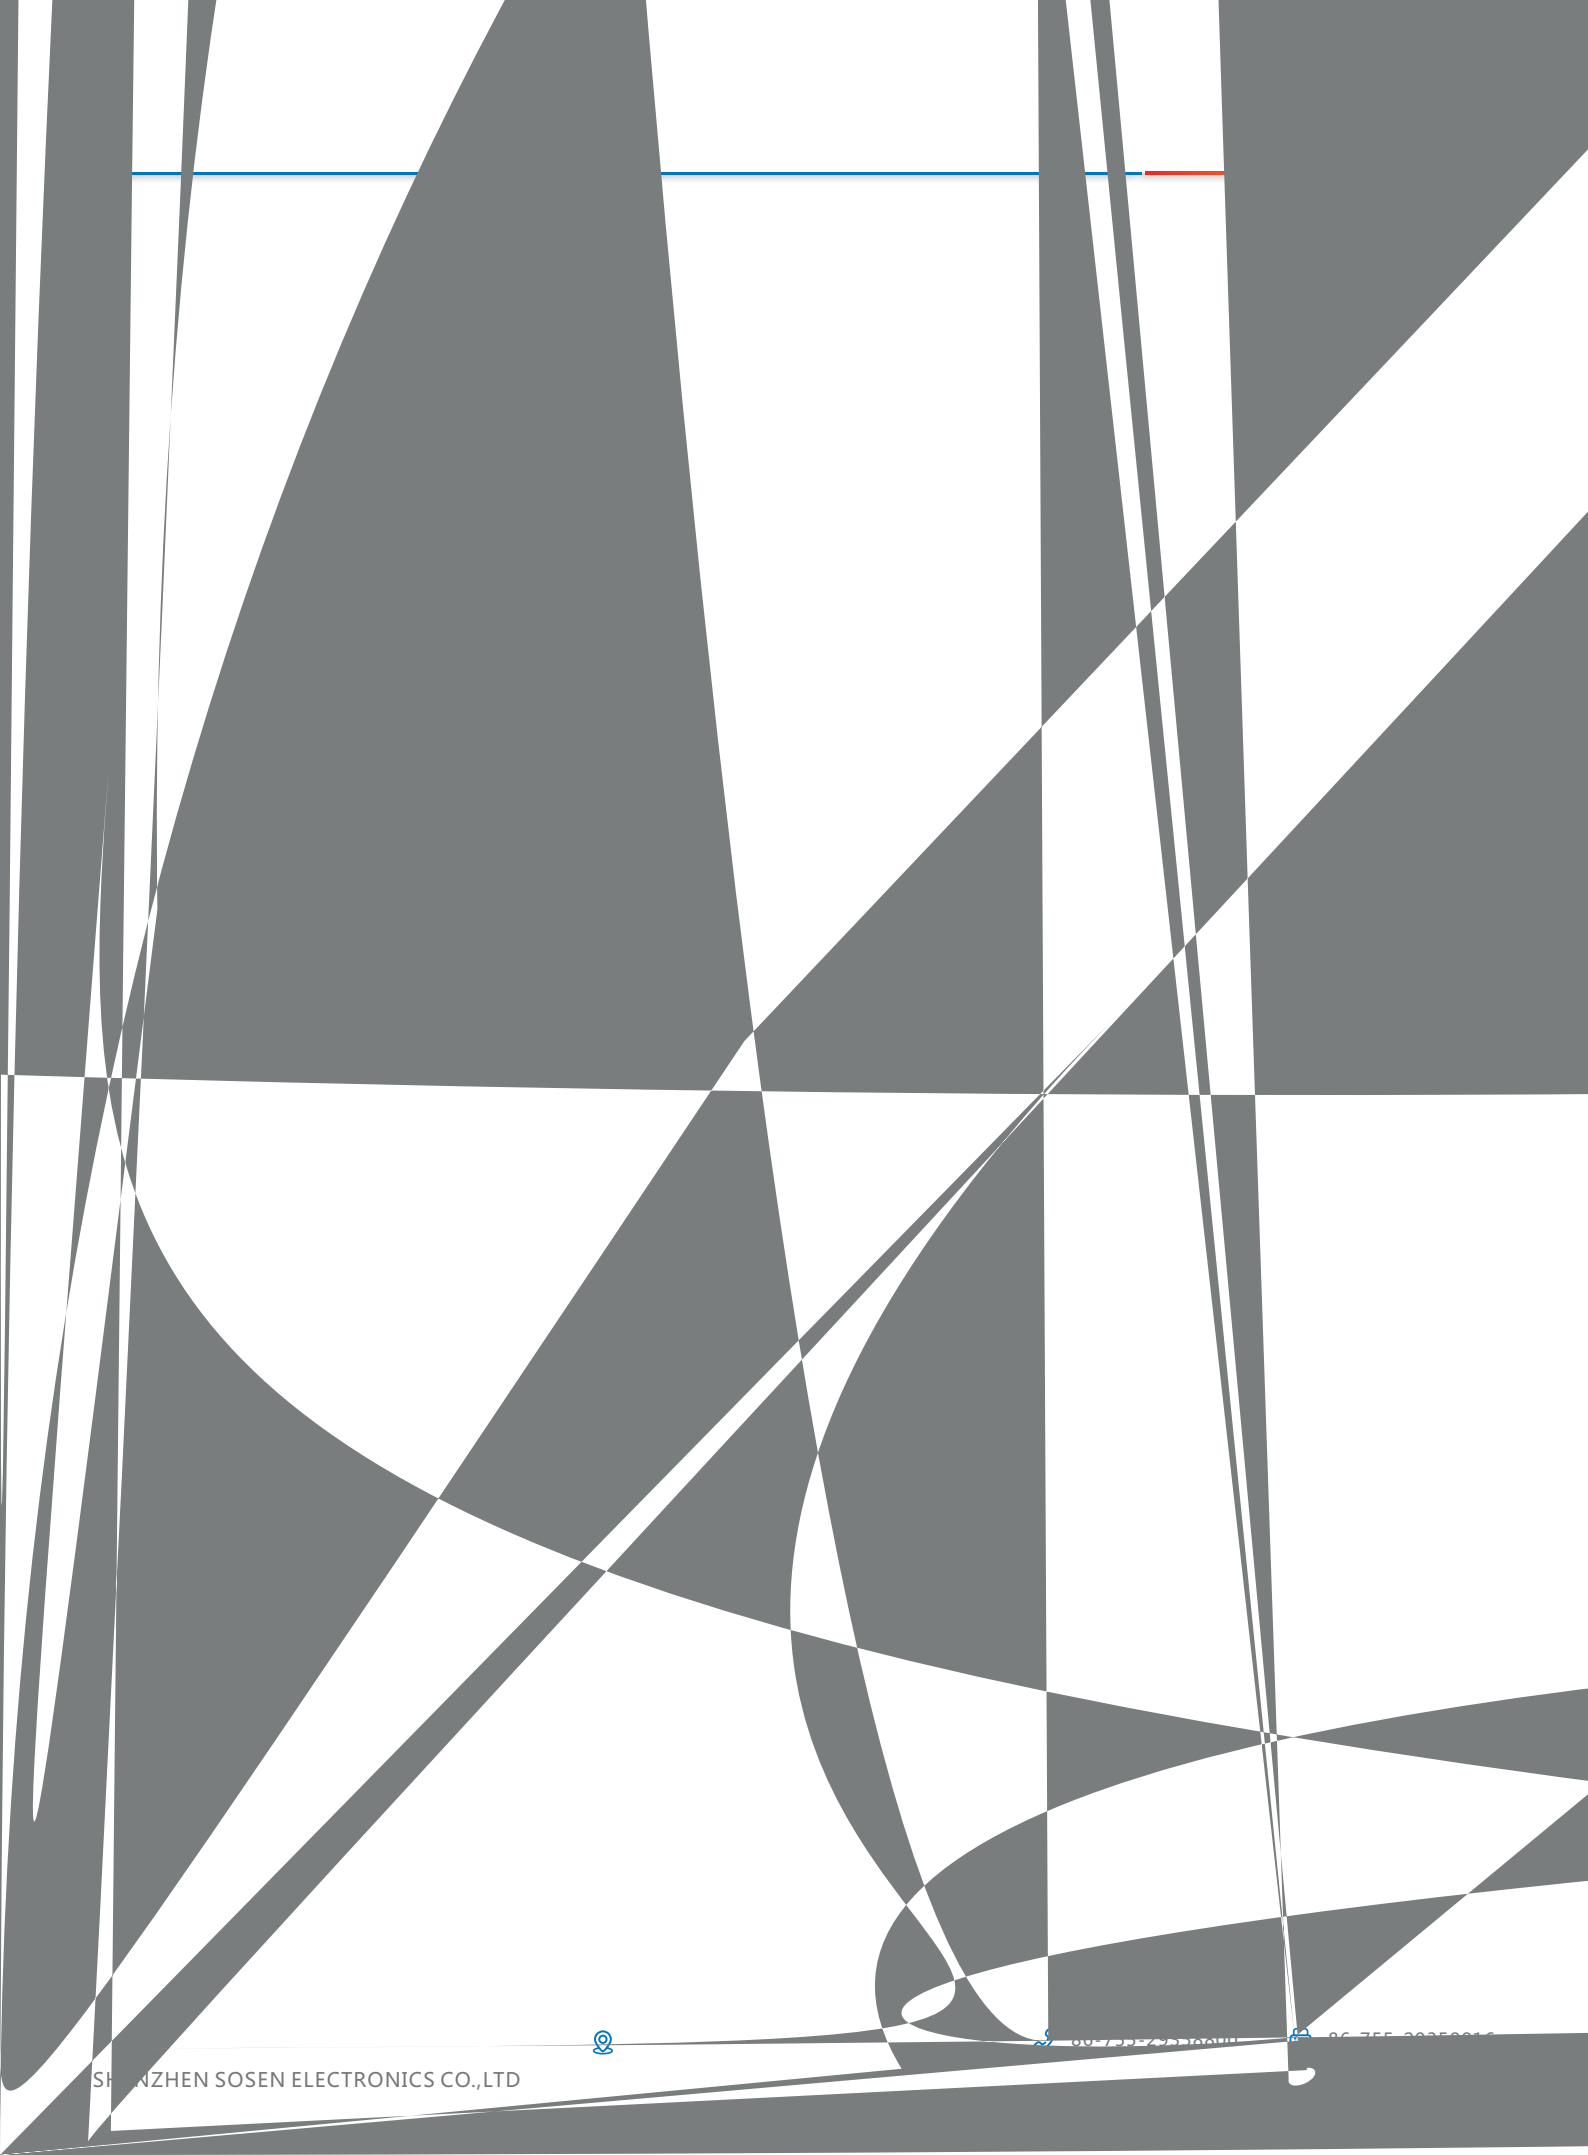







Vs.

Vs.


Vs. (50)

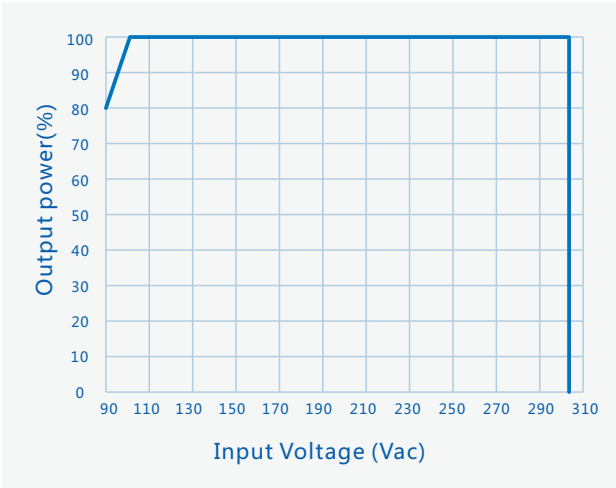


Vs.

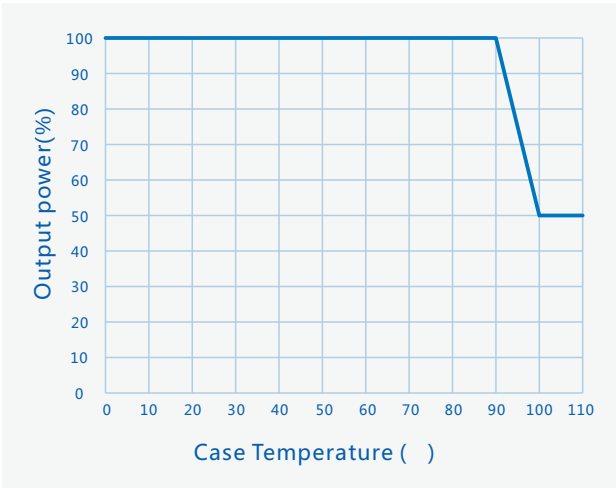

Vs.

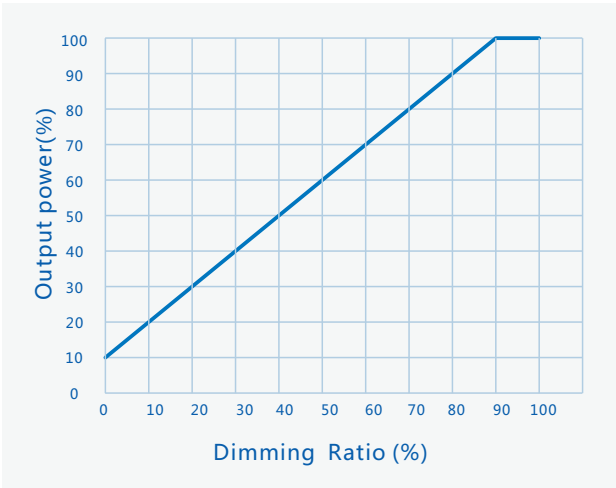

Vs.

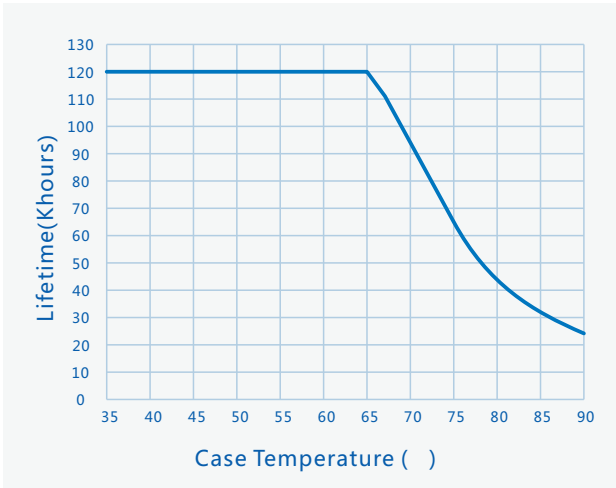





1 , , 704

2

- mm) : × × =495×385×162;

- 14

- 1.2kg

-

。


适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年产品要重新检验，合格后方可使用。

(

(



E'1 € sĐ)`!pOY• m Y !~