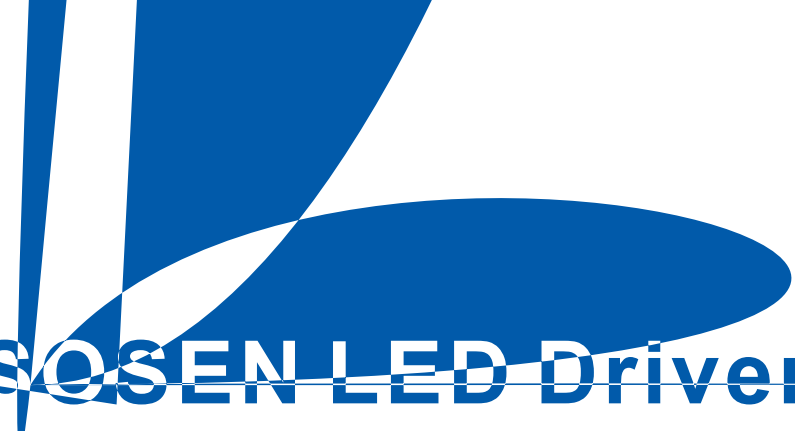


A large, abstract blue graphic in the top left corner, consisting of several overlapping curved shapes that resemble a stylized 'S' or a series of connected arcs.

SOSEN LED Driver, Your Smart Choice

q * D * O

: SS-500VP-HXX

: 500W LED

: V00


: 2023-04-16

A large, abstract blue graphic in the bottom right corner, consisting of several overlapping curved shapes that resemble a stylized 'S' or a series of connected arcs, mirroring the design in the top left.





	28V		56V	28-44V
	44V		56V	Po=Vo*Io=500W
	8.9A		11.4A	11.4A 44V,8.9A 56V
AOC	1.4A		11.4A	
			60V	

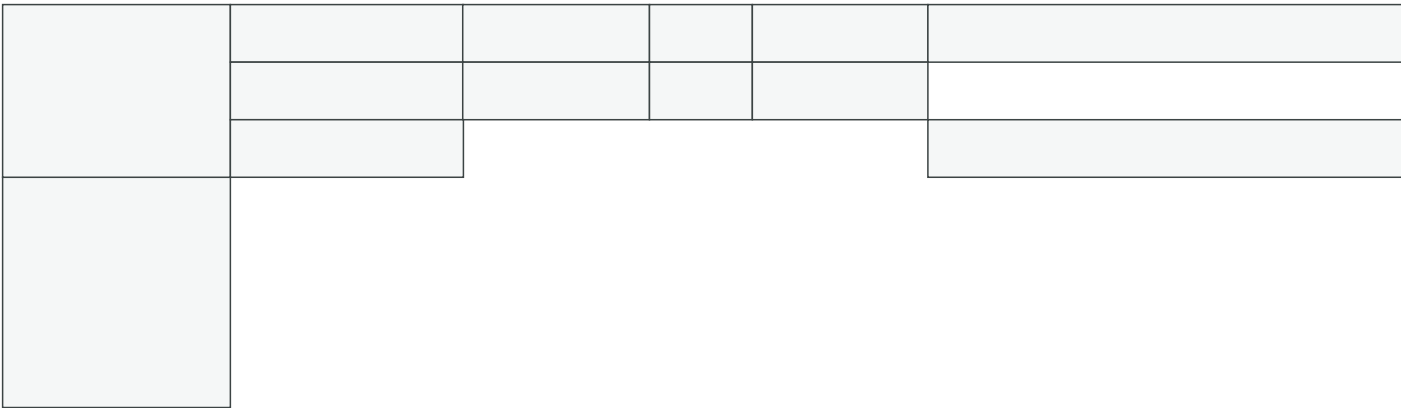




SS-

LED

Vs.

/AOC




SS-500VP-H

LED

0


Vs.

(Vin=220Vac)

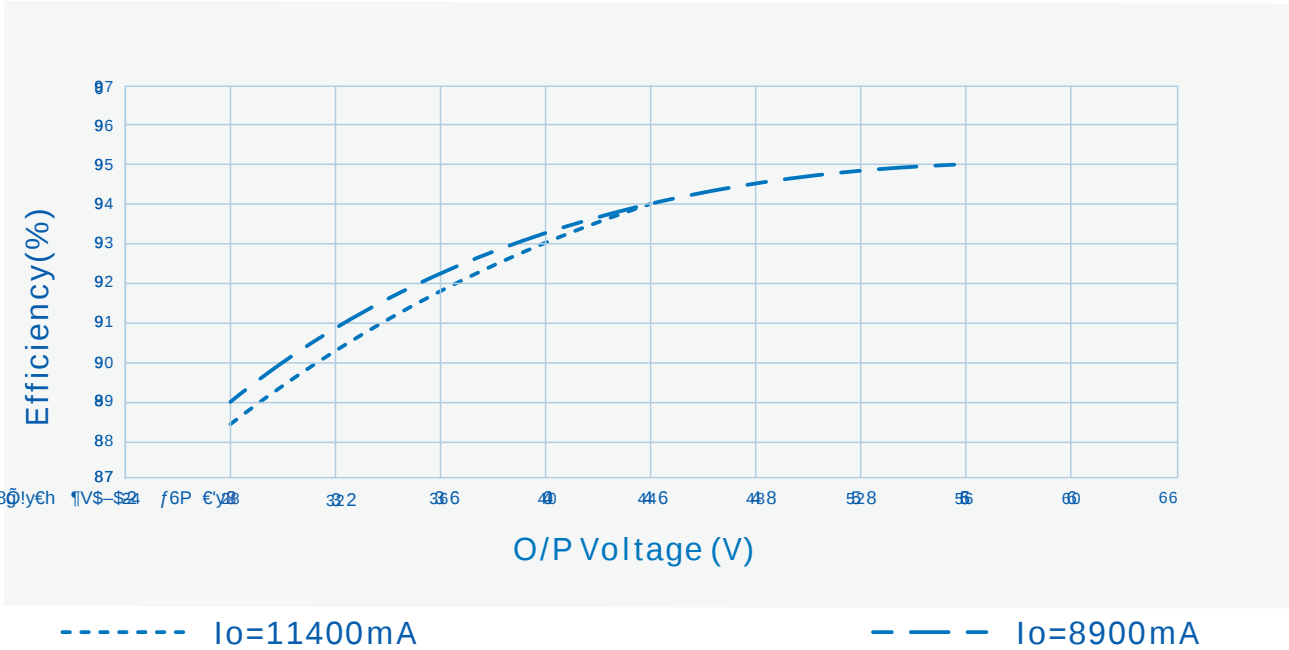


Vs.

(Vin=277Vac)

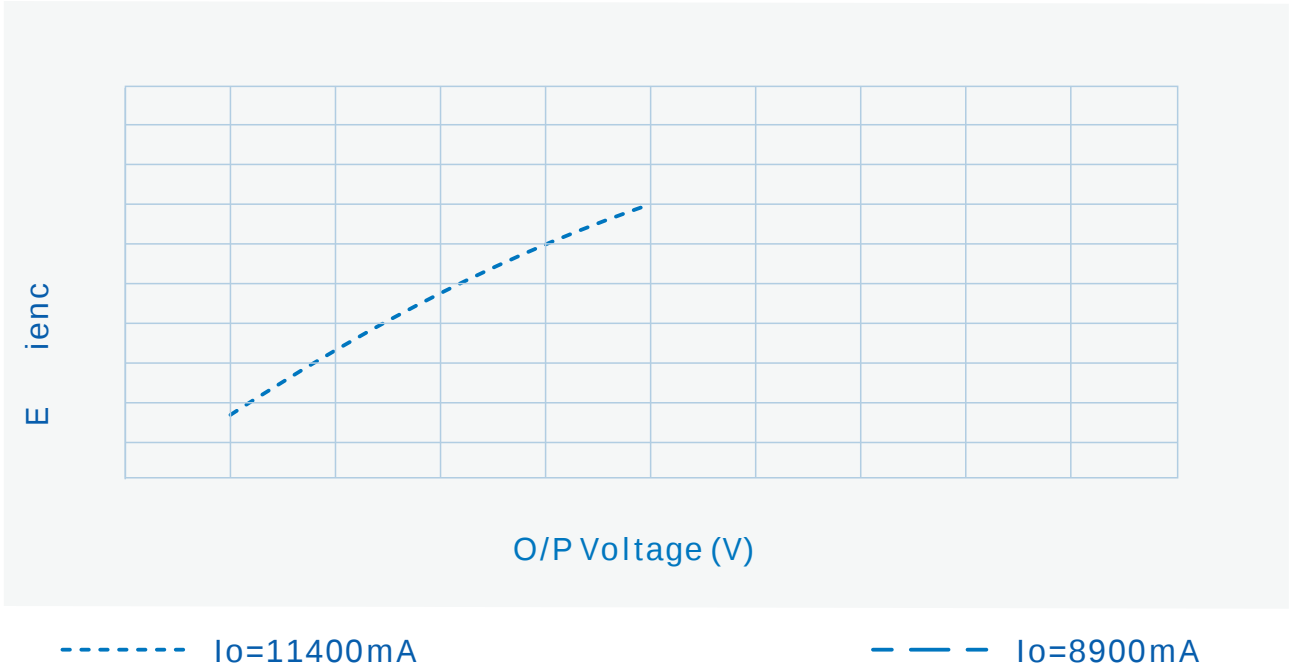

SS-500VP-H

LED

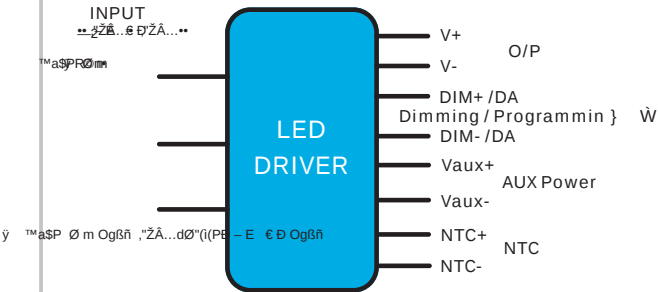

AC	(	450 ± 10 mm)		
SJOW	3*17AWG,	8.0mm	L	N
SJTW	3*16AWG	8.5mm	L	N
SJTW	3*18AWG	7.8mm	L	N
DC	(	250 ± 10 mm)		
SJOW	2*14AWG	8.8mm	V+	V-
SJTW	2*14AWG	9.0mm	V+	V-
BH/DH				
DIM	/	/	(	220 ± 10 mm)
21996	4*22AWG	5.6mm	DIM+	DIM- / Vaux+
/	Vaux-			
DHN				
DIM	/	/	(	220 ± 10 mm)
21996	4*22AWG	5.6mm	DIM+	DIM- / Vaux+
/	Vaux-			
	(	300 ± 10 mm)		
H05RN-F	2*1.0mm ²	7.0mm	NTC+	NTC-





1

- mm × × =493 × 385 × 132;
- 7
- 2.27kg 16.9kg
-

GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU



V00		2023/04/16	

