





--	--	--	--	--

--



				=
--	--	--	--	---

--	--	--	--




Vs.

/AOC




Vs.

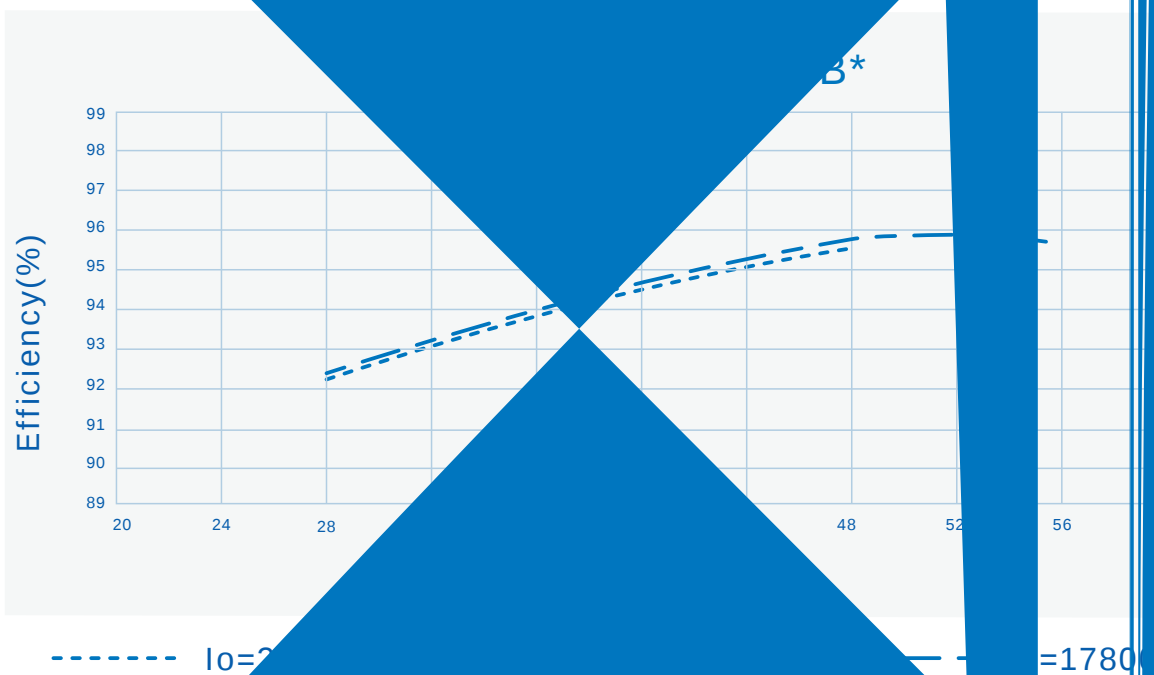


Vs. ()

Vs.

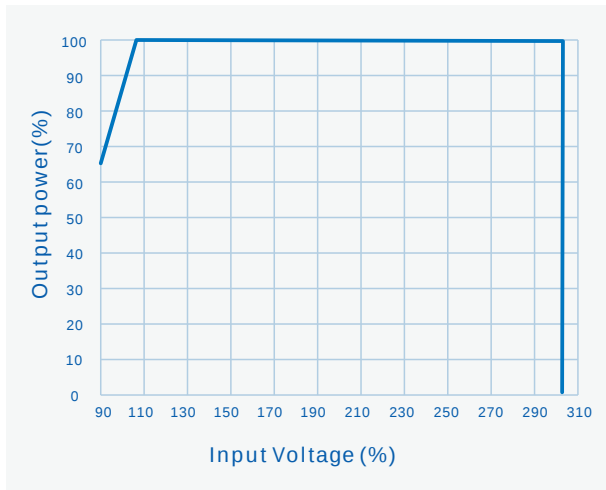

Vs.

Vs.

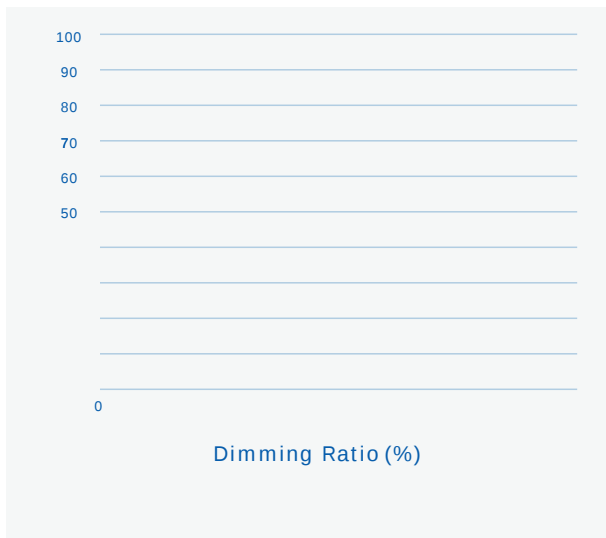


	(其它)
	(BHB*)

0V



BHB

INPUT

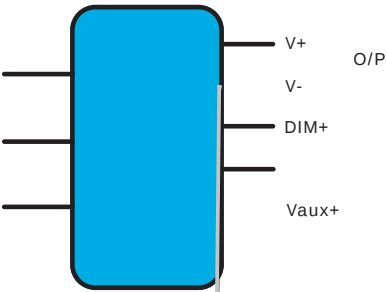

AC (450 ± 10mm)
SJOW 3*17AWG, 8.0mm L, N,
SJTW 3*16AWG 8.5mm L, N

DC (250 ± 10mm)
SJOW 2*12AWG, 10.7mm V+ V-
SJTW, 2*12AWG 9.2mm V+ V-

DIM / /
,RJ25






/RJ25




PLUG



JACK

RJ25 PIN	
1&6	VPP+
2&5	DIM+
3&4	DIM-/VPP-

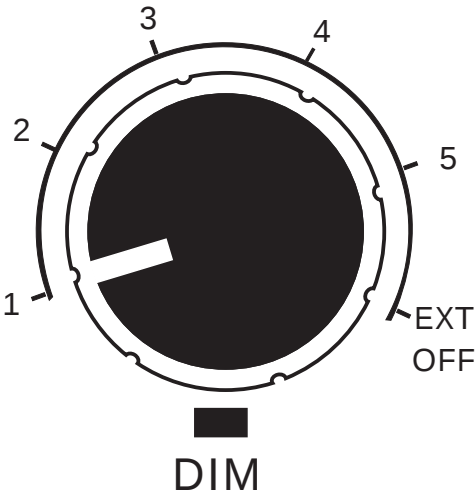

1	40%loset
2	50%loset
3	60%loset
4	80%loset
5	100%loset
EXT/OFF	/

SS-1000VP-E集成

LED



1

- mm × × =577 × 385 × 162;
- 5
- 3.70kg 20kg
-

GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU

