


: SS-120CNL-E260*

: 120W LED


: V06

: 2025-08-05



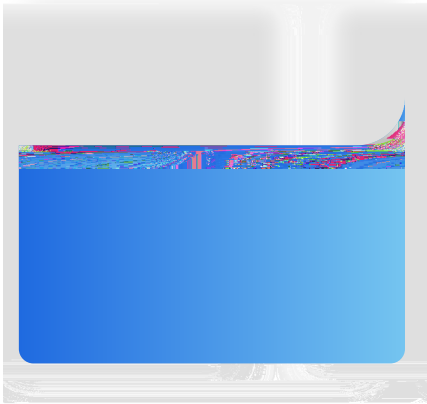

- 95%
- 0-10V PWM
- 12V/0.2A
-
- / /
- IP65
- 6kV/ 6kV
- 5



LED

			.6A	
	180V		260V	
	200V		260V	V * S
	0.46A		0.6A	


u~•pff* dGua6POĐ

			310V	

--	--

Wpřítřep²AT395Cě—e WBù fš• xSP


[illegible]



SS-120CNL-E260*

LED



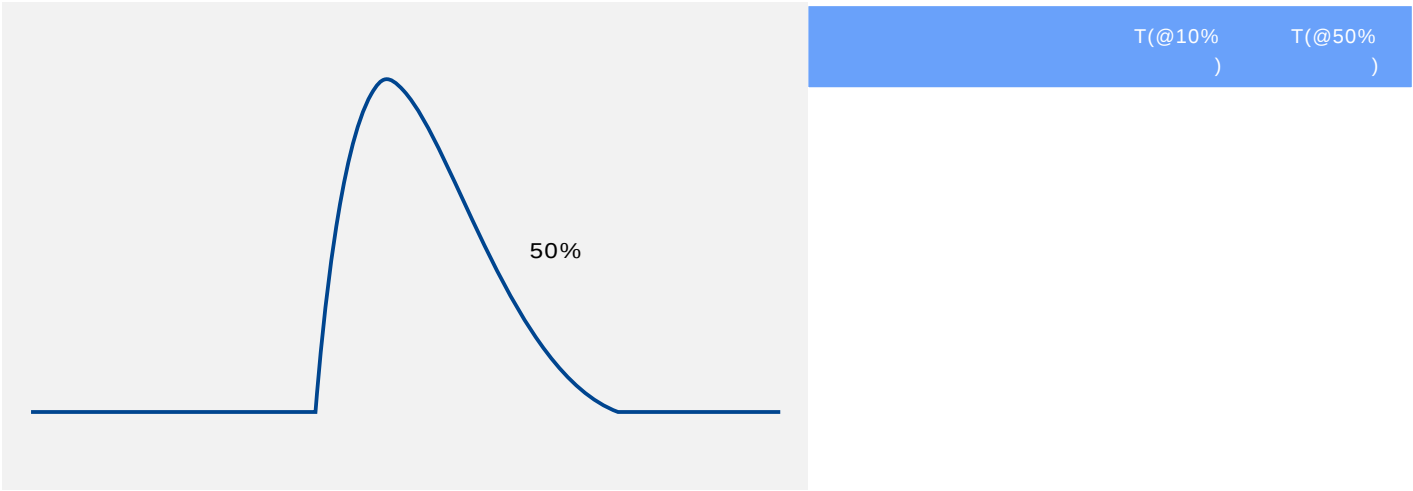



Vs.

I_{ACC}




Output V_o

----- Dimmin


DC W Si

Vs.

(V_{in}=120Vac)



Vs. (Vin=220Vac)

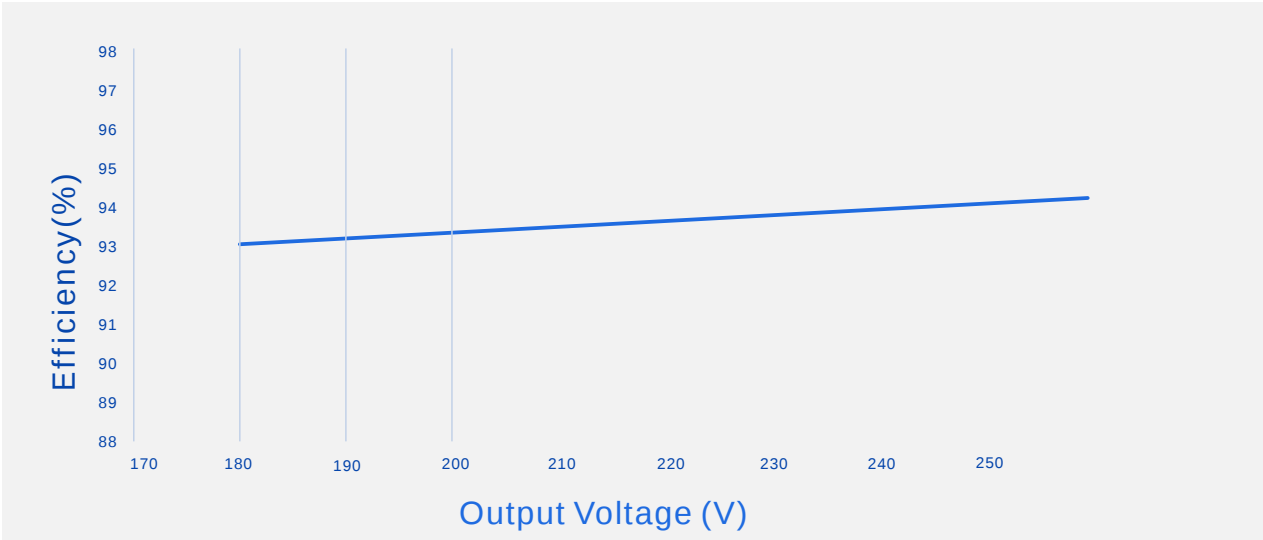


Vs. (Vin=277Vac)

SS- 0 260*

Vs.

Vs.




SS-120CNL-E260*

LED

Vs.

Vs.

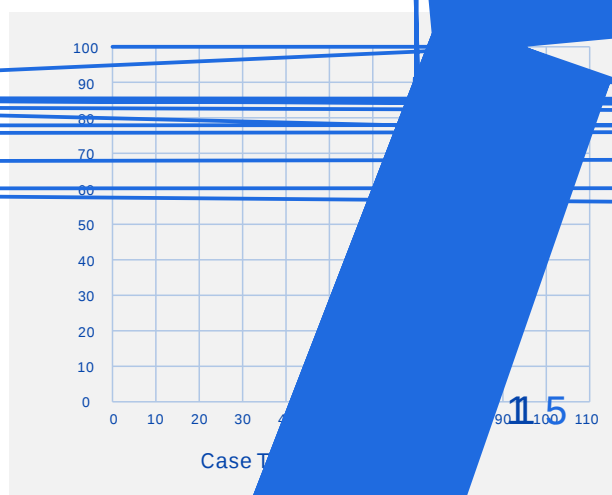

Vs.

Vs.

SS-120CNL-E260*


LED

		mm(In.)
	4-B	Φ7.0(0.28)
	D	Φ128(5.04)
	H	62.5(2.46)
	Z	M10*1.5(18mm) G1/2(18mm)
	R	M4*0.7
	W	113(4.45)
Tc	Y	32(1.26)

1LED ;

2ACDCDIM / / :

43±5mm10±2mm;

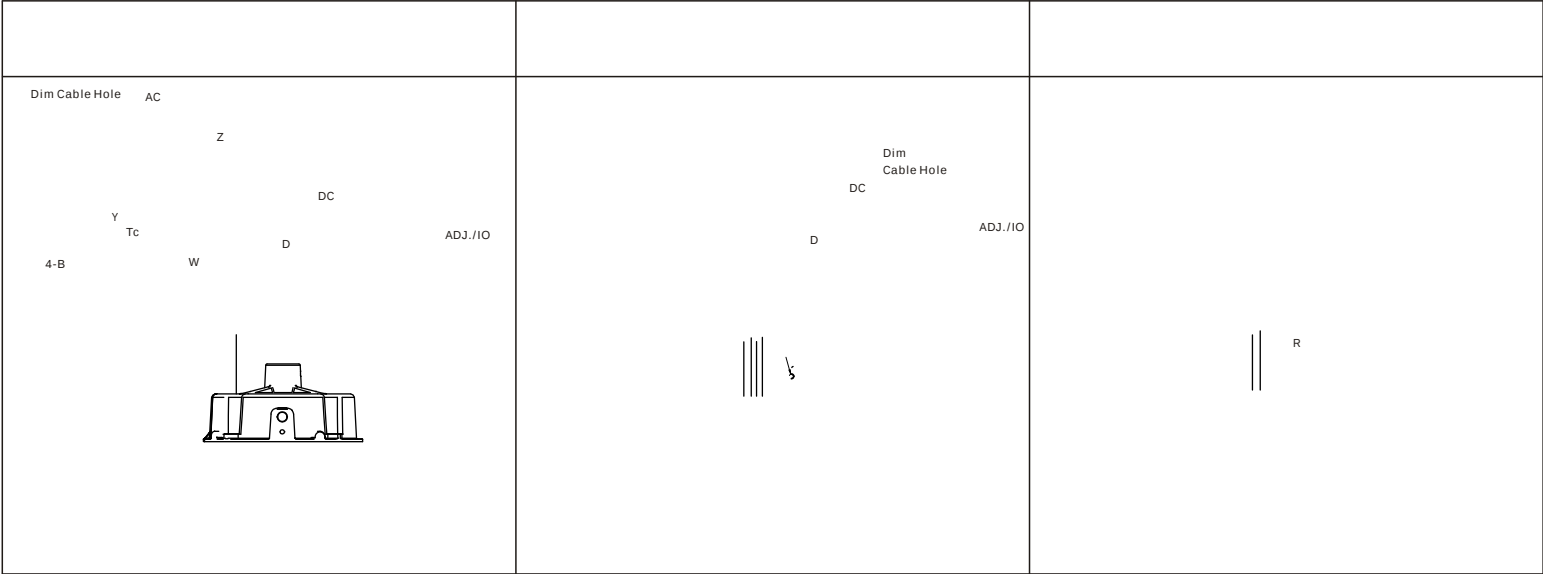



1		,		,	704
2					
3			5mm		
4	LED+	LED-		1.8mm	
5					
6	LED				
7	LED				
8			LED		Ř

-		mm	×	×	=577 × 385 × 162;
-		15			
-	0.825kg			14kg	
-					

--	--	--	--	--	--

	GB 3873	83
1		

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------

