



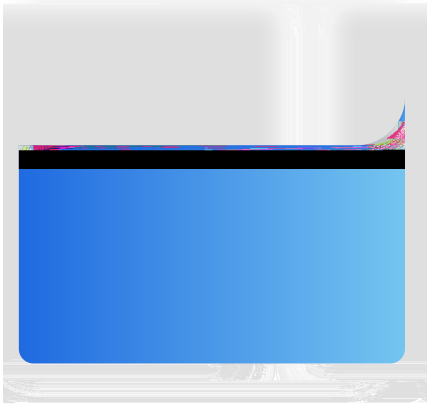

/0

% z * /



				%
				%
				12a
				120Vac

--

220Vac/50Hz (BH)
220Vac/50Hz
220 ⁰ Vac/50Hz
120-277Vac/50Hz 70-100%

SS-150CNL-E(62)

LED



--	--	--	--	--

	180V		260V	
	200V		260V	Po=Vo*Io=150W
	0.57A		0.75A	0.75A 200V,0.57A 260V
AOC	0.52A		0.75A	
			310V	

--




Tcase	-40			
	-40			
	1			

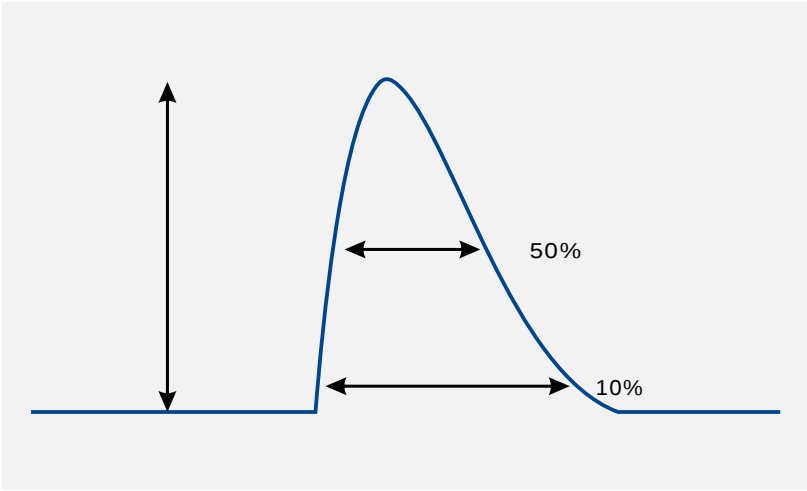


		T(@10%)	T(@50%)
120Vac	60A	620u	
220Vac	100A		300uS
277Vac	130A		

Vs. (/AOC)



----- Dimming Window ————— AOC Window


Vs. (Vin=120Vac)




Vs.

Vs.

Vs.




Vs.

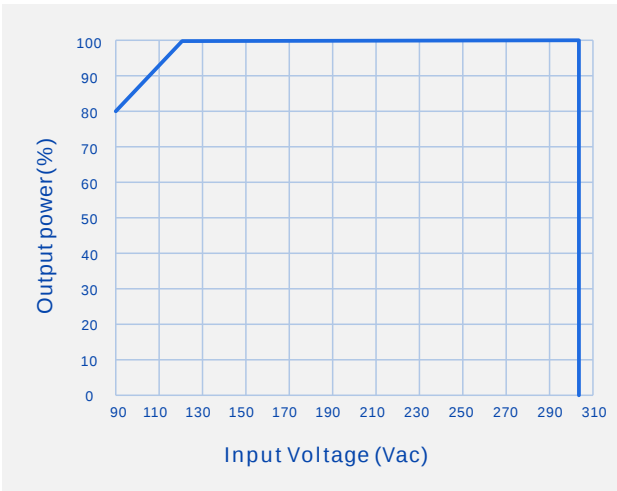

Vs.

Vs.

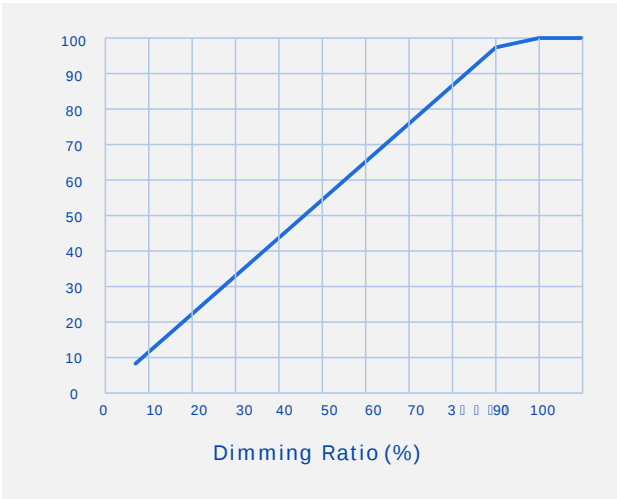

Vs.

BH Type

B Type



GB 3873 83

1



V00		2023/06/15	
V01		2025/08/07	