




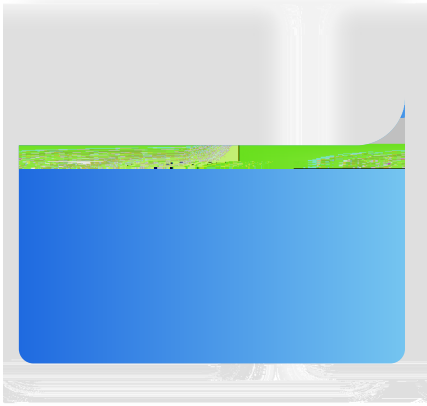




				120Vac

				220Vac/50Hz (BH)
				220Vac/50Hz
				120-277Vac/50Hz 70-100%
				220Vac/50Hz
				120-277Vac/50Hz 70-100%







SS-150CNL-E(64)

LED

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

EMI/EMS	/	
	EN IEC 55015:2019+A11:2020	
	EN IEC 55015:2019+A11:2020	
	IEC/EN 61000-3-2:2019+A1:2021	Class C
	IEC/EN 61000-4-12;ANSI/C82.	

SS-150 E(64) LED

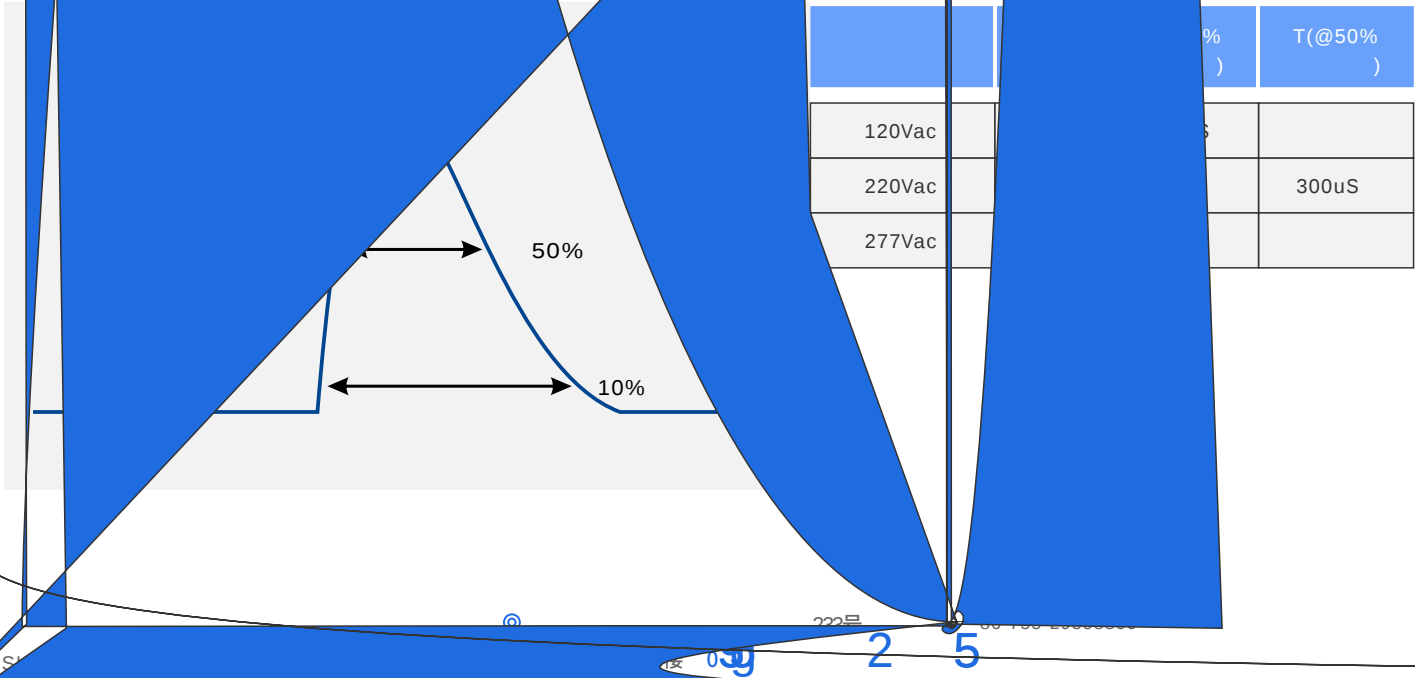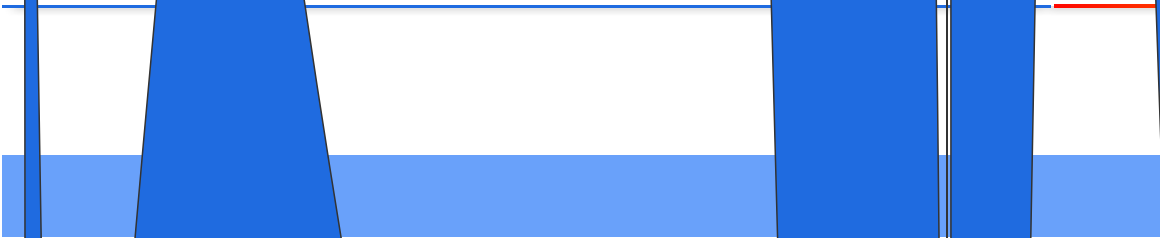




Vs. (

SS-150CNL-E(64)

LED


Vs. (Vin=220Vac)

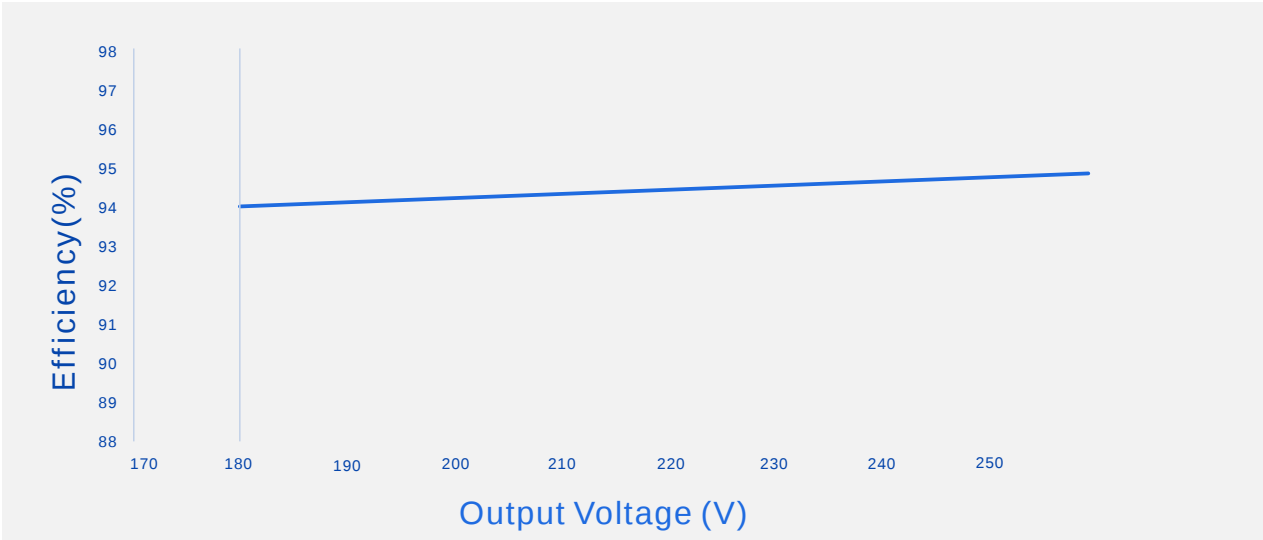

Vs. (Vin=277Vac)

Vs.

Vs.




----- Vin=120Vac

- - -

Vs.


Vs.

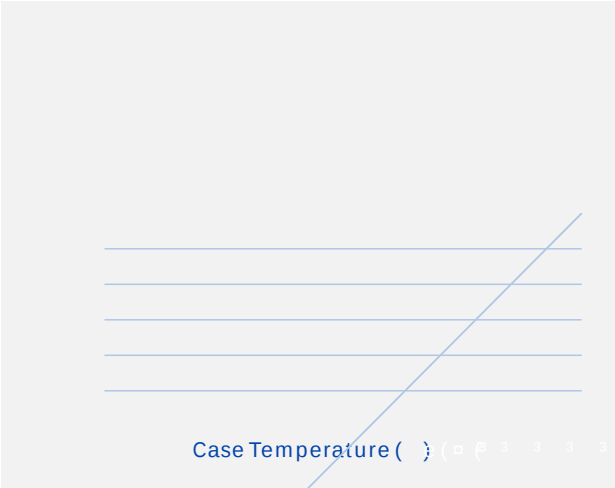


Vs.

Vs.


DALI

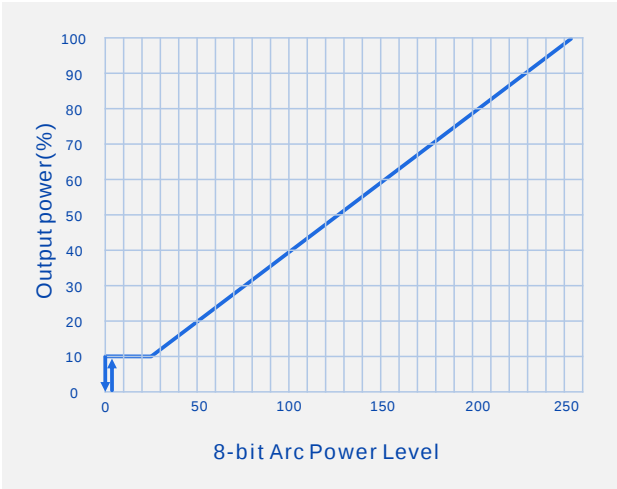


DALI

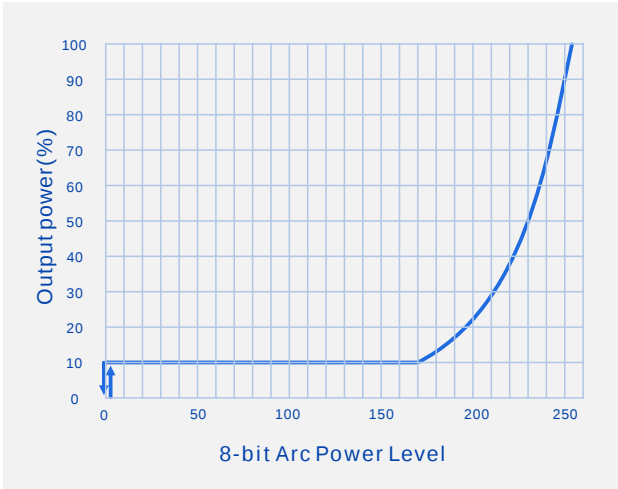







V00		2022/06/30	