






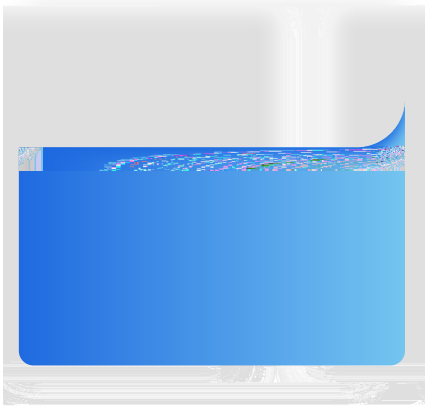





0-10V			12V	
			100%loset	
			10V	
	PWM		10.2V	
	PWM		0.3V	
PWM	PWM	1KHz	2KHz	
	PWM	0%	100%	
		0Kohm	100Kohm	
		10%cur Sak	—	100%loset

	≤ 85	≥ 50,000 hours	
MTBF	200,000 hours	220Vac, , 25 (MIL-HDBK-217F)	
	IP65		
	90		
	3200lm	3200lm	85
	850g		
	Φ128mm*62.5mm		x

--	--	--	--	--


Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

EMI/EMS	/	
---------	---	--

	EN IEC 55015:2019+A11:2020	
	EN IEC 55015:2019+A11:2020	
	IEC/EN 61000-3-2:2019+A1:2021	Class C


--	--	--

1.	EMC			EMC
2.	L/N	/	/	
3. CCC		IEC 60598-1:2014	10.2	" "

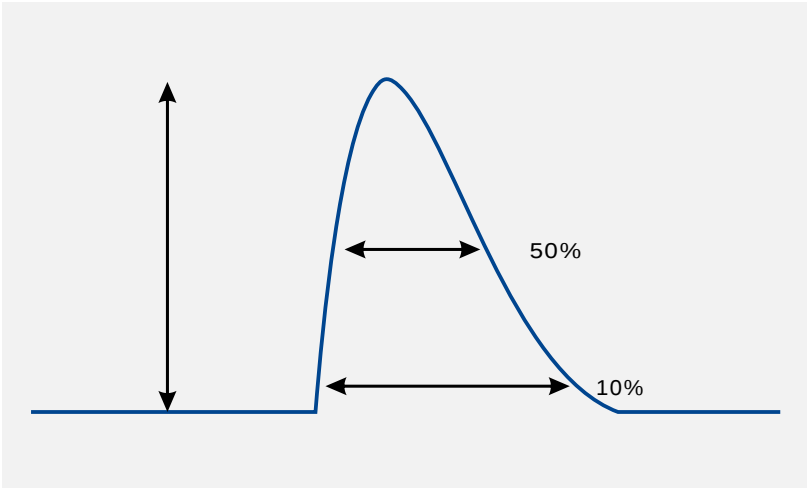


		T(@10%)	T(@50%)
120Vac	60A	620uS	
220Vac	100A		300uS
277Vac	130A	630uS	

Vs. (/AOC)

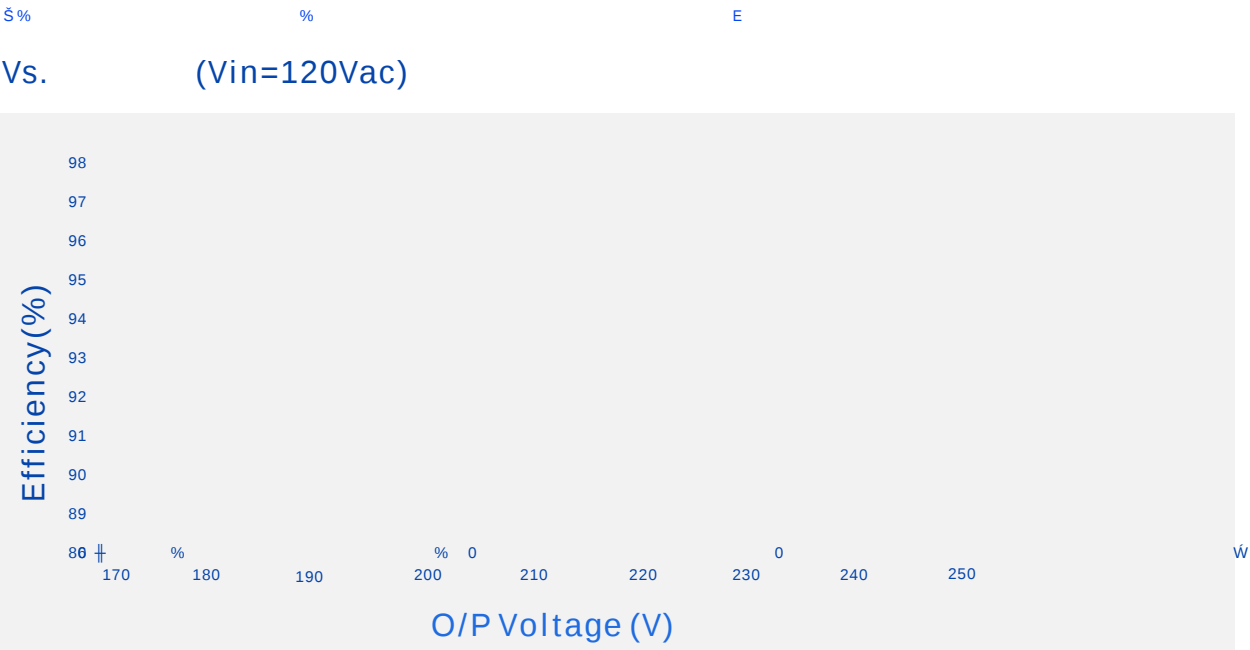


Vs. (Vin=220Vac)

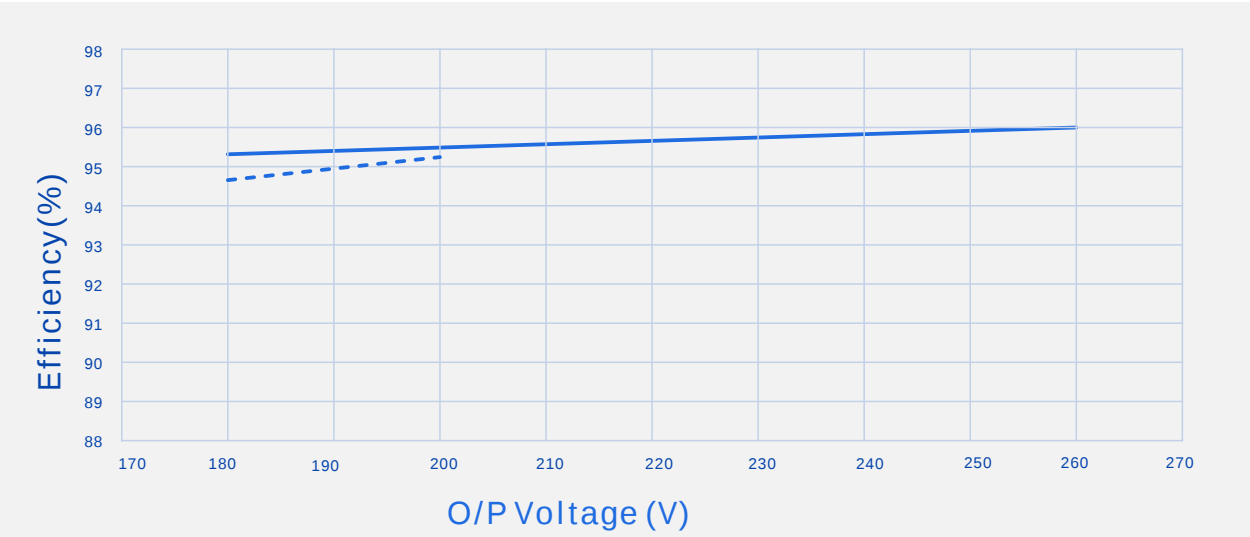

----- Io=1000mA

———— Io=770mA

Vs. (Vin=277Vac)

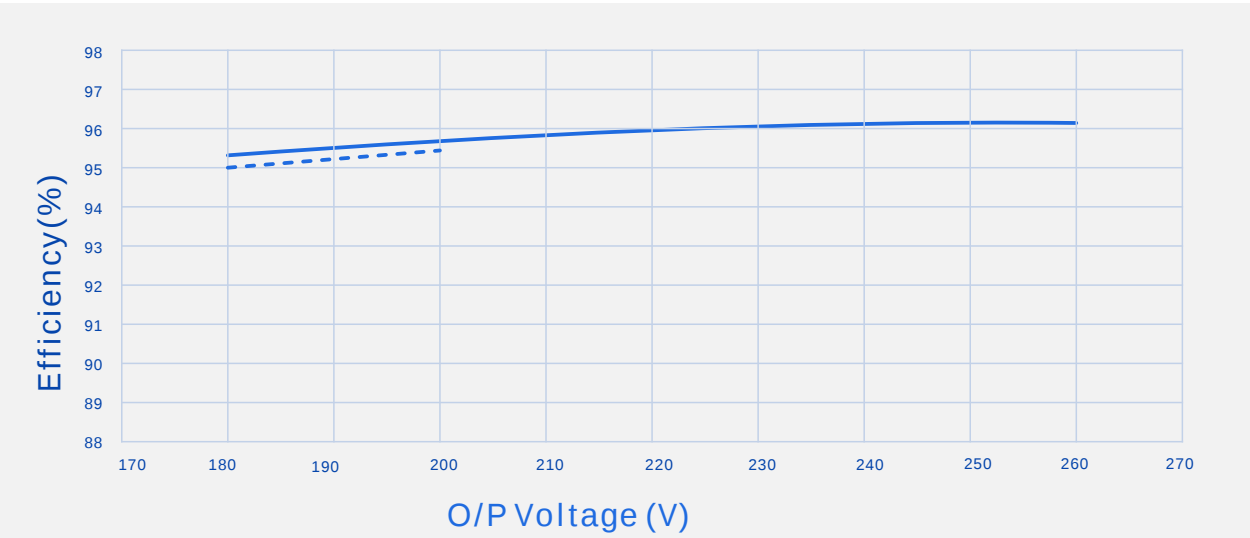


----- Io=1000mA

———— Io=770mA

Vs.

Vs.



Vs.

Vs.

m

- mm × × =577 × 385 × 162;
- 15
- 0.85kg 14.5kg
-

GB 3873 83

