
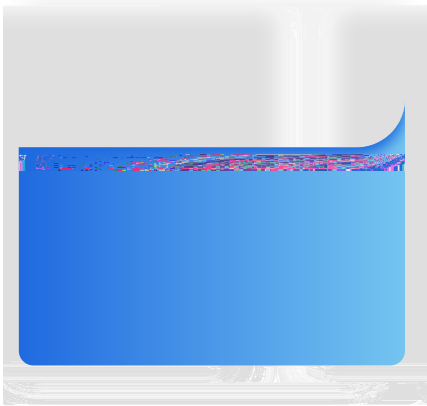


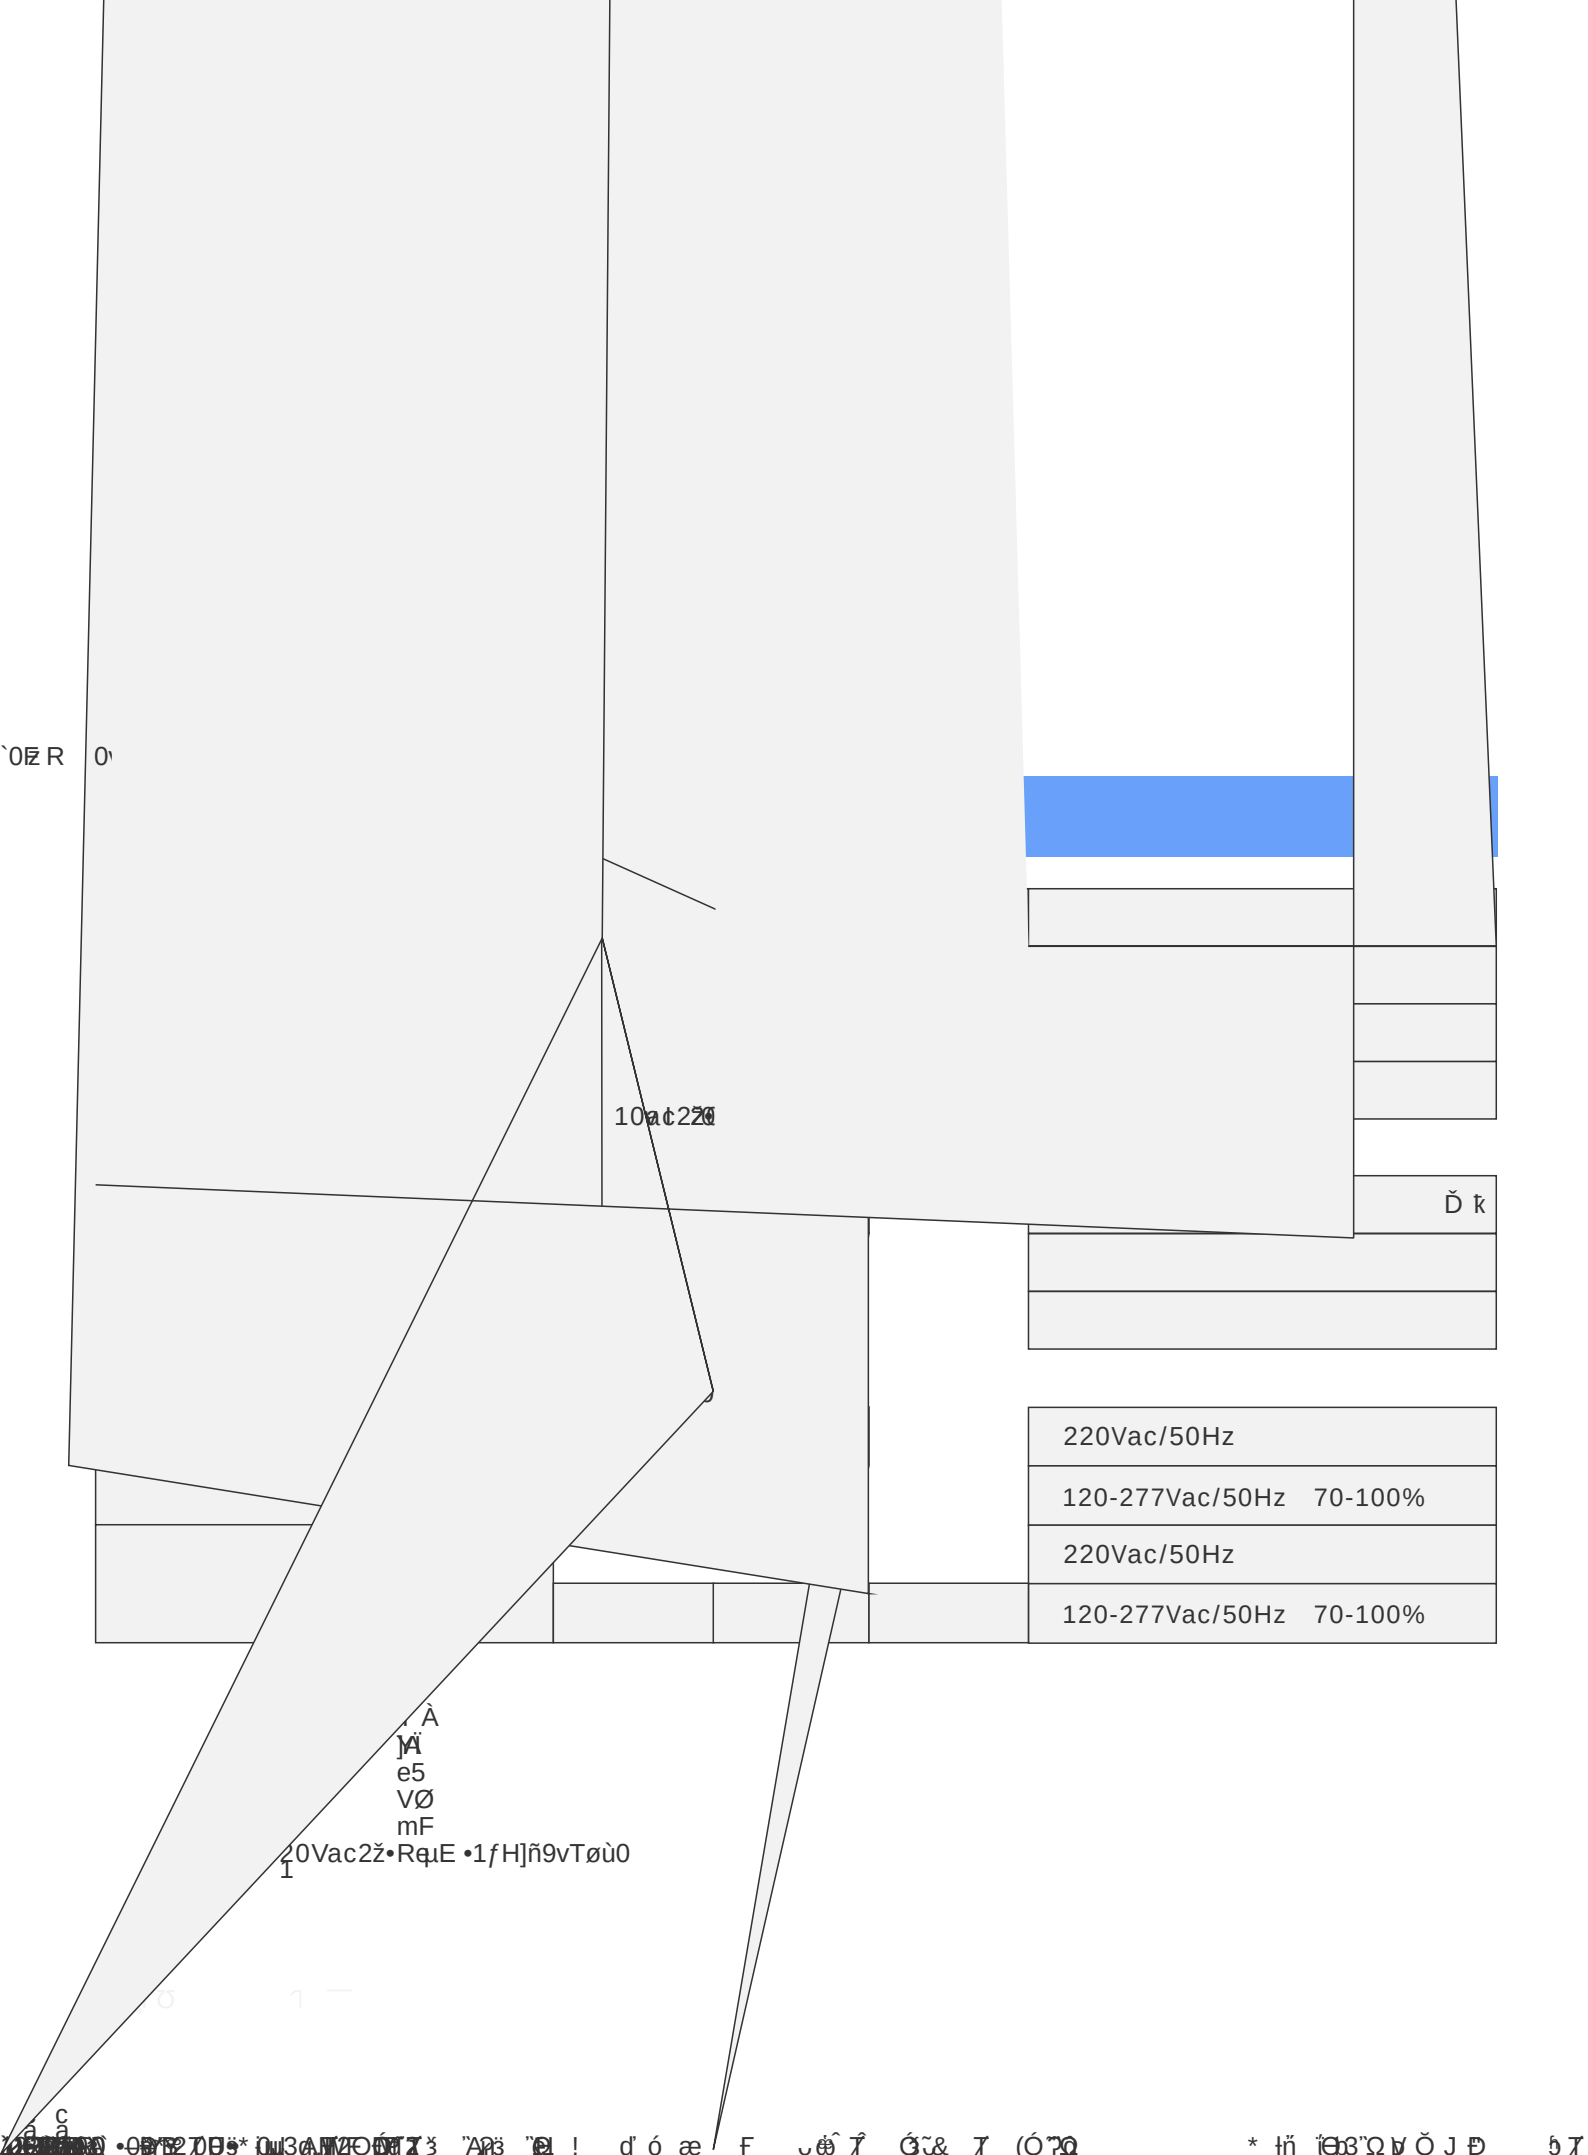

00R 0'

10at220

Đ k

220Vac/50Hz
120-277Vac/50Hz 70-100%
220Vac/50Hz
120-277Vac/50Hz 70-100%

A
M
e5
VØ
mF
20Vac2ž•RqμE •1fHJñ9vTøù0

BHD

+

BHB

SS-200CNL-E260*(62)

LED

--	--	--	--	--

	180V		260V	
	200V		260V	η $P_o=V_o \cdot I_o=200W$
	0.77A		1.0A	1.0A 200V,0.77A 260V0.0A0.0A
	0.75A		1.0A	

			310V	

--

SS-200CNL-E260*(62)

LED

AUX		10.8V	12V	13.2V	
				200mA	
0-10V		0V		12V	DIM+ 100uA
		10%Iomax		100%Ioset	DIM+/DIM-
		0V		10V	
PWM	PWM	9.8V		10.2V	
	PWM	0V		0.3V	DIM+ 100uA
	PWM	1KHz		2KHz	DIM+/DIM-
	PWM	0%		100%	
		0Kohm		100Kohm	DIM+ 100uA
		10%Iomax		100%Ioset	
		0.7V	0.8V	0.95V	()
		0.95V	1.1V	1.2V	()
	≤ 85	≥ 50,000 hours			80% ,220Vac
MTBF		200,000 hours			220Vac, , 25 (MIL-HDBK-217F)
		IP65			
		90			
		5			85
		850g			
		Φ128mm*62.5mm			X

25

LED

--	--	--	--	--


Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--

UL/cUL	UL8750	✓	
TUV	EN 61347-2-13:2014/A1:2017 EN61347-1:2015 EN62493:2015		
RCM	AS/NZS61347.2.13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		

EMI/EMS	/	
---------	---	--

	FCC Part 15 Subpart B; ANSI C63.4:2014	120Vac: Class B, 277Vac: Class A
	FCC Part 15 Subpart B; ANSI C63.4:2014	120Vac: Class B, 277Vac: Class A
	IEC/EN 61000-3-2:2019+A1:2021	Class C
	IEC/EN61000-4-5	B (6kV/12Ω, 6kV/2Ω)
	IEC/EN 61000-4-12	B(4kV, 4kV)

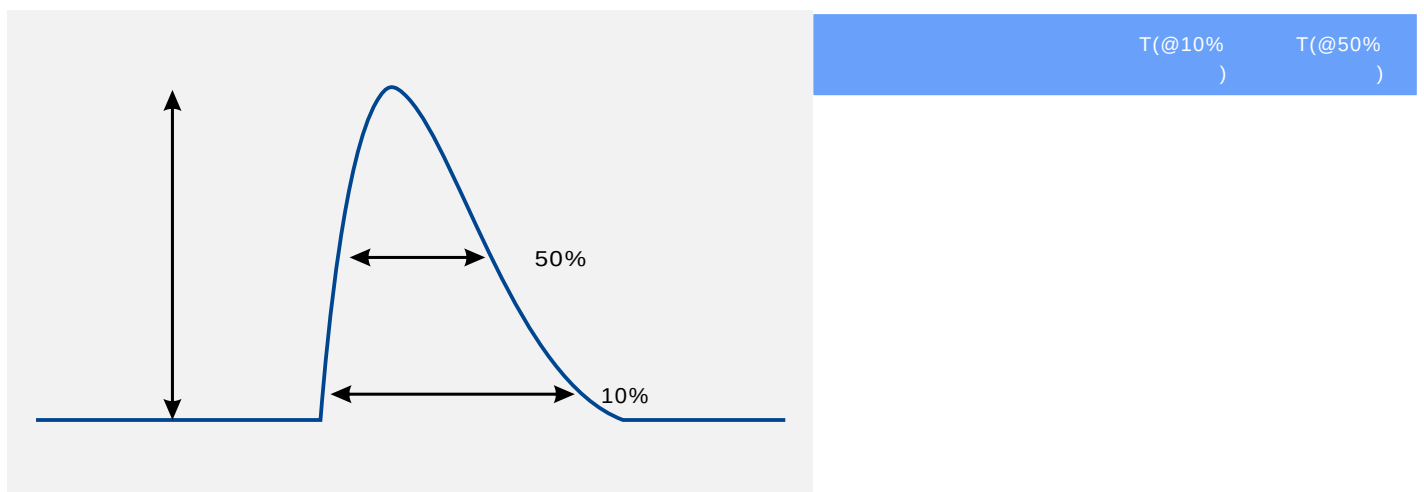

§-2

20 90

9

290

999a

!

290

æ929 íæ

പം റ്റു

%


0000 892955B 0591A499

m h

À

 $\hat{A}^2 R$ $\mathcal{A}$


Vs. (Vin=220Vac)

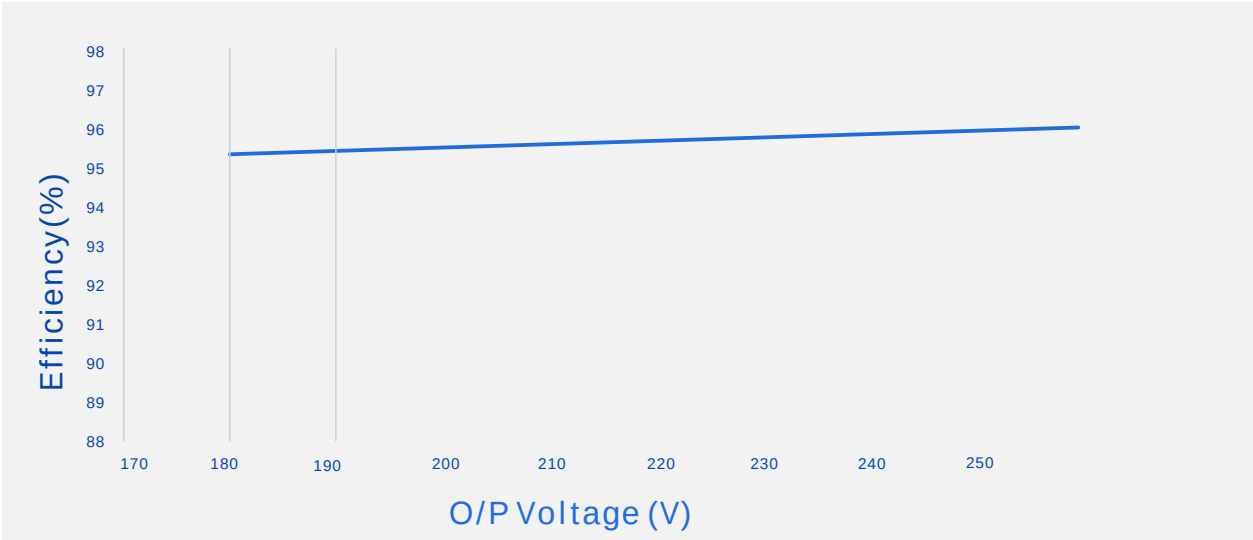


Vs. (Vin=277Vac)

Vs.


Vs.




Vs.

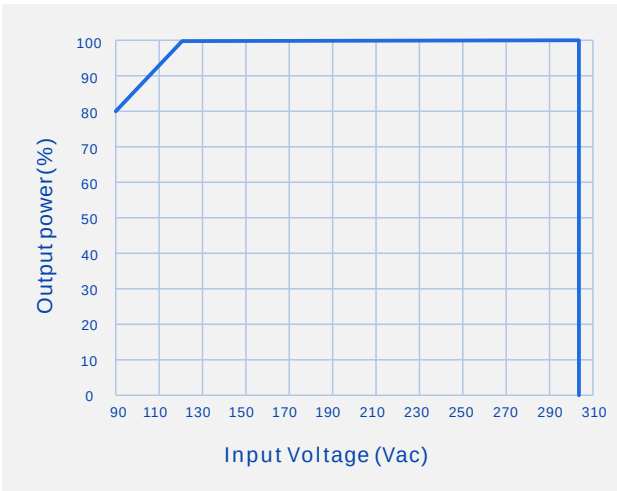

Vs.

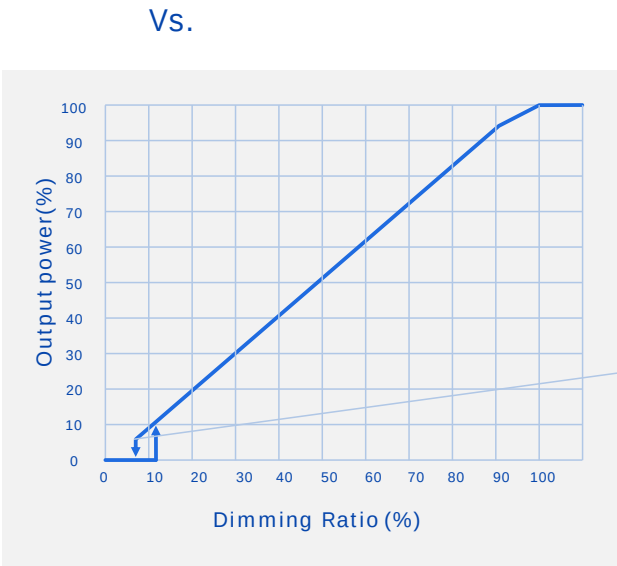

Vs.

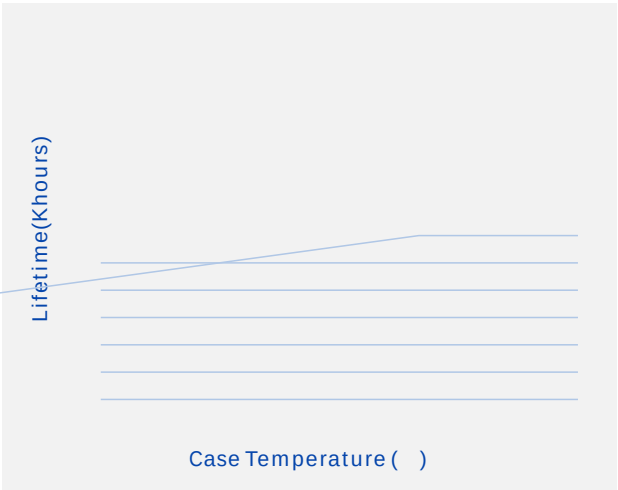



N ě



1		,		,	704
2					
3			5mm		
4		LED+	LED-	1.8mm	
5					
6	LED				
7	LED				
8			LED		


-		mm	×	×	=577 × 385 × 162;
-		15			
-	0.85kg			14.5kg	
-					

--	--	--	--	--	--

	GB 3873	83
1		

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------



V00		2023/06/15	
V01		2025/08/07	

