



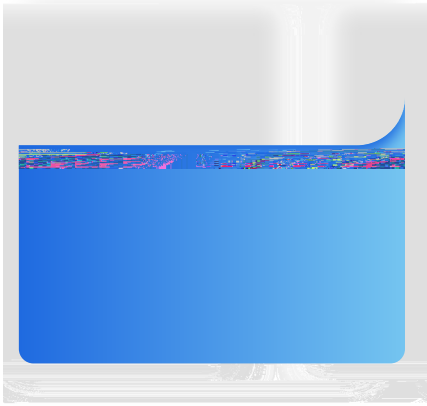

“*” 表示附加功能：

" "	AUX 12V (:H)	0-10V/PWM/Resistor	()	/ ()	
BHB	✓	✓	✓		
BHD	✓	✓		✓	

	120Vac		277Vac	
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			2.4A	120Vac
			288W	120Vac
(120Vac)			60A	
(220Vac)			100A	
(277Vac)			130A	
			0.5W	220Vac/50Hz
	0.95	0.97		220Vac/50Hz
	0.90			120-277Vac/50Hz 150-240W
		7%	12%	220Vac/50Hz
			20%	120-277Vac/50Hz 150-240W

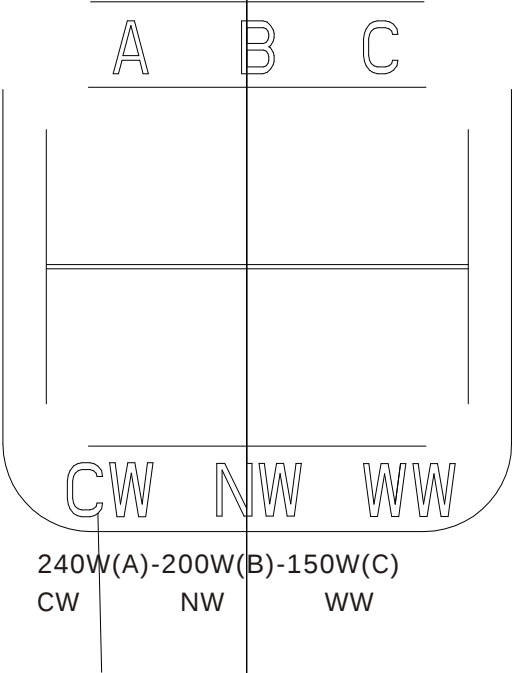


SS-240CNL-E260*LED

	180V		260V	
	200V		260V	Po=Vo*Io=240W
	0.92A		1.2A	1.2A 200V,0.92A 260V

			310V	
	90.0%	92.0%		260V/0.92A
	93.5%	95.5%		260V/0.92A
	94.0%	96.0%		260V/0.92A
			+5%	
PK-AV		5%	10%	
			10%	
			1.0S	120Vac
			0.5S	220Vac

SS-240CNL-E260*

LED



MTBF	198,000 hours	220Vac,	25 (MIL-HDBK-217F)
	IP65		
	90		
	5		
	850g		
	Φ128mm*62.5mm	x	



Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

安规与电磁兼容标准：

UL/cUL	UL8750	
TUV	EN 61347-2-13:2014/A1:2017 EN61347-1:2015 EN62493:2015 LC	

RCM	AS/NZS61347.2.13	
CCC	GB 19510.14-2009	
CE	EN 61347-2-13:2014+A1:2020	✓

EMI/EMS		
	EN 61000-6-2:2019+A1:2021	
	EN 61000-6-3:2019+A1:2021	Class C
	IEC/EN 61000-4-5	B(6kV, 6kV)
	IEC/EN 61000-4-12;ANSI/C82.77-5-2017	B(6kV, 6kV)
	IEC/EN 61000-4-12;ANSI/C82.77-5-2017	B(6kV, 6kV)

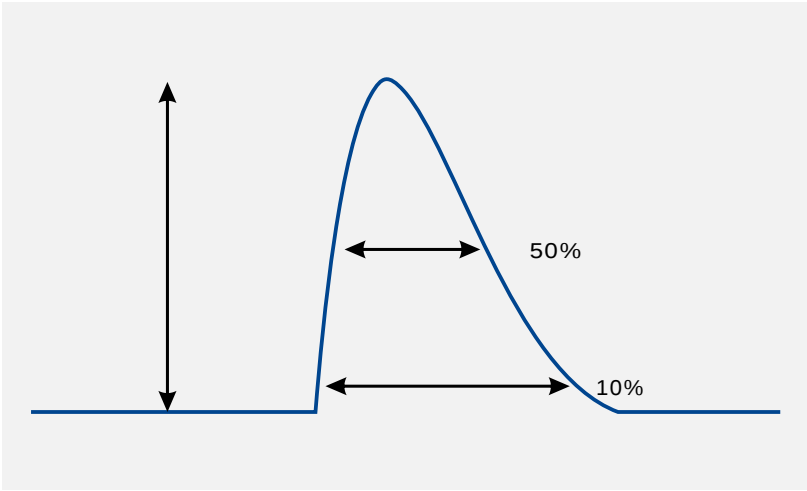

		T(@10%)	T(@50%)
120Vac	60A	520uS	
220Vac	100A		200uS
277Vac	130A	520uS	


SS-240

260*


LED



Vs. (Vin=220Vac)

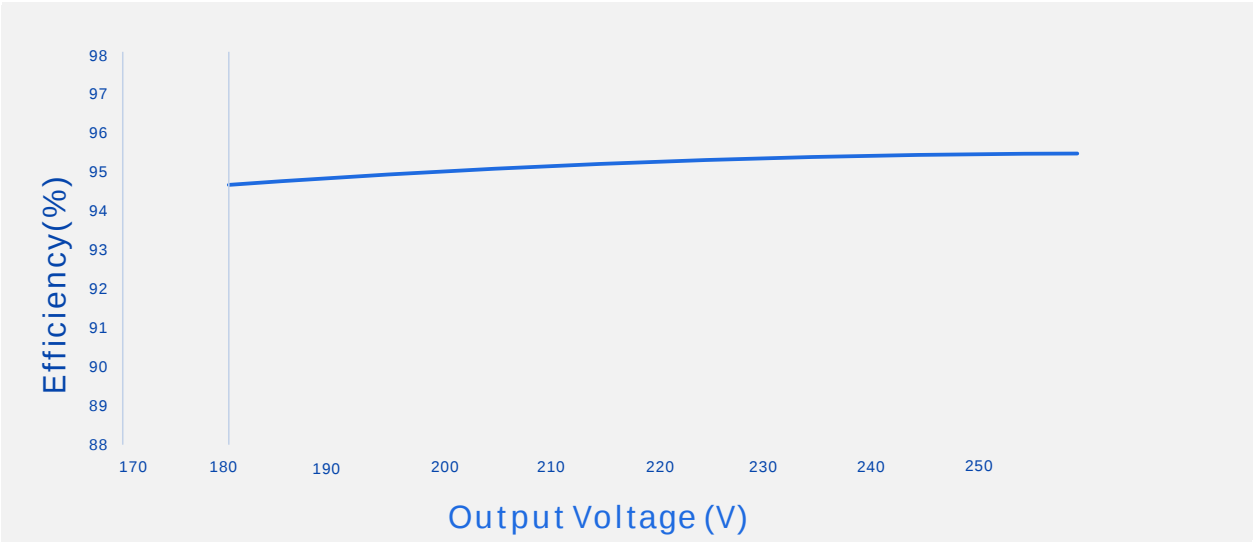


Vs. (Vin=277Vac)



Vs.

Vs.

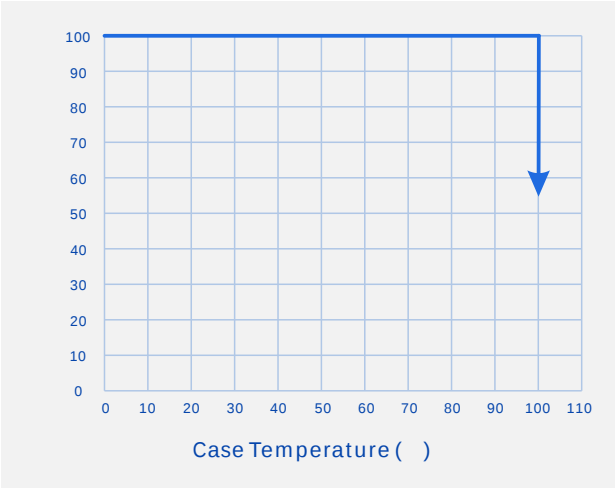

Vs.

Vs.

Dim Cable Hole AC Z DC Y Tc 4-B W D ADJ./IO		



1		,		,	704
2					
3			5mm		
4		LED+	LED-	1.8mm	
5					
6	LED				
7	LED				
8			LED		

-		mm	×	×	=577 × 385 × 162;
-		15			
-	0.85kg		14.5kg		
-					

--	--	--	--	--	--

	GB 3873	83
1		

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------

V0

1

V0

1

2022/8/1

12 21 1

V01

2022/8/2

12 21 1