






“*”





SS-240SN-E260*



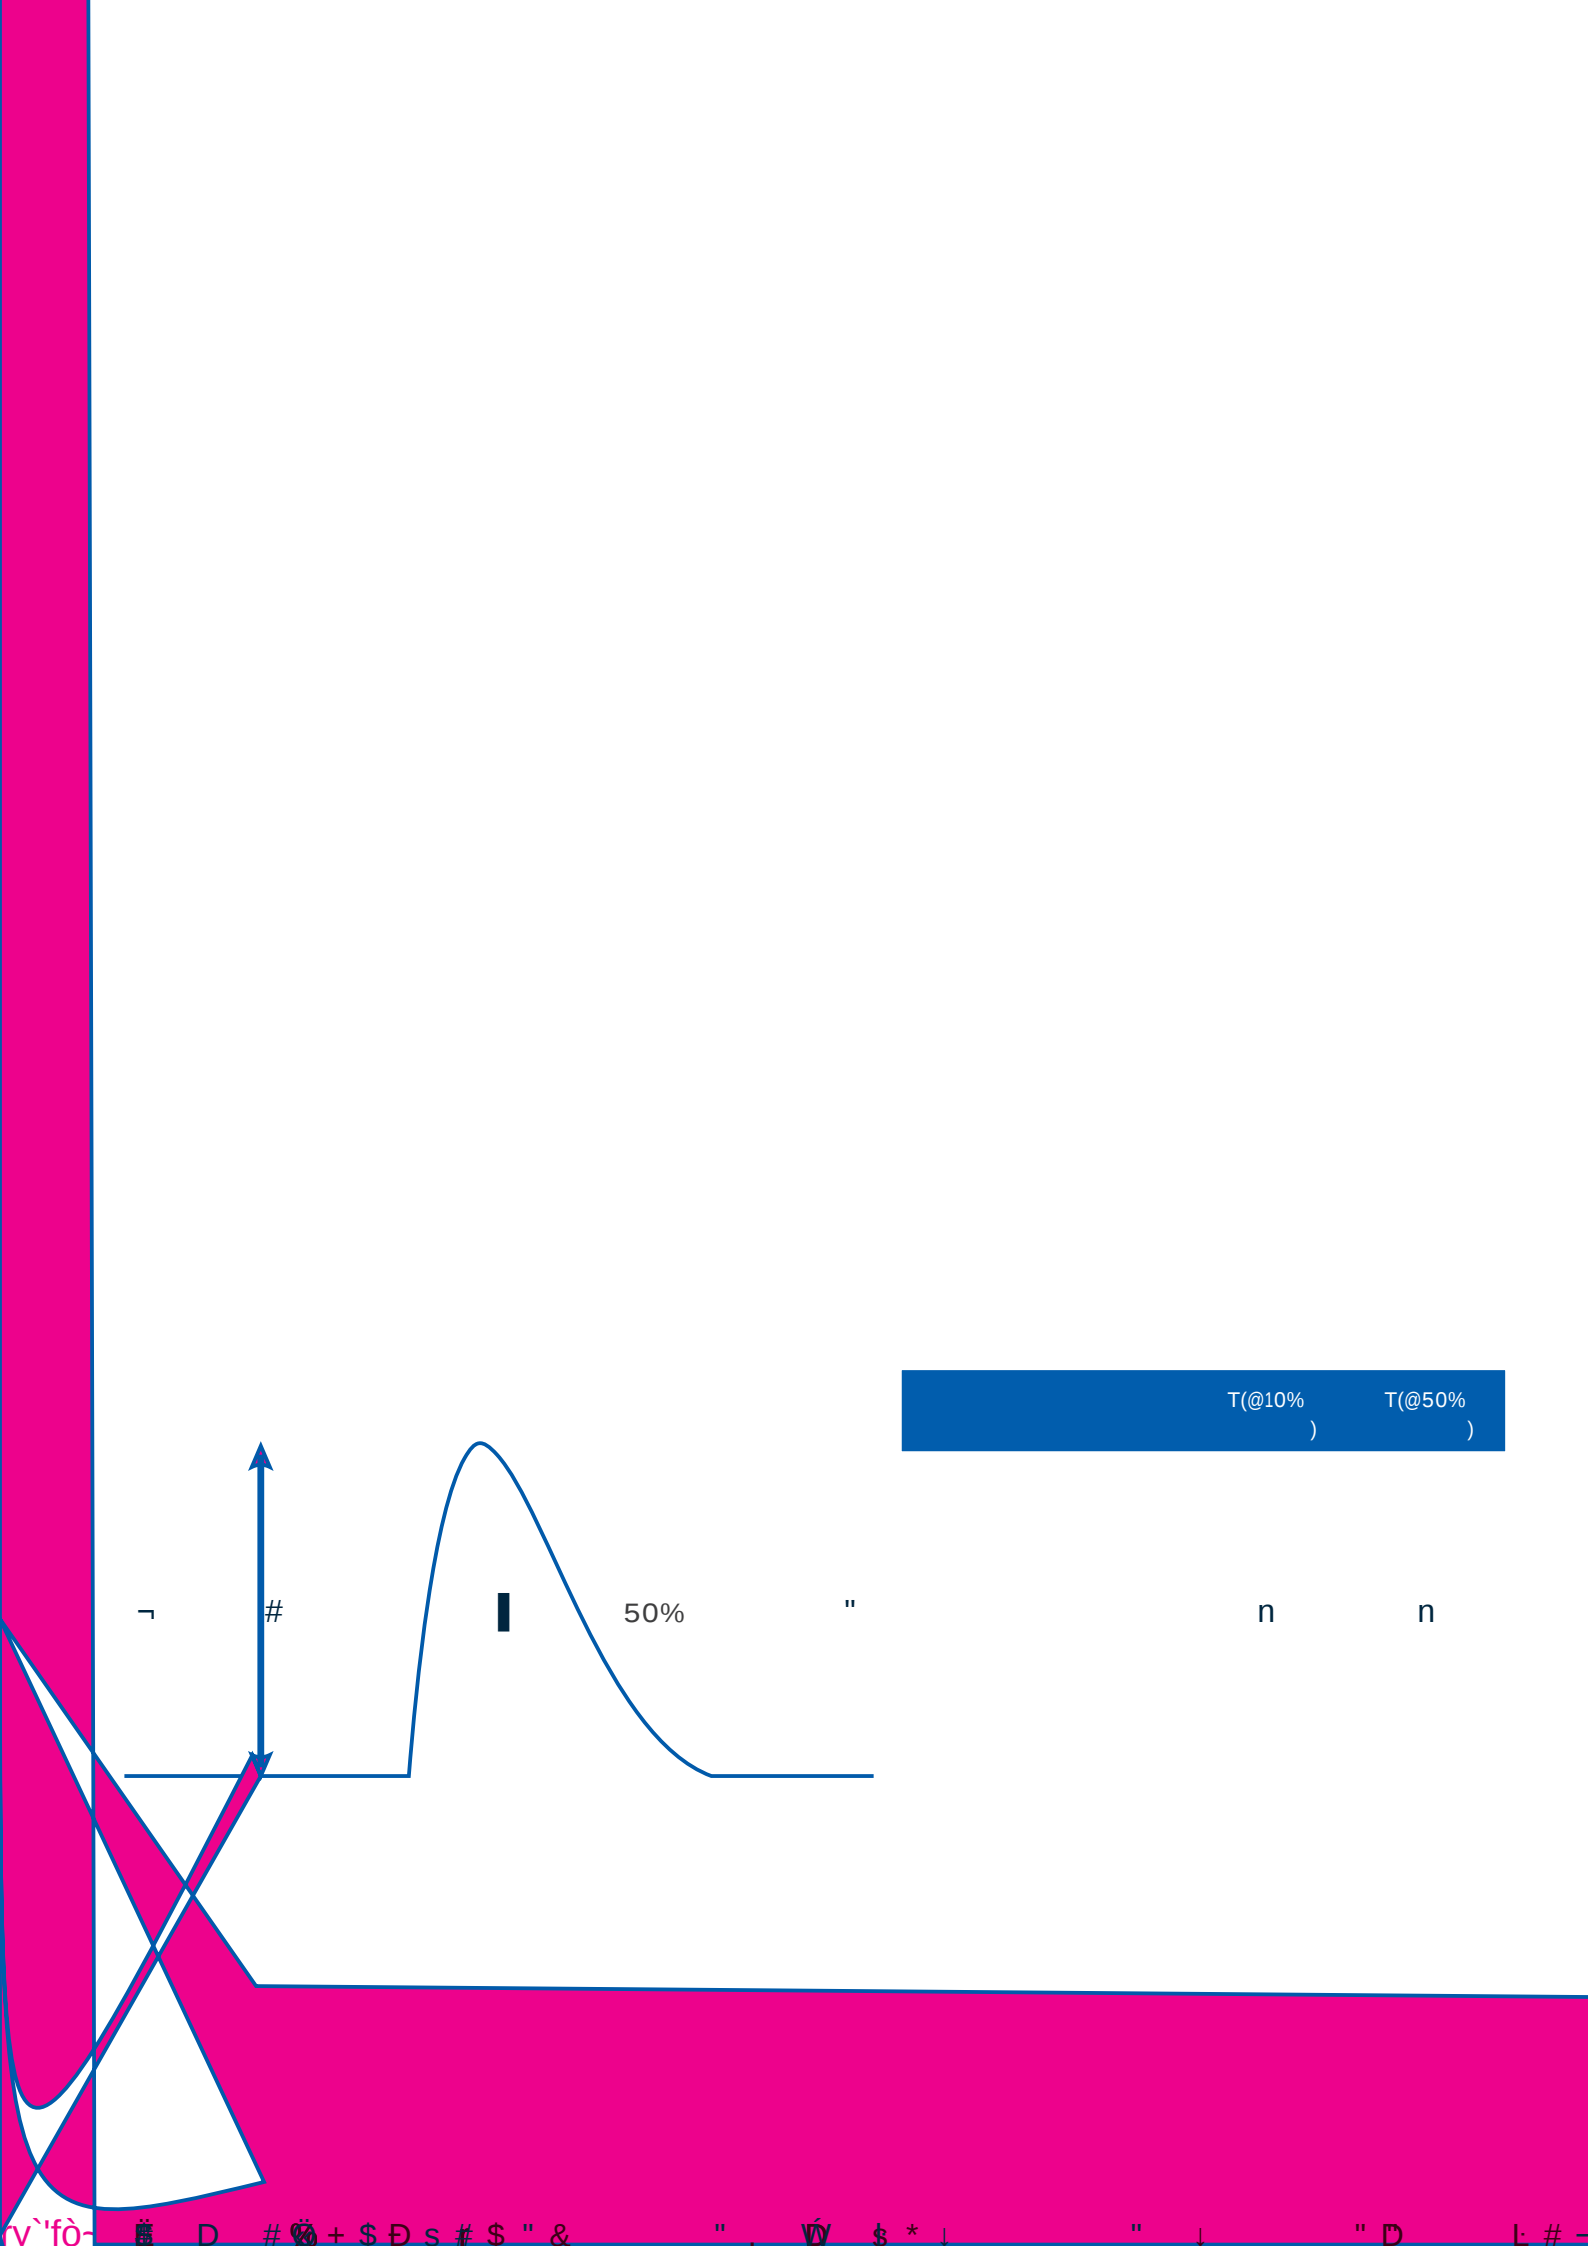

T(@10%)
T(@50%)

50% n

ry`fò- 魔 D # 0 + \$ D s # \$ " & " . W \$ * ↓ " ↓ " D I: # -

Vs. (/AOC)

----- Dimming Window ——— AOC Window

Vs. (, Vs.




Vs.

----- Vin=120Vac (V1) (%)
----- V ... (BT.C đ)


Vs.

SS-240SN-E260*LED


Vs.

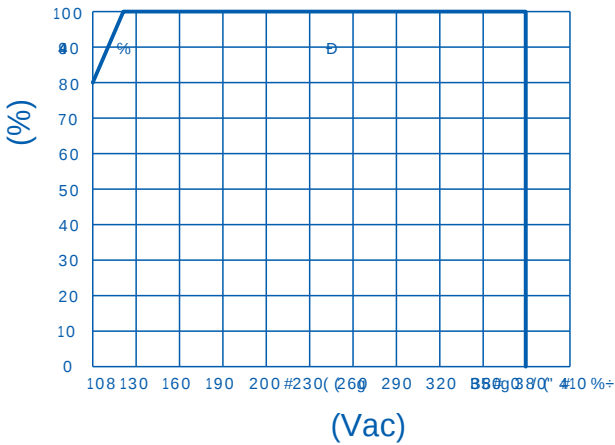

Vs.

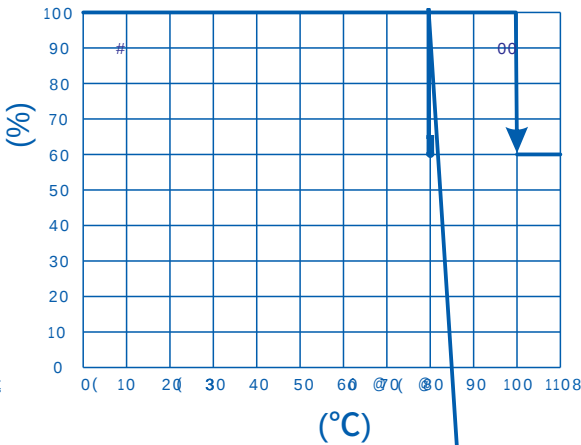


Vs.

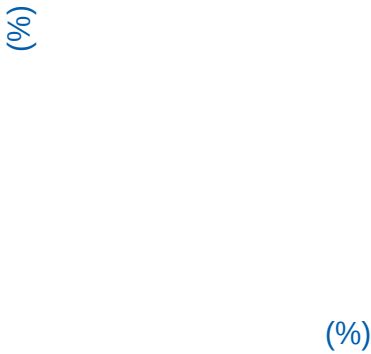

Vs.




SS-240SN-E260*LED

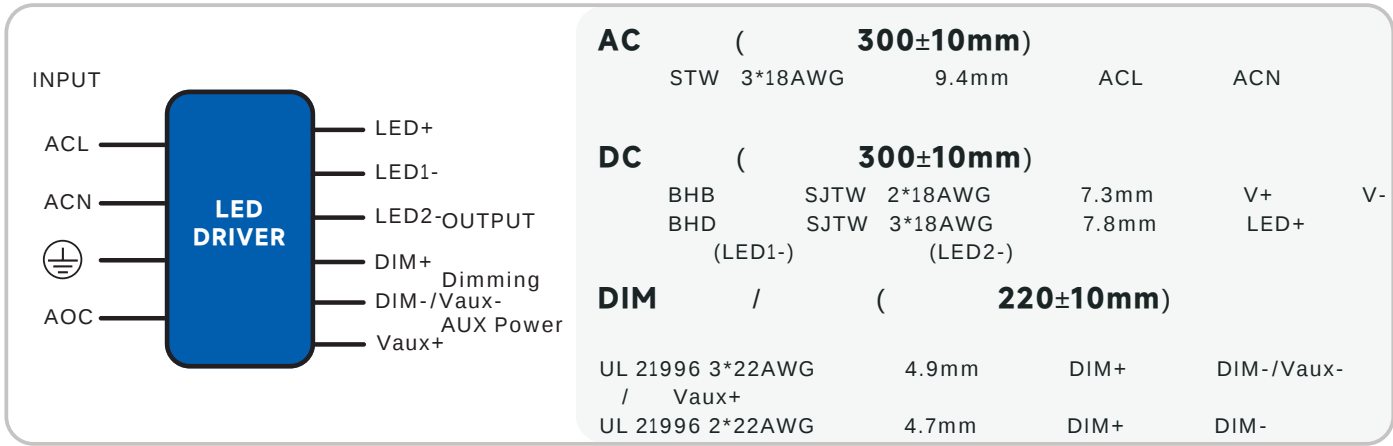

		mm(In.)
	A	13(0.51)
	4-B	Φ7.0(0.28)
	D	Φ136(5.35)
	H	62.5(2.46)
	Z	M10*1.5(18mm) G1/2(18mm)
	R	M4*0.7
	W	113(4.45)
Tc	X	10(0.3 * *)
Tc	Y	33(1.3)

1 LED
2 AC DC DIM / ;
43±5mm 10±2mm;

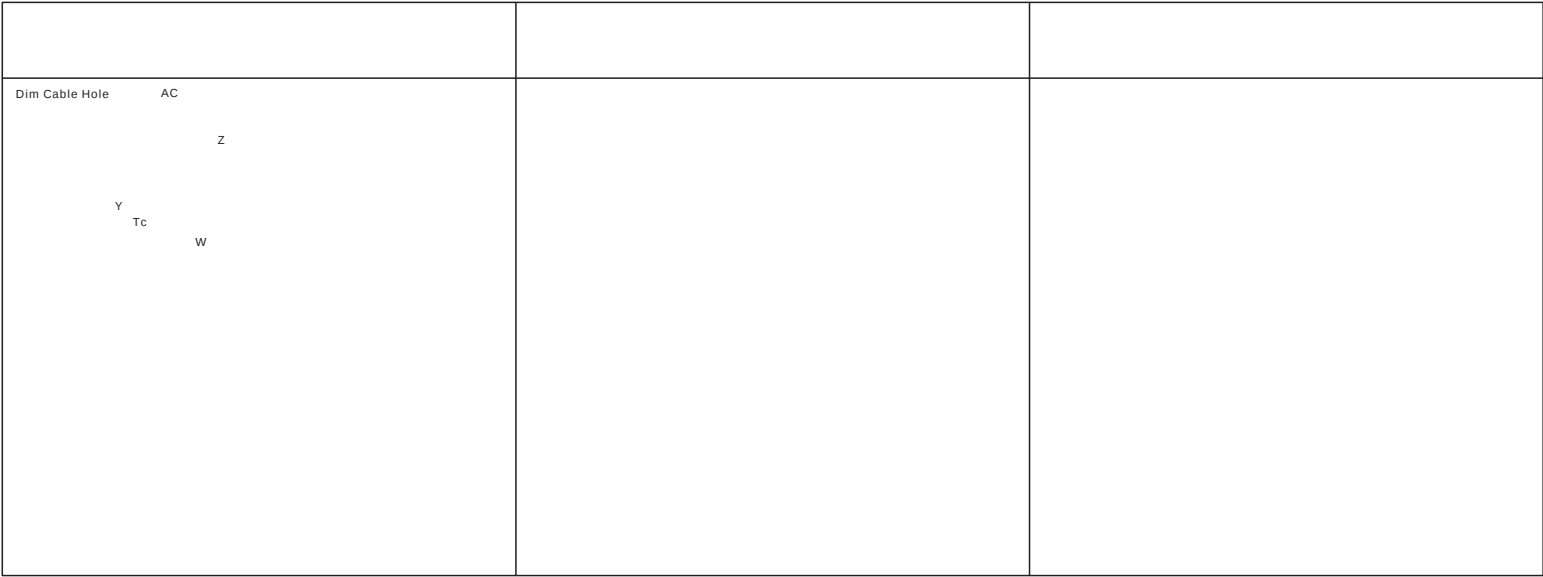



V00		2024/09/08	
V01		2023/07/13	
V02		2023/08/22	
V03		2023/11/17	
V04		2025/04/07	