



: SS-680M-XXX
: 680W LED
: V02
: 2025-12-16

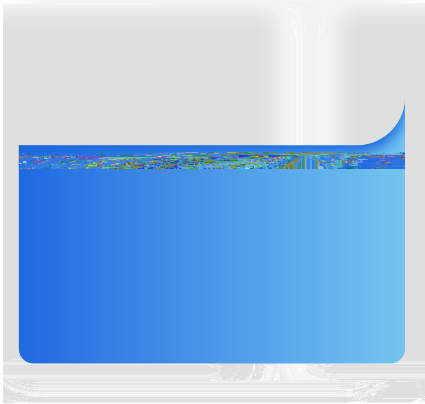

LED

LS


名称	DALI (:D)	AUX 12V (:H)	NTC (:N)	Timing	0-10V/PWM Dim /Resistor (:B)	
BH		✓		✓	✓	

1	2	3	4	5
---	---	---	---	---

200Vac
 冷机启动
 347Vac/60Hz ,
 347Vac/60Hz
 220-240Vac 80%-100%
 347Vac/60Hz

--	--	--


--	--



--	--	--



Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	



--	--

50%	Vin		(@10%)	(@50%)
	220Vac	25A	3.9mS	
	347Vac	28A	4.1mS	
	480Vac	32A		

SS-880M


LED

Vs.


AOOC

180


Vs. (Vin=347Vac)

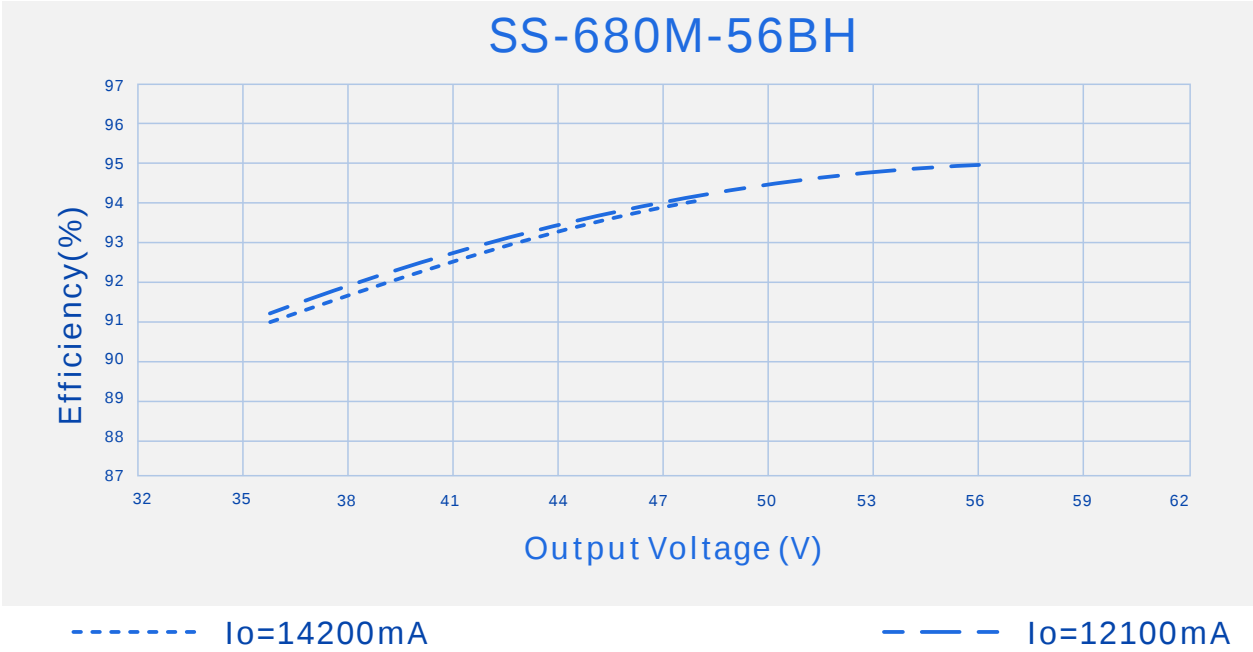


Vs. (Vin=480Vac)

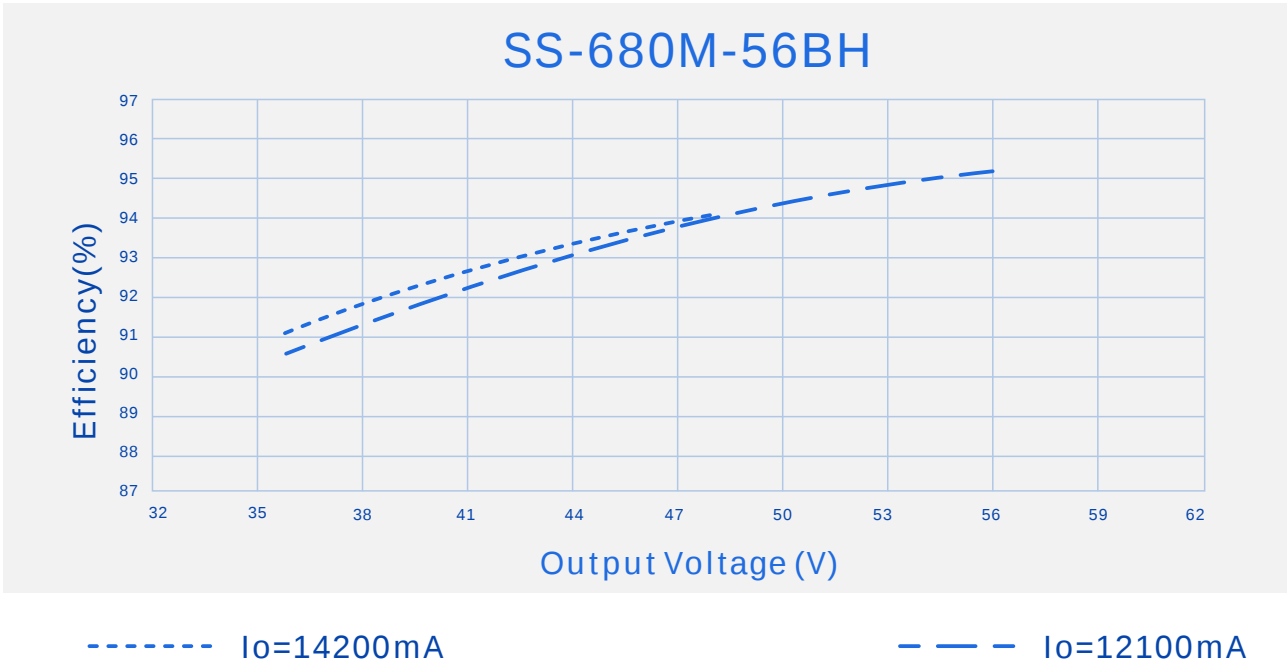

Vs.

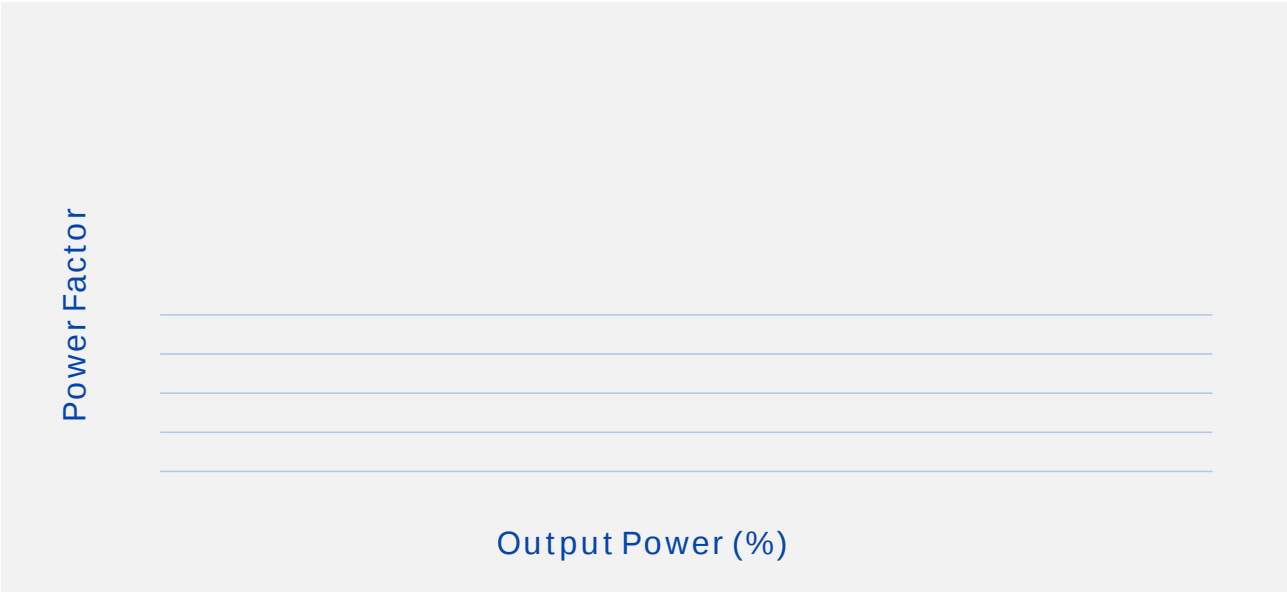

Vs.




- 1

2

3
- m

PC

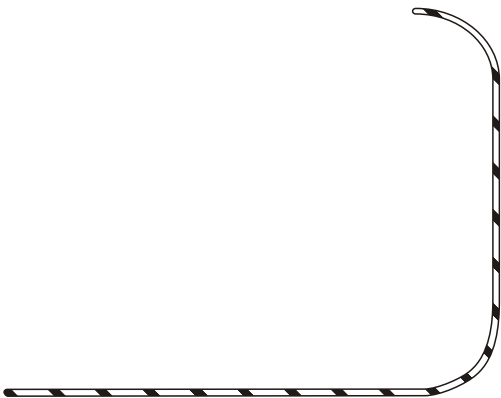


LED

LED

	(0-10V)	10V()	
	(10-0V)	0V()	
	(0-10V)	0V()	(
			(

“10V(输出电流)” / “调光电压默认0V（吸入电流）”，需要根据最终用户使用的调光器来设置

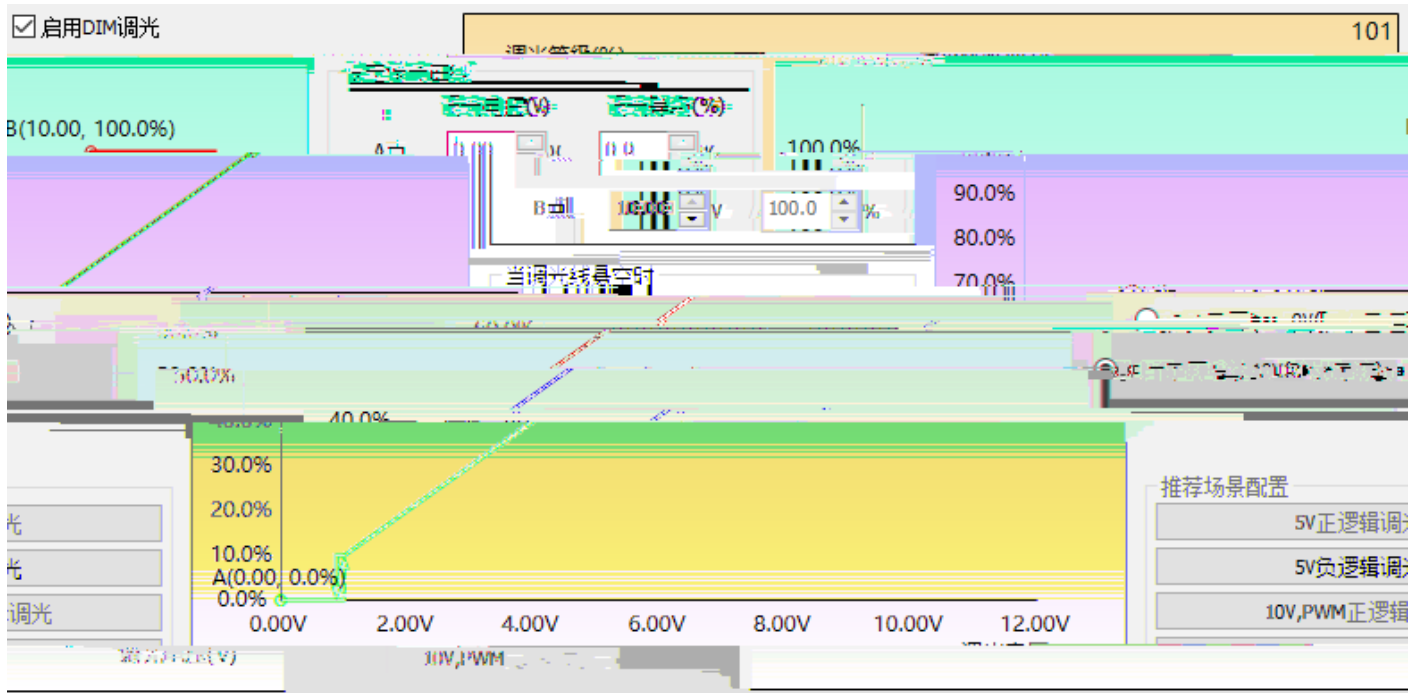

SS-680M

LED

V-

AC	(	450 ± 10 mm)		
STW	3*18AWG	9.4 mm	L	N
DC	(	250 ± 10 mm)		
SJTW	2*14AWG	9.0 mm	V+	V-
SJOW	2*14AWG	8.8 mm	V+	V-
DIM	/	/	(	220 ± 10 mm)
21996	4*22AWG	5.6 mm	DIM+	DIM- / Vaux+
/	Vaux-			



