



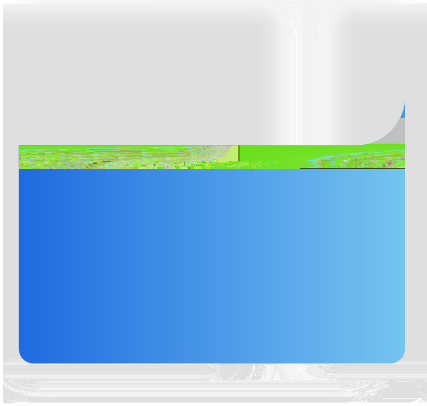



				220Vac

0 *


ě				220Vac/50Hz
				120-277Vac/50Hz 70-100%
				220Vac/50Hz
				120-277Vac/50Hz 70-100%

--	--	--	--	--


	180V			
	200V			
	0.308A			
AOC	0.28A			

AUX		10.8V	12V	13.8V	
				200mA	
0-10V		0V		12V	DIM+ 100uA
		10%Iomax		100%Ioset	DIM+/DIM-
		0V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 100uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	DIM+ 100uA
		10%Iomax		100%Ioset	
		0.7V	0.8V	0.95V	
		0.95V	1.1V	1.2V	

	≤ 85	≥ 50,000 hours
MTBF		198,000 hours
		IP65
		90
		5
		705g
		Φ128mm*62.5mm



Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

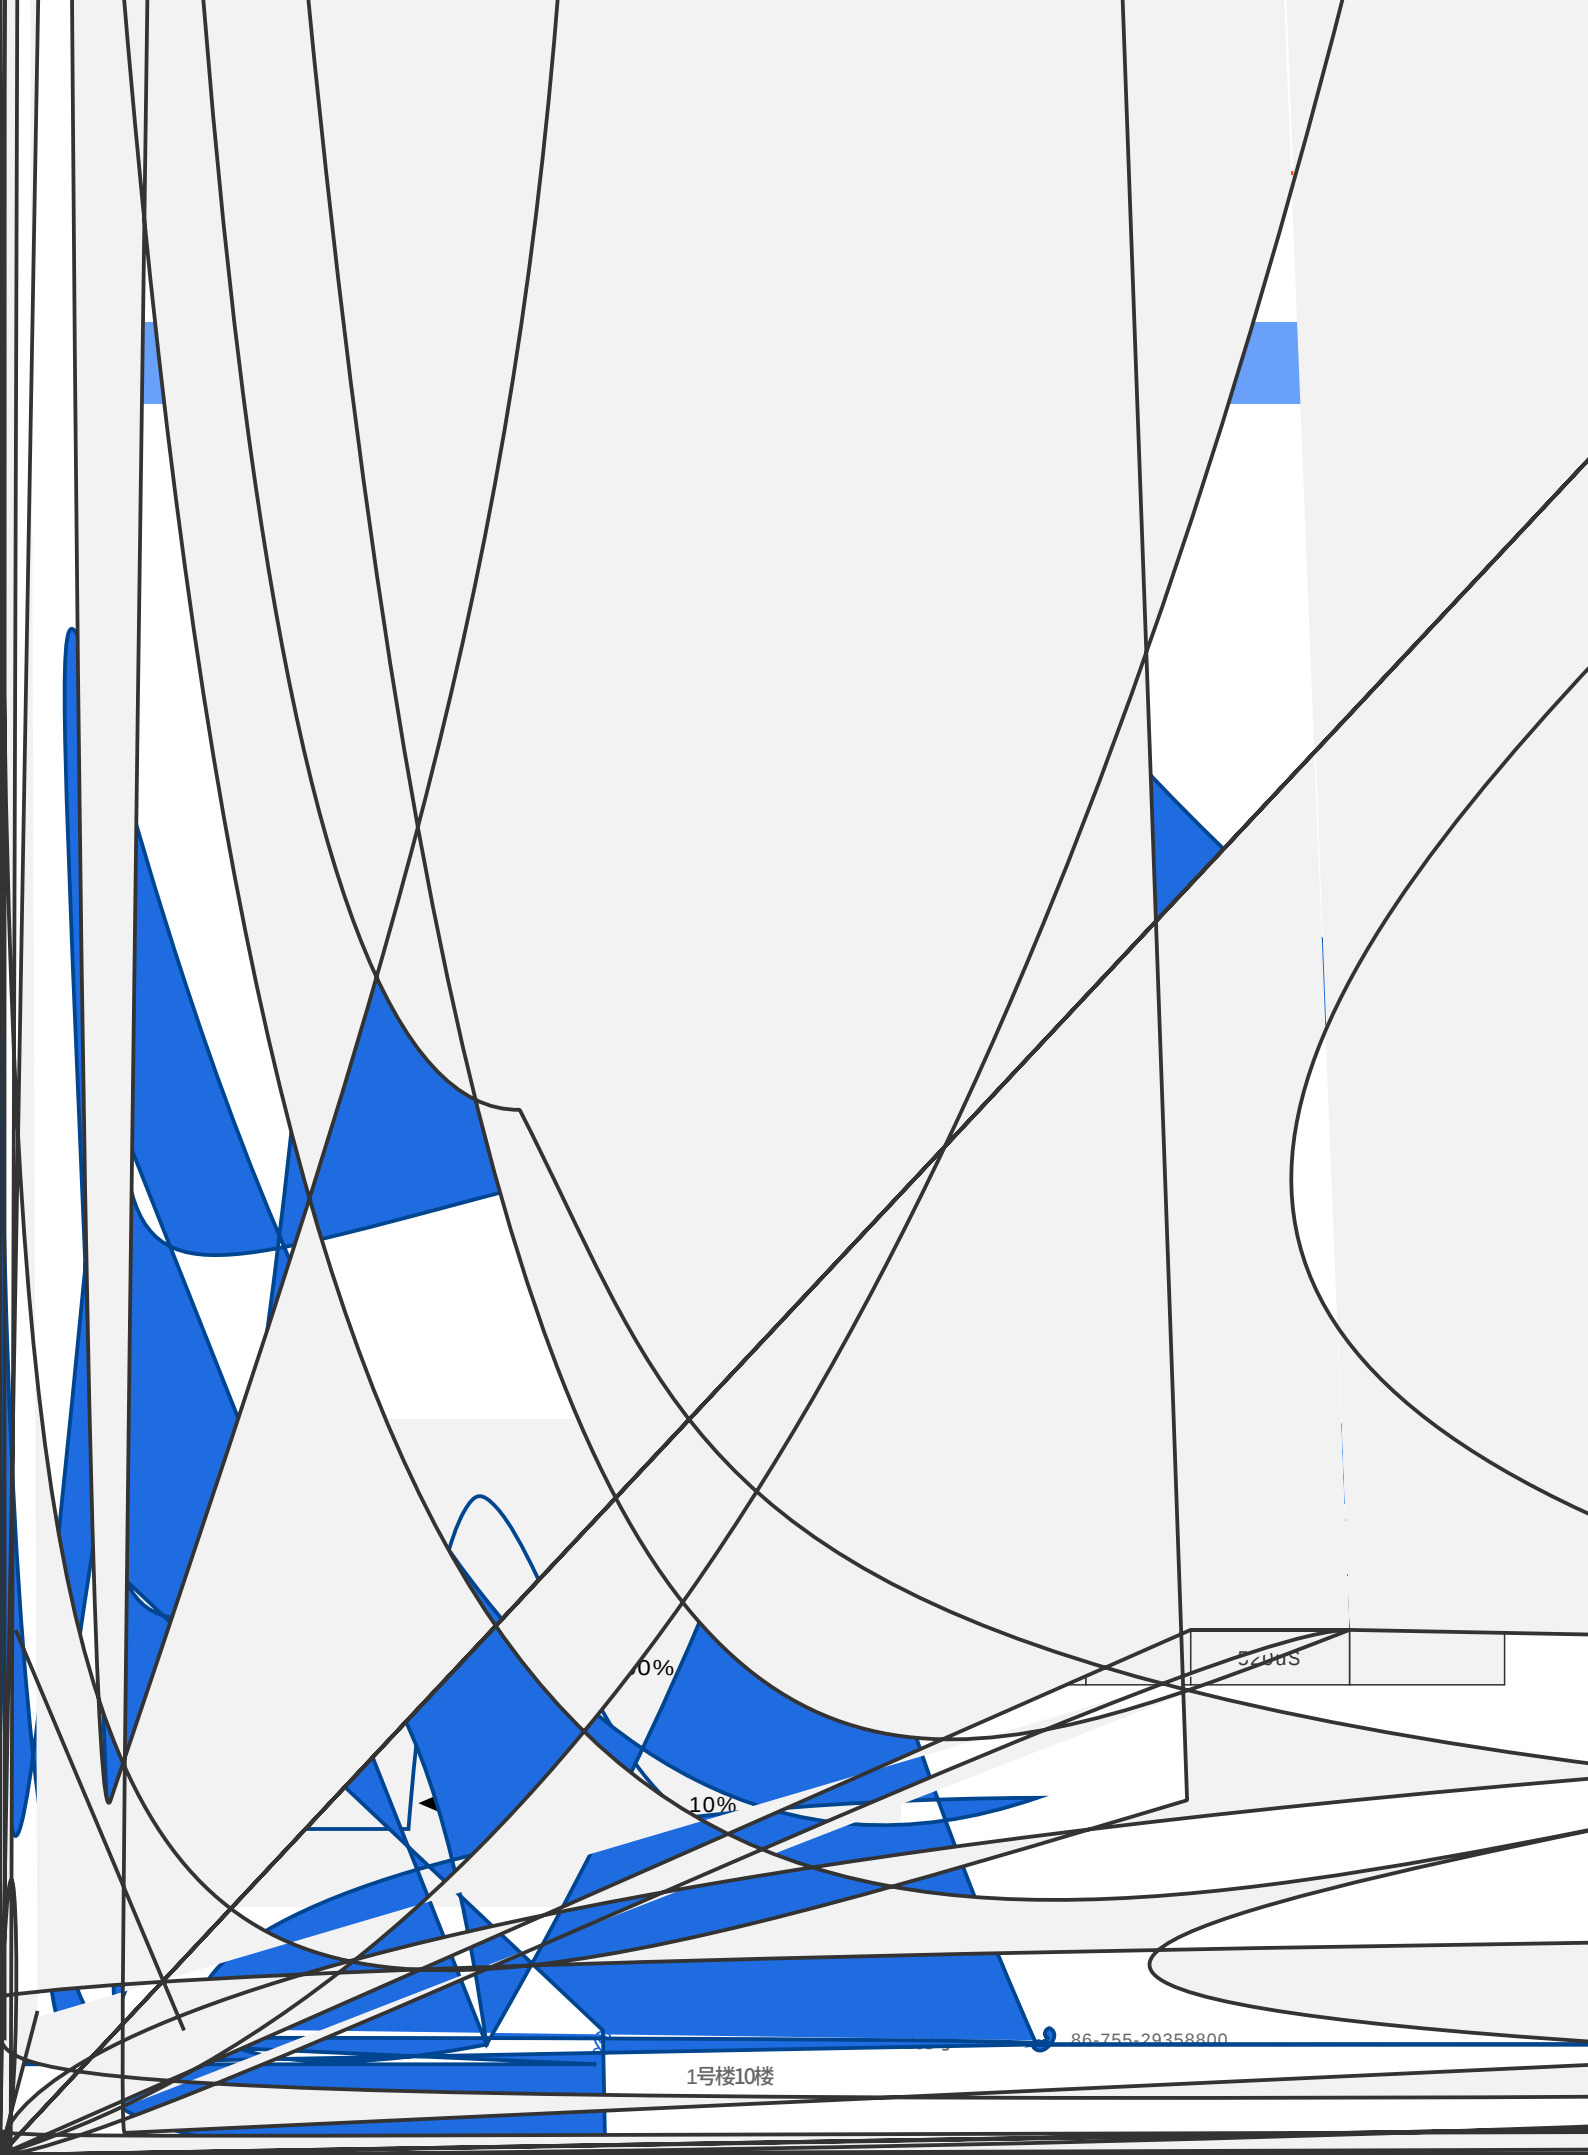

0%

5.20mS

10%

86-755-29358800

1号楼10楼

Vs. (/AOC)

Vs. (Vin=120Vac)



S...L-E(64) LED



V+ OUTPUT
V-
DIM+/DA Dimming/DALI
DIM-/DA/Vaux-
Vaux+ AUX Power

AC	(	300 ± 10 mm)		
	SJOW	3*17AWG	:8.0mm	ACL ACN ⚡
DC	(	300 ± 10 mm)		
	SJOW	2*17AWG	7.7mm	V+ V-
DIM	/	(	220 ± 10 mm)	
	/	/		
UL 21996	3*22AWG	4.9mm	DIM+	DIM-/Vaux-
	/	Vaux+		
UL 21996	2*22AWG	4.7mm	DIM+	DIM-

7
ğ ,

R

1
2 AC DC LED
0 43 ± 5mm DIM / / ;
10 ± 2mm;



1		,		,	704
2					
3			5mm		
4	LED+	LED-		1.8mm	
5					
6	LED				
7	LED				
8			LED		

-		mm	×	×	=577 × 385 × 162;
-		15			
-	0.705kg			12.5kg	
-					

--	--	--	--	--	--

	GB 3873	83
1		

RoHS		
RoHS	(2011/65/EU)	2015/863/EU



V00		2023/01/04	