



: SS-150CNS-260*

: 150W LED

: V03


: 2026-01-04



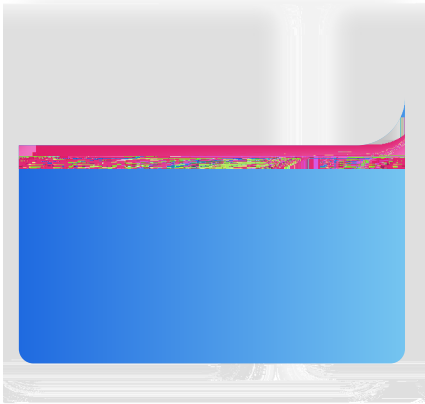

--	--	--	--	--


	277Vac		480Vac	
	249Vac		528Vac	
	47Hz		63Hz	
			0.78A	277Vac






			310V	



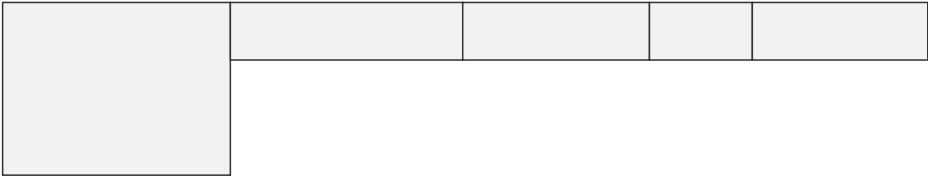




Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	



0 *

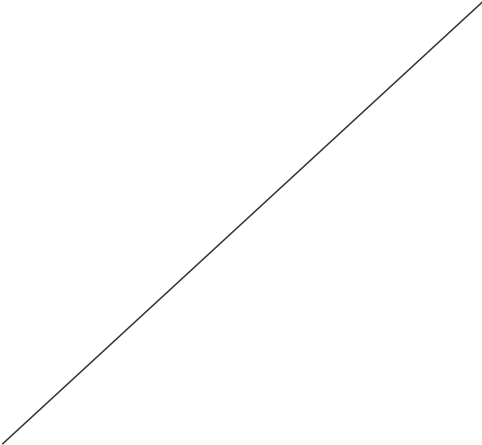


SS-150CNS-260*

LED


:

Vs. /AOC




----- Dimming Window ————— AOC Window

Vs. (Vin=277Vac)

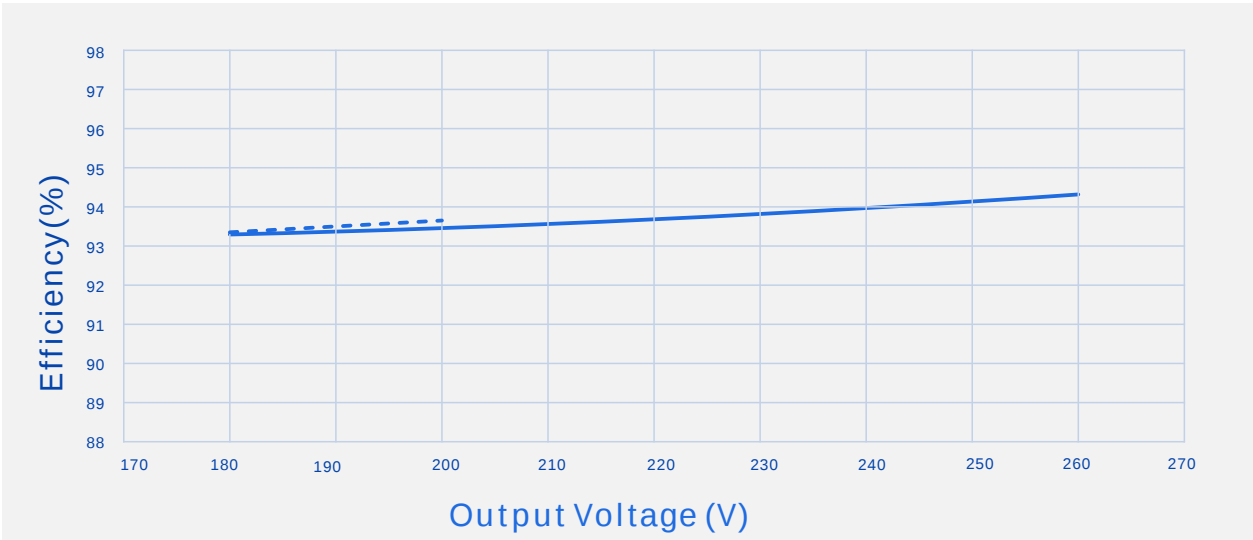


----- Io=750mA ————— Io=570mA

Vs. (Vin=347Vac)

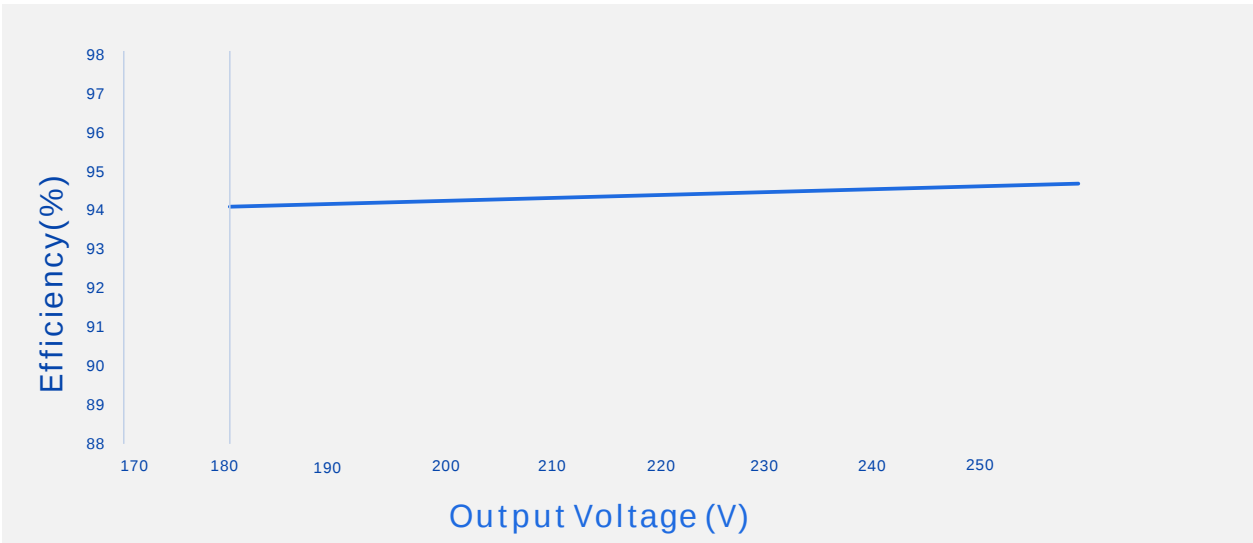

Vs. (Vin=480Vac)

Vs.

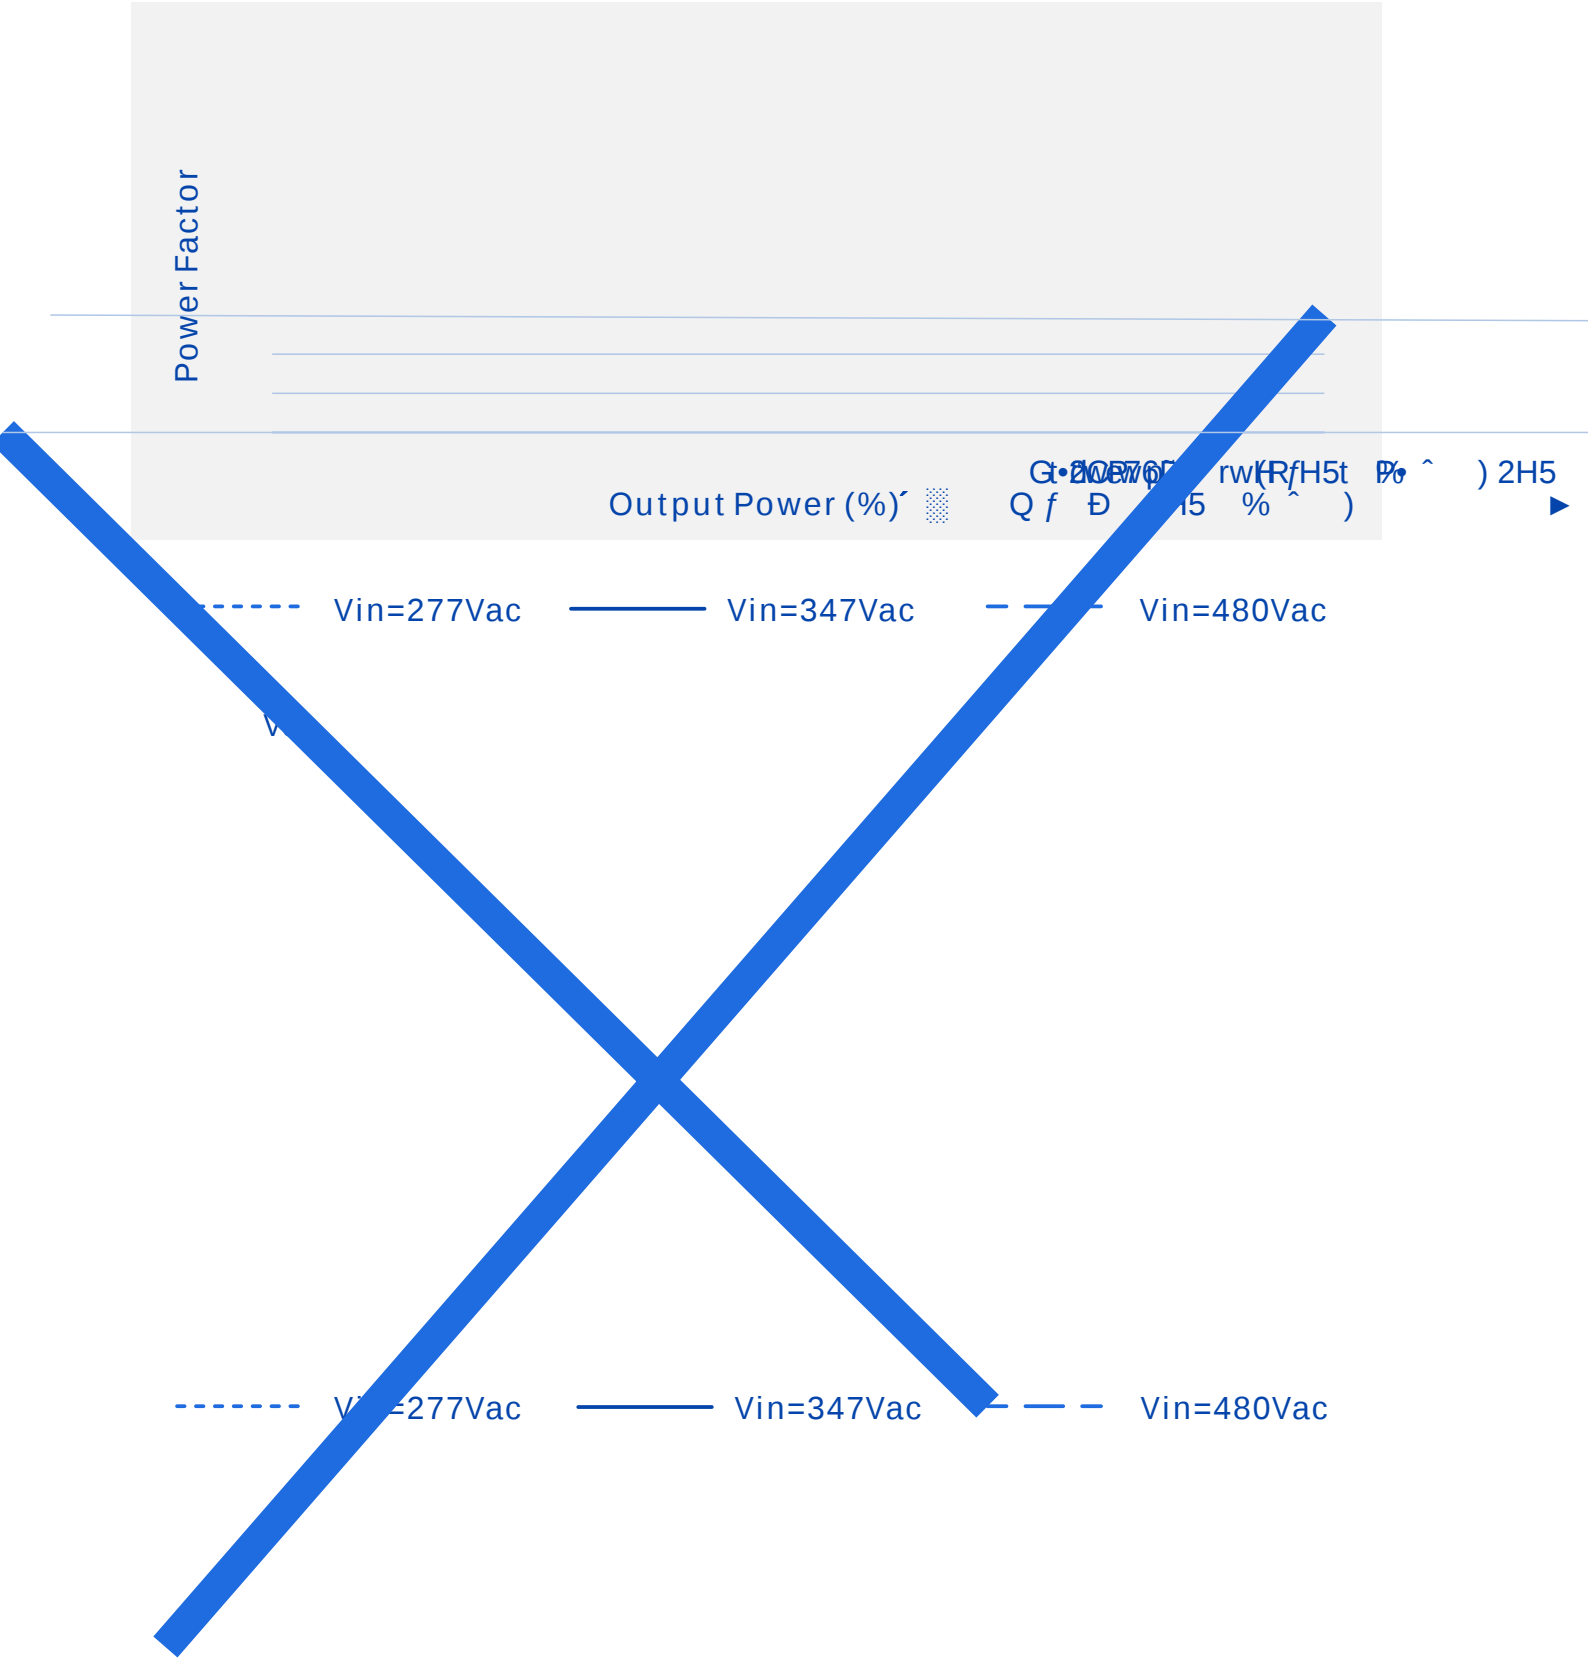

Vs.

Vs.

Vs.

Vs.

SS-150CNS-260*

LED



		mm(In.)
--	--	---------

1

2

AC

DC

43±5mm

LED

DIM

/

10±2mm;

/

:


;

Dim Cable Hole AC Z DC Y Tc 4-B W D ADJ./IO R Top H Bottom Holder Hole (Optional)		

SS-

LED





V00		2023/10/17	
V01		2023/12/19	
V02		2024/06/01	
V03		2026/01/04	