

Choice





: SS-120NS-260*


: 120W LED

V02

: 2026-01-04



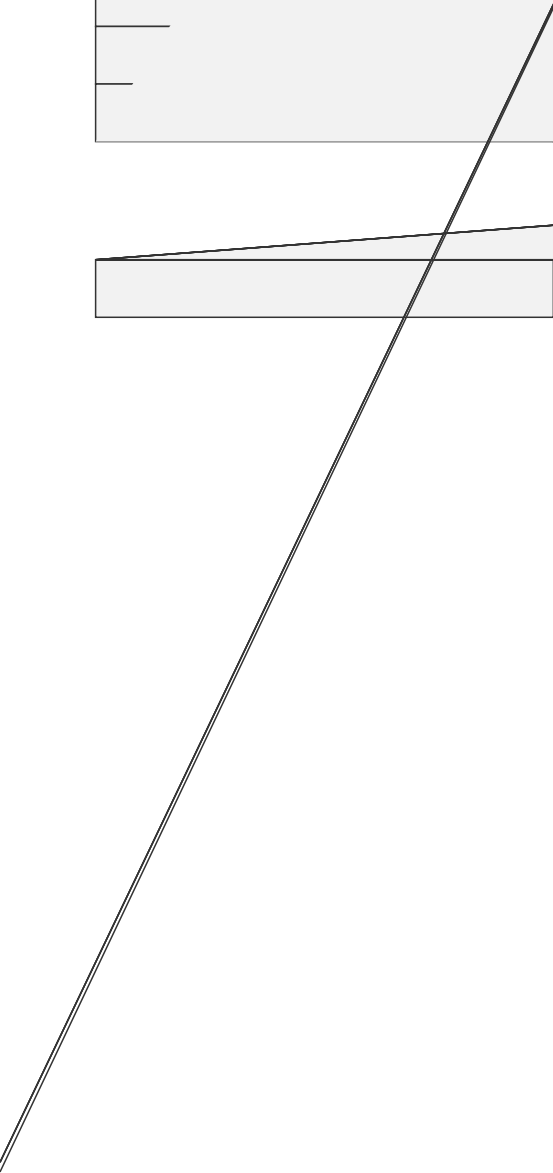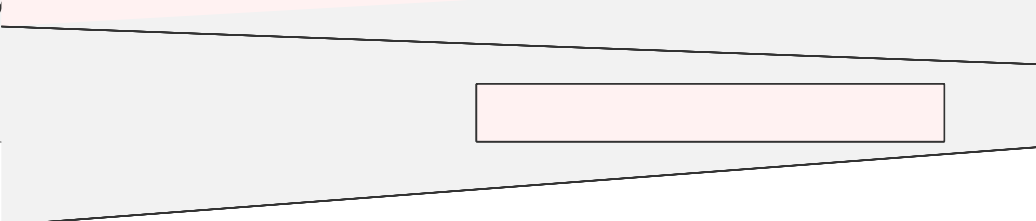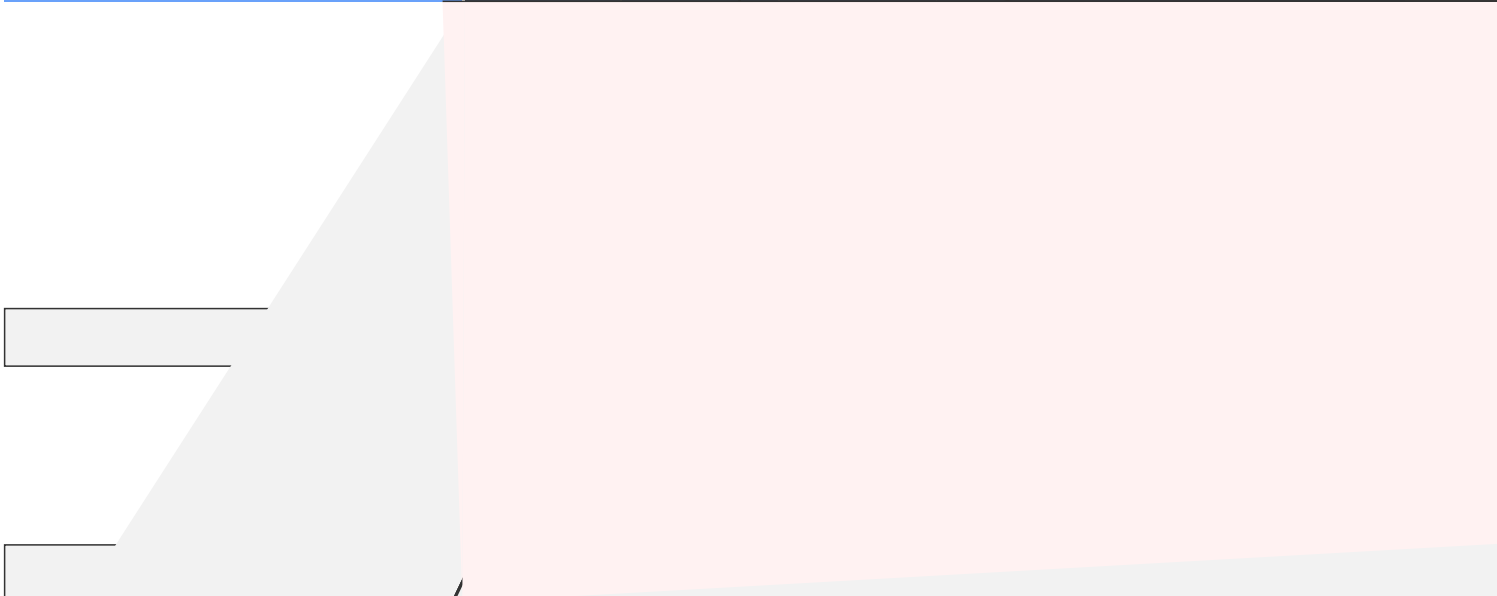






:

6g 0eB3dy"wÔe

S

	UL	
	2000Vac	
	2000Vac	
	2000Vac	
	500Vac	
	≥ 10MΩ	500Vdc
	≤ 0.1Ω	25A/1min
	≤ 0.75mA	480Vac


1. EMC
2. L/N /
- EMC
- /

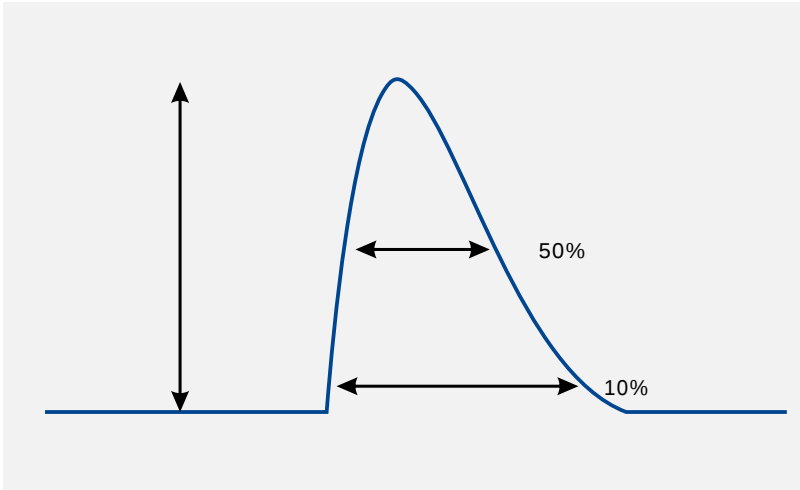

Vin		(@10%)	(@50%)
200Vac	71A	270uS	180uS
347Vac	95A	370uS	210uS
480Vac	120A	560uS	320uS

Vs.

/AOC




----- Dimming Window

————— AOC Window

Vs.

(Vin=200Vac)

Vs. (Vin=347Vac)

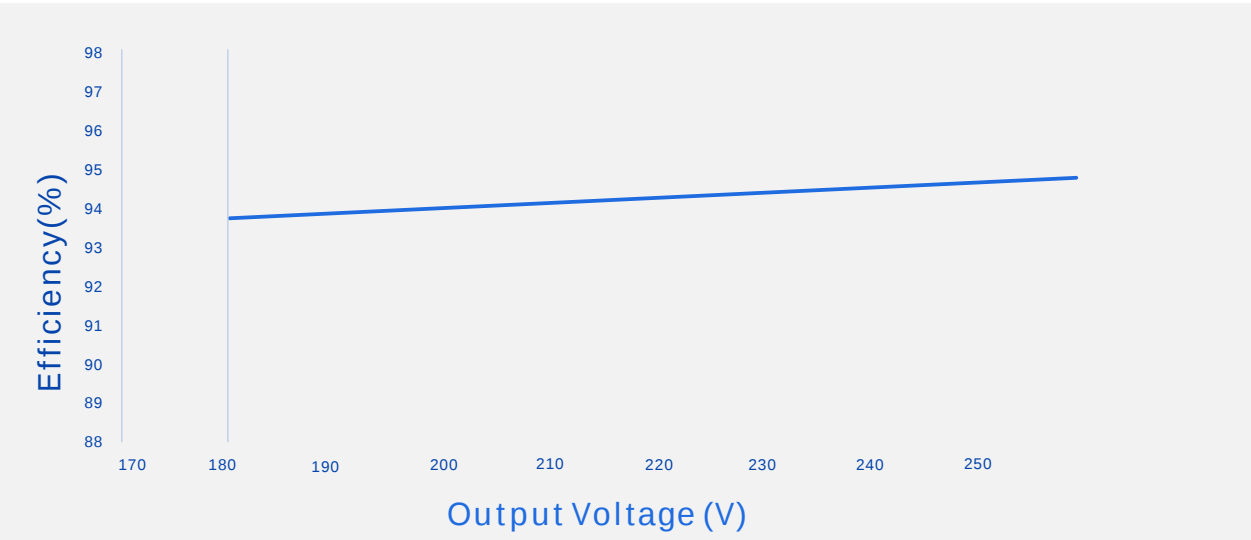

Vs. (Vin=480Vac)

