






SS-100VH-A LED

(SS-100VH-A62*)



(SS-100VH-A143*)



SS-100VH-A LED

0-10V		0V		12V	DIM+ 110uA DIM+/DIM- 0-5V
		10%Iomax		100%Ioset	
		0V		10V	
10-0V		0V		10V	DIM+ 40uA DIM+/DIM- 5-0V
PWM	PWM	9.8V		10.2V	DIM+ 110uA DIM+/DIM-
	PWM	0V		0.3V	
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	DIM+ 110uA
		10%Iomax		100%Ioset	
0-10V		0.6V	0.8V	1.0V	75%
		0.7V	0.9V	1.1V	
10-0V		9.0V	9.2V	9.4V	
		8.8V	9.0V	9.2V	



MTBF	203,000 hours	220Vac, 25 (MIL-HDBK-217F)	
	IP67		
	90		
	5	80	
	560g		
	138mm*66mm*34.75mm	x x	

SS-100VH-A

LED

--	--	--	--

EMI/EMS	/	
	EN55015:2013+A1:2015 GB/T 17743	
	EN55015:2013+A1:2015 GB/T 17743	
	IEC/EN 61000-3-2 GB/T 17625.1	Class C
	IEC/EN61000-4-5	B8kV6kV
	EN61547	B10kV6kV



SS-100VH-A LED

(SS-100VH-A62*)

Vs. (/AOC)


----- Dimming

SS-100VH-A

LED

(SS-100VH-A62*)

Vs. (Vin=220Vac)




----- Io=2850mA

- - - Io=1600mA



Vs.




SS-100VH-A


LED

Vs.

Vs.

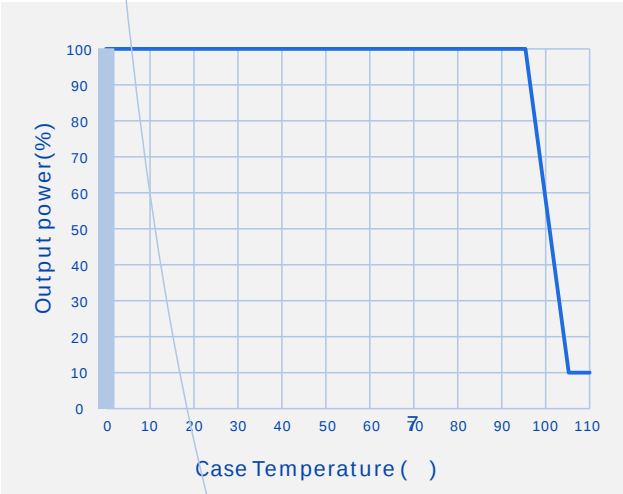


Vs.

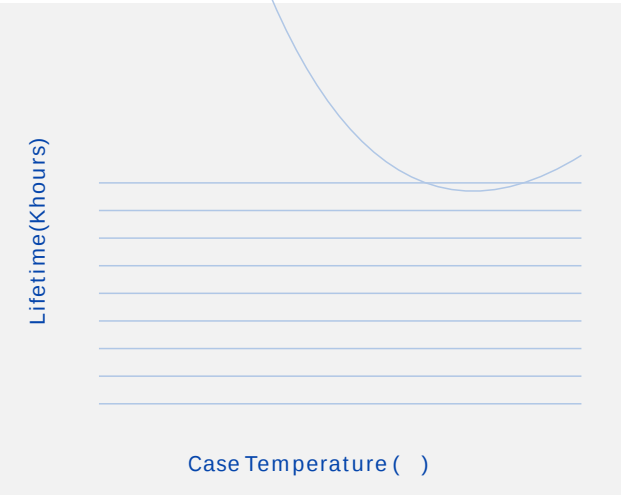

SS-100VH-A


LED

- 1
- 2
- 3
- PC

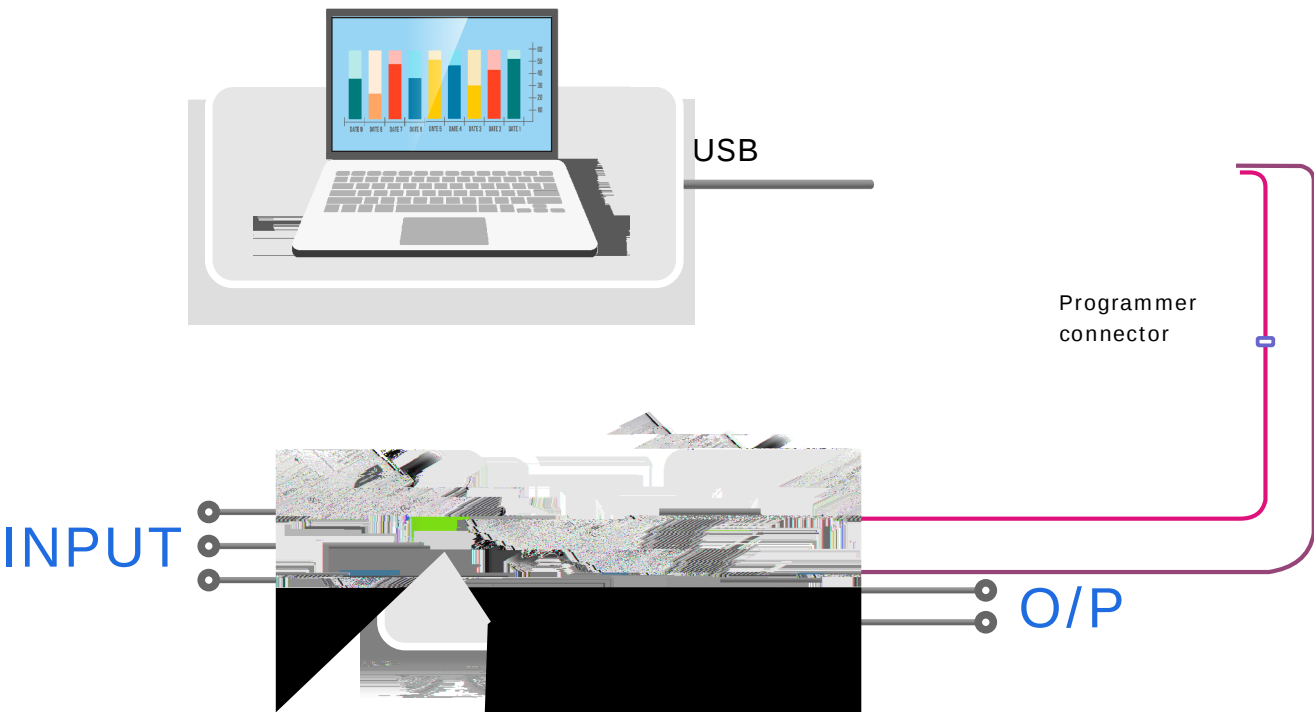

	(0-10V)	10V()	
	(10-0V)	0V()	
	(0-10V)	0V()	5la hCC
			(

“ 10V(输出电流)” / “调光电压默认0V（吸入电流）”，需要根据最终用户使用的调光器来设置

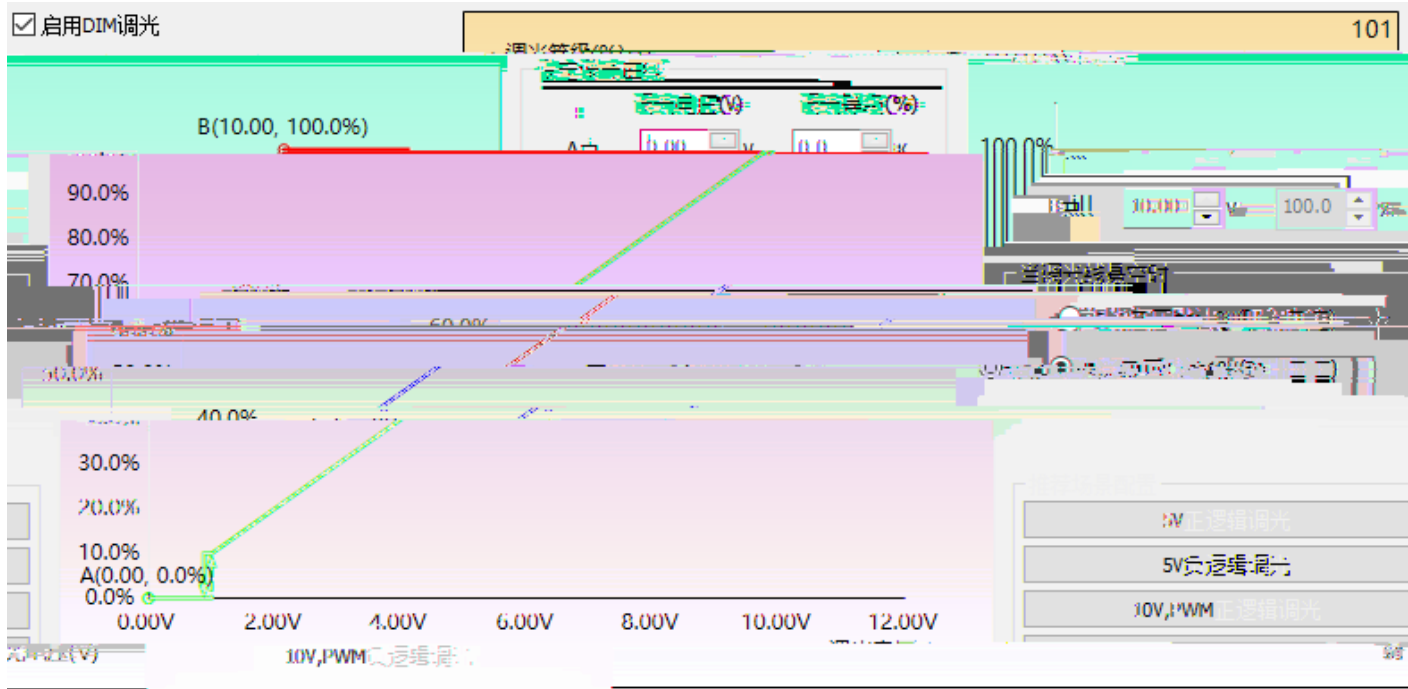





-

mm

×

×

=4

-

16

-

0.56kg

10.22kg

-

GB 3873

83

1

RoHS

RoHS

(2011/65/EU)

2015/863/EU

