





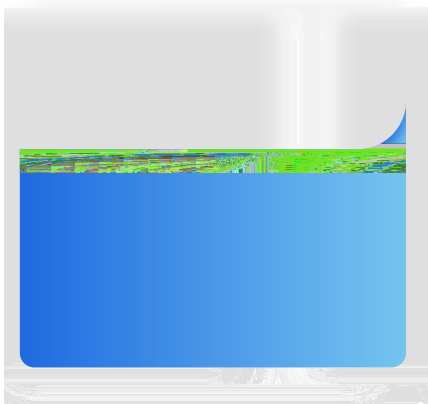

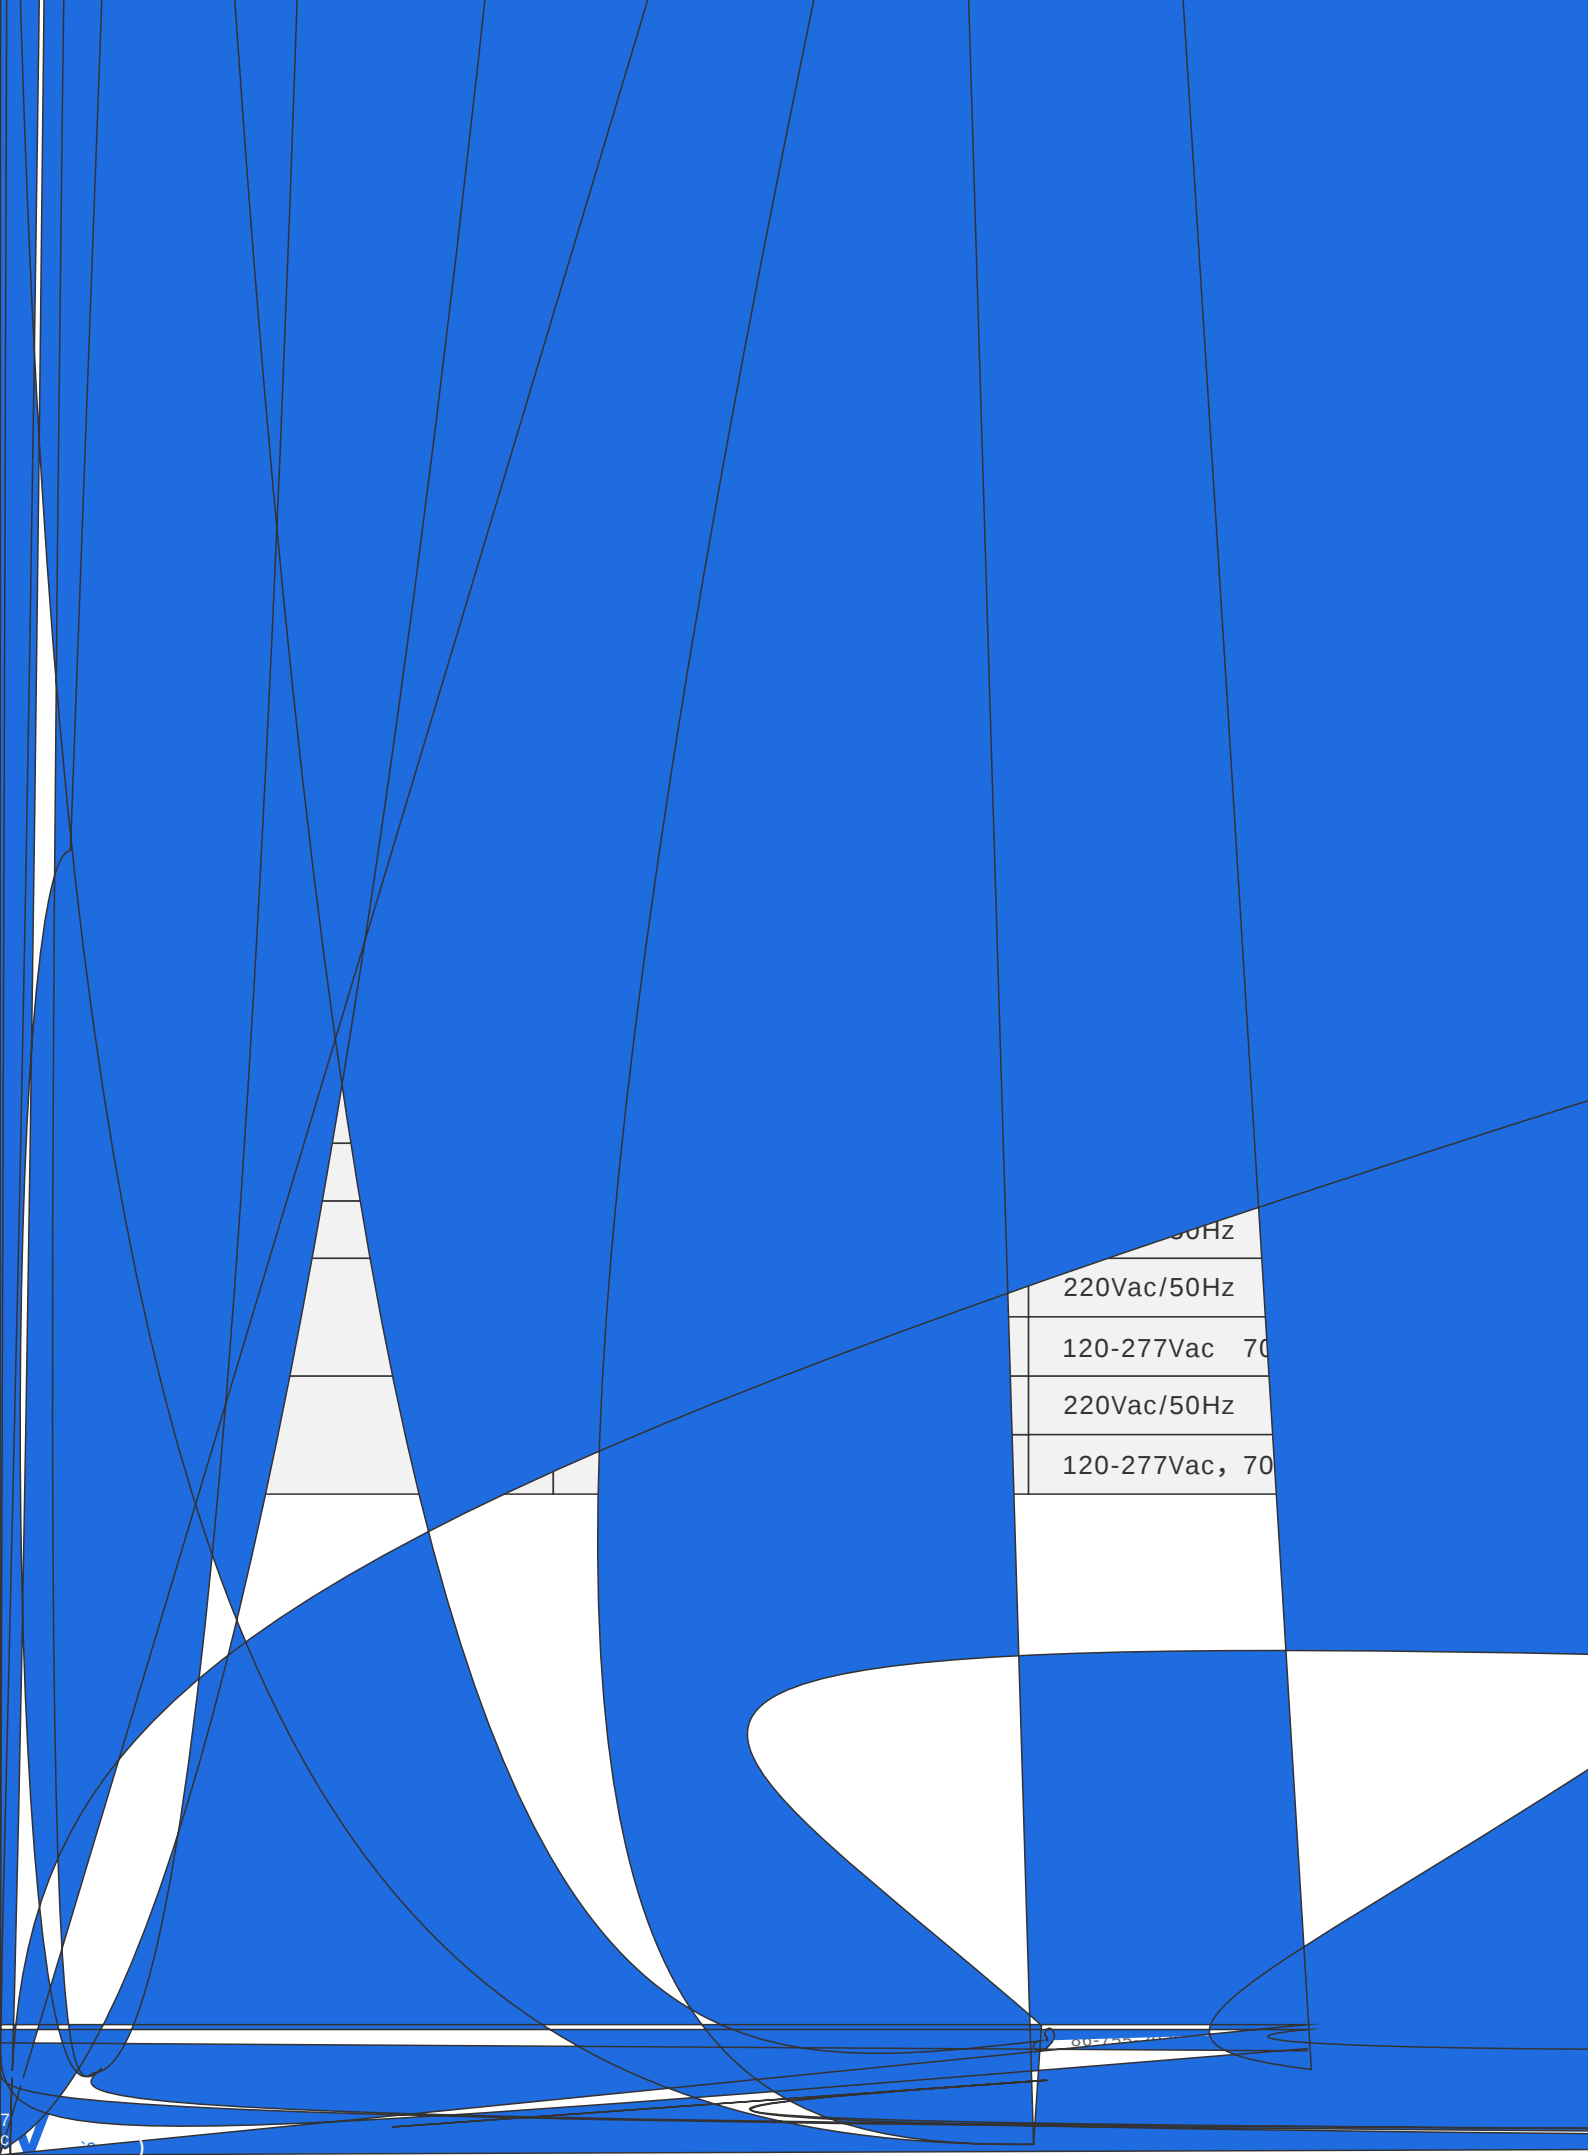

|                |
|----------------|
| 50Hz           |
| 220Vac/50Hz    |
| 120-277Vac 70  |
| 220Vac/50Hz    |
| 120-277Vac, 70 |

SS-250VH-A


LED

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|--|--|--|--|--|

|     |      |  |       |                      |
|-----|------|--|-------|----------------------|
|     | 179V |  | 358V  | 179-238V             |
|     | 238V |  | 358V  | Po=Vo*Io=250W        |
|     | 0.7A |  | 1.05A | 1.05A 238V,0.7A 358V |
| AOC | 0.1A |  | 1.05A |                      |
|     |      |  | 400V  |                      |

|         |       |       |     |           |
|---------|-------|-------|-----|-----------|
| @220Vac | 92.0% | 94.0% |     | 358V/0.7A |
| @277Vac | 92.5% | 94.5% |     | 358V/0.7A |
|         | -5%   |       | +5% |           |
| PK-AV   |       | 5%    | 10% |           |
|         |       |       | 10% |           |

|  |     |        |  |  |
|--|-----|--------|--|--|
|  |     |        |  |  |
|  | -2% |        |  |  |
|  |     | 0.03%/ |  |  |
|  | 90  | 100    |  |  |
|  |     |        |  |  |



SS-250VH-A

LED


| Tcase | -40   | 25 | +90   |  |
|-------|-------|----|-------|--|
|       | -40   | 25 | +90   |  |
|       | 10%RH |    | 90%RH |  |
|       | 5%RH  |    | 95%RH |  |
|       | -65m  |    | 4000m |  |


| E ] |  |  |  |
|-----|--|--|--|

|     |                                                      |  |  |
|-----|------------------------------------------------------|--|--|
| CCC | GB 19510.14-2009                                     |  |  |
| CE  | EN 61347-2-13:2014<br>EN61347-1:2008+A1:2011+A2:2013 |  |  |

| EMI/EMS | /                                  |                      |
|---------|------------------------------------|----------------------|
|         | EN55015:2013+A1:2015<br>GB/T 17743 |                      |
|         | EN55015:2013+A1:2015<br>GB/T 17743 |                      |
|         | IEC/EN 61000-3-2<br>GB/T 17625.1   | Class C              |
|         | IEC/EN61000-4-5                    | B      8kV      6kV  |
|         | EN61547                            | B      10kV      6kV |

BE机型为确保雷击浪涌性能，外壳需可靠接地

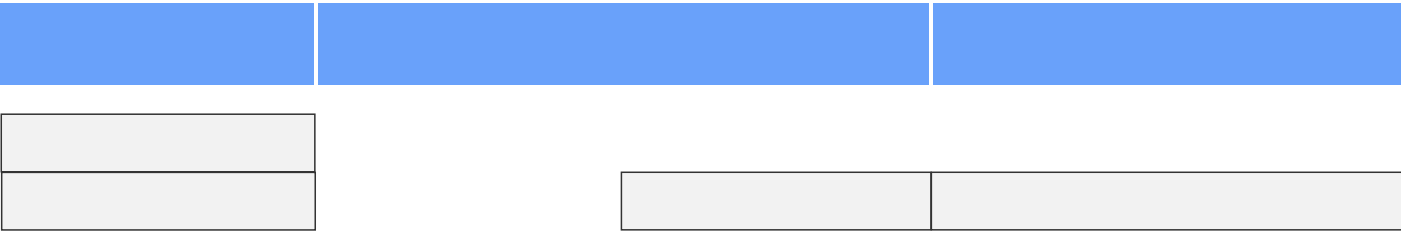


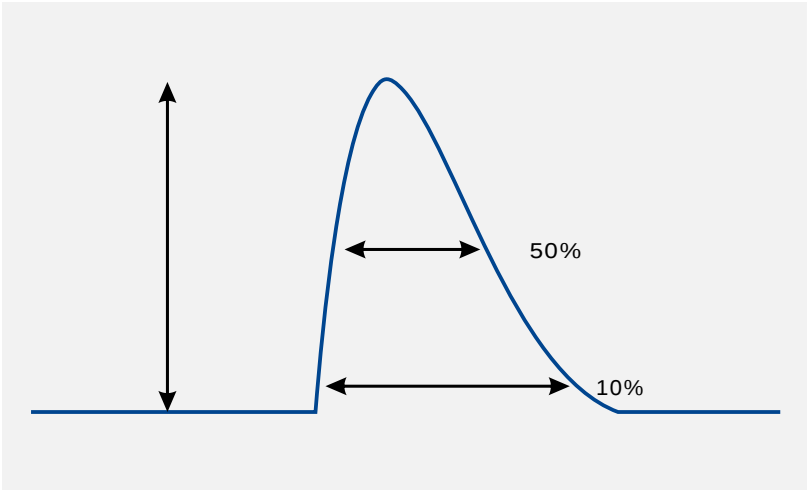

|        |      | T(@10%<br>) | T(@50%<br>) |
|--------|------|-------------|-------------|
| 120Vac | 75A  | 700uS       | 280uS       |
| 220Vac | 100A | 560uS       | 250uS       |
| 277Vac | 110A | 600uS       | 300uS       |




Vs. (Vin=277Vac)



-----


-----

Vs.

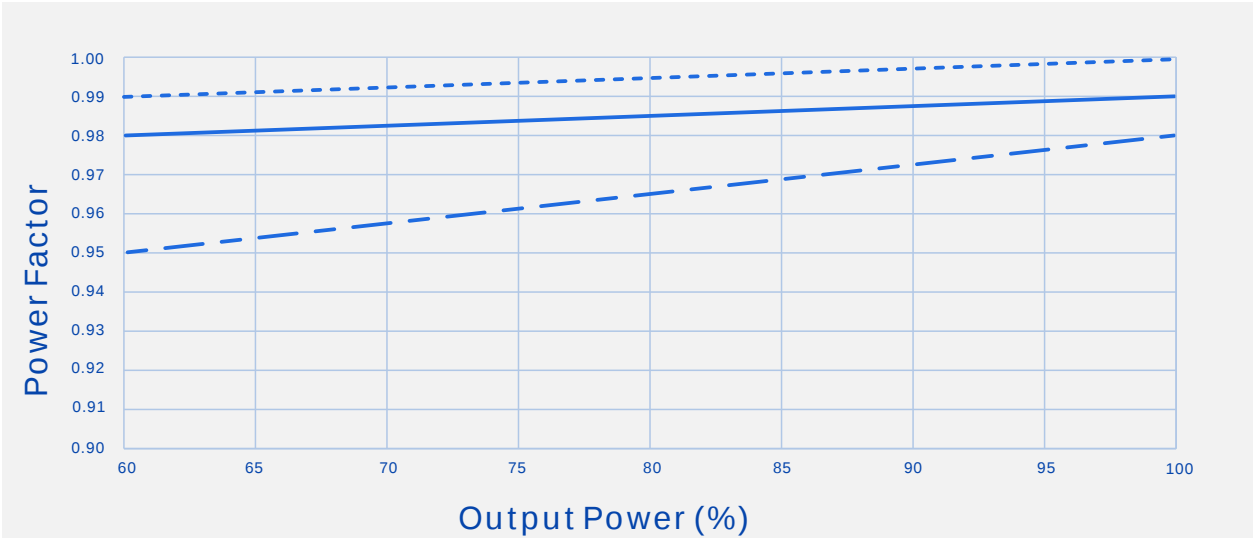

----- Vin=120Vac      ————— Vin=220Vac      - . - . Vin=277Vac


Vs.

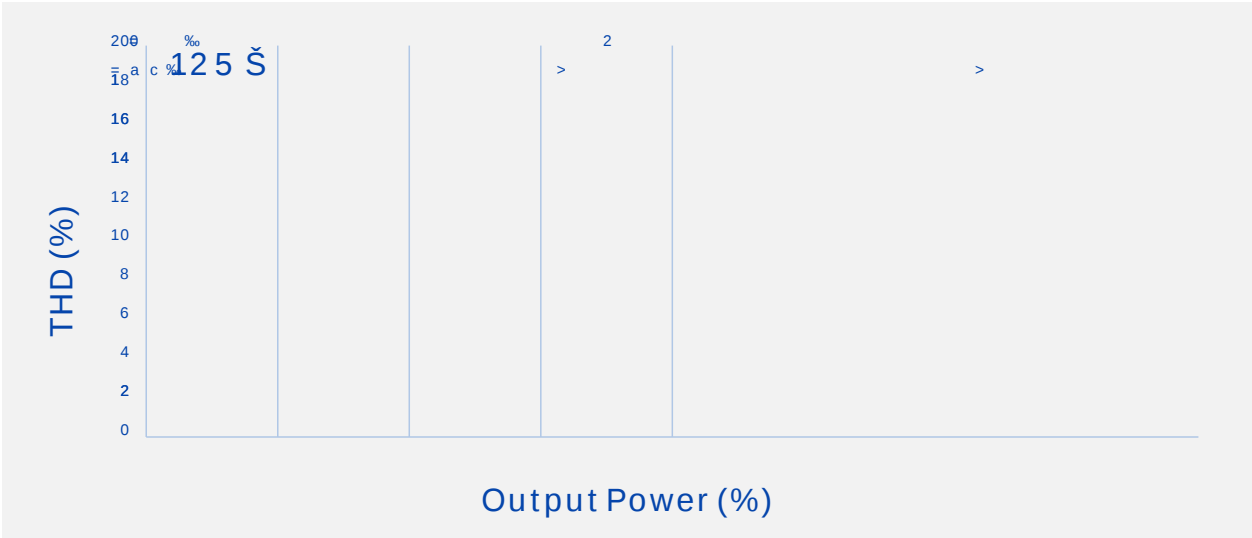

----- Vin=120Vac      ————— Vin=220Vac      - . - . Vin=277Vac



- 1
- 2
- 3
- PC

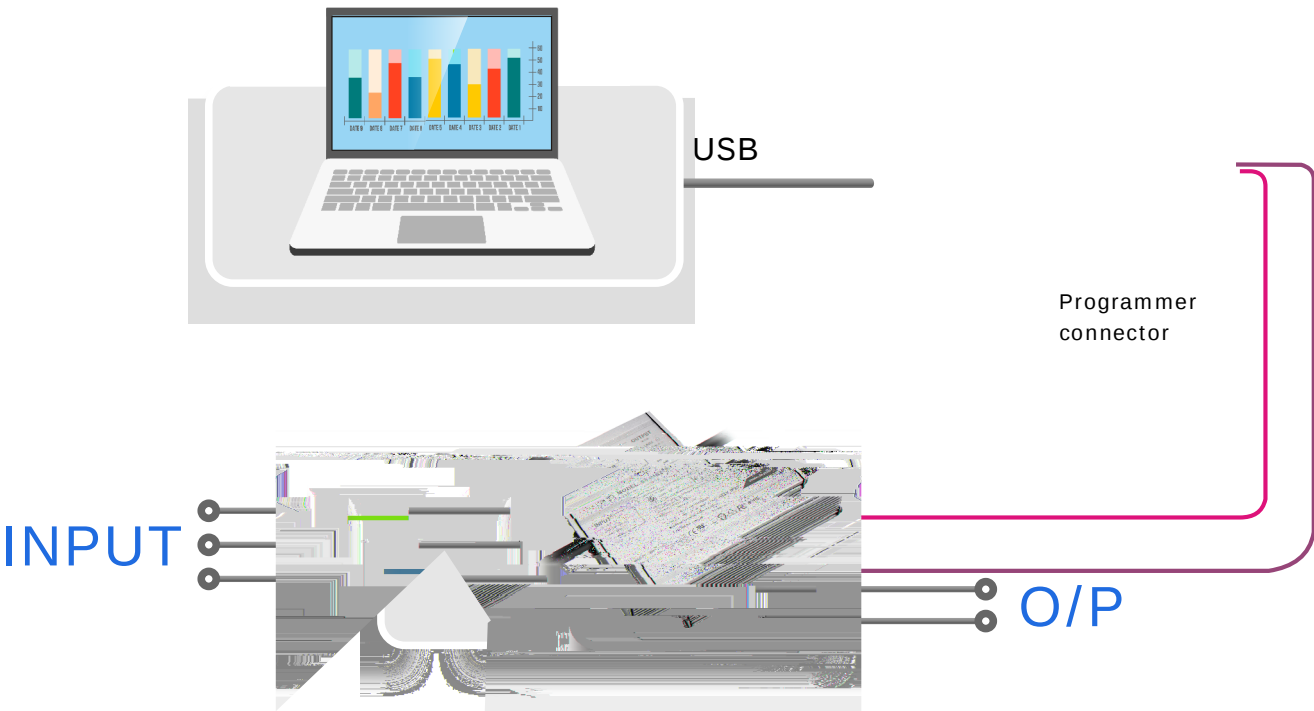

SS-250VH-A

LED


|  |         |            |  |
|--|---------|------------|--|
|  |         |            |  |
|  | (0-10V) | 10V(     ) |  |

“

10V(输出电流)” / “调光电压默认0V（吸入电<sup>压</sup>”








|   |        |    |   |        |                   |
|---|--------|----|---|--------|-------------------|
| - |        | mm | × | ×      | =495 × 385 × 162; |
| - |        | 16 |   |        |                   |
| - | 0.85kg |    |   | 14.9kg |                   |
| - |        |    |   |        |                   |

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|--|--|--|--|--|--|

|  |         |    |  |  |  |
|--|---------|----|--|--|--|
|  | GB 3873 | 83 |  |  |  |
|  | 1       |    |  |  |  |

RoHS



|     |  |            |  |
|-----|--|------------|--|
| V00 |  | 2024/06/12 |  |
| V01 |  | 2024/11/29 |  |
|     |  |            |  |
|     |  |            |  |
|     |  |            |  |