



SS-75VH-A

LED

(SS-75VH-A62*)

	30V		62V	30-35V
	35V		62V	Po=Vo*Io=75W
	1.2A		2.1A	2.1A 35V,1.2A 62V
AOC	0.35A		2.1A	
			80V	

@220Vac	86.0%	88.0%		62V/1.2A
@277Vac	86.5%	88.5%		62V/1.2A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			1.0S	120Vac,
	-5%		+5%	
		0.05%/		0 90
	90	100	110	


(SS-75VH-A108*)





SS-75VH-A

LED



	90	
	5	
	560g	
	138mm*66mm*34.75mm	x x

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

ENEC	EN 61347-1:2015/A1:2021 EN 61347-2-13:2014/A1:2017	✓	
UKCA	EN 61347-1:2015+A1:2021 EN 61347-2-13:2014+A1:2017 EN 62493:2015 BS EN 61347-1:2015+A1:2021 BS EN 61347-2-13:2014+A1:2017 BS EN 62493:2015	✓	
EAC	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013 TP TC 004/2011, TP TC 020/2011		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	/	
	EN55015:2013+A1:2015 GB/T 17743	
	EN55015:2013+A1:2015 GB/T 17743	
	IEC/EN 61000-3-2 GB/T 17625.1	Class C
	IEC/EN61000-4-5	B 8kV 6kV
	EN61547	B 10kV 6kV

BE机型为确保雷击浪涌性能，外壳需可靠接地

SS-75VH-A

LED

--	--	--	--

	ENEC		
	2U+1000Vac		
	4U+2000Vac		EC 20. ©
	≥ 10MΩ		500Vdc
	≤ 0.1Ω		25A/1min
	≤ 0.75m		277Vac


BE

--	--	--

1.

EMC
2.

LN
- EMC

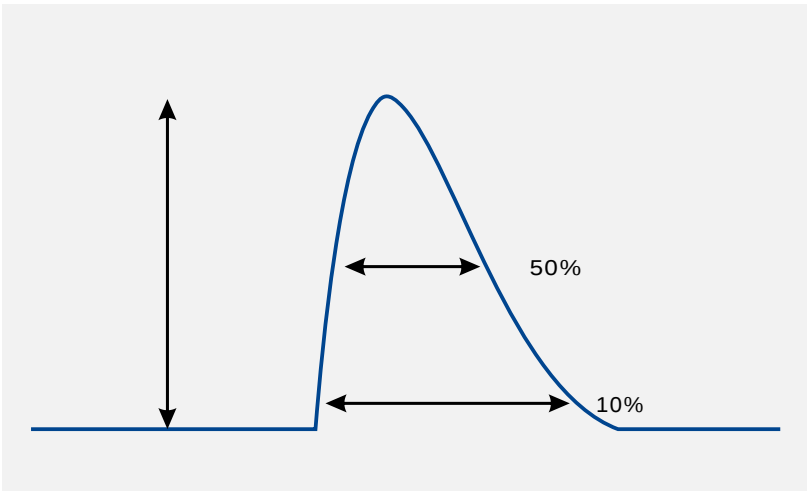


		T(@10%)	T(@50%)
120Vac	30A	490uS	200uS
220Vac	45A	520uS	220uS
277Vac	55A	580uS	320uS

(SS-75VH-A62*)

Vs. (/AOC)

(SS-75VH-A62*)

Vs. (Vin=220Vac)

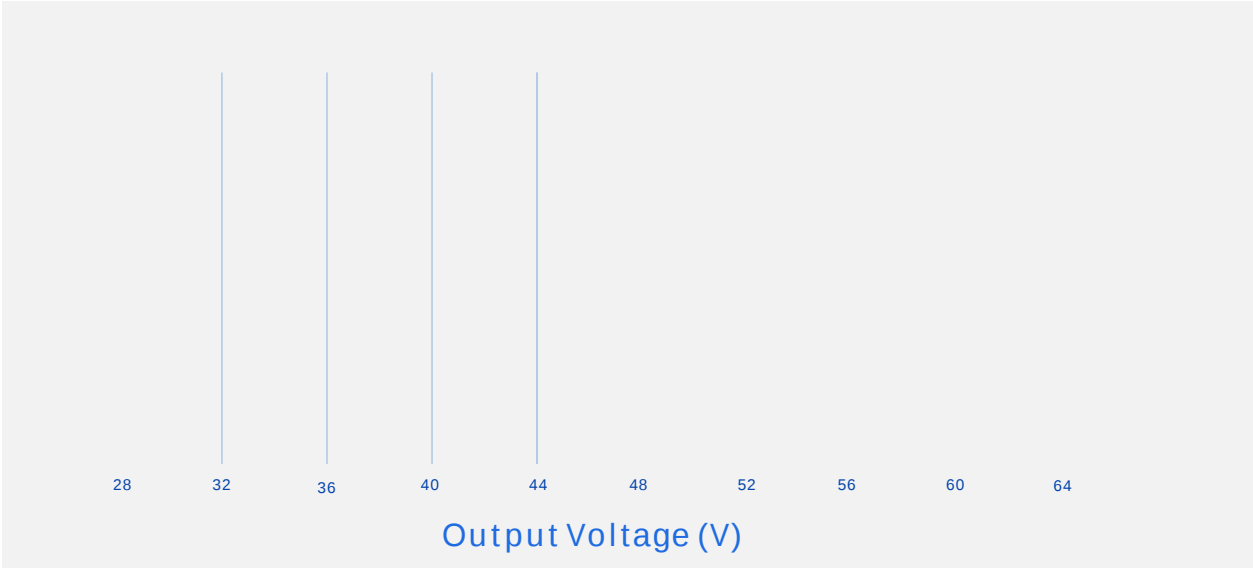


----- Io=2100mA

- . - Io=1200mA

(SS-75VH-A108*)

Vs. (Vin=120Va


Vs.

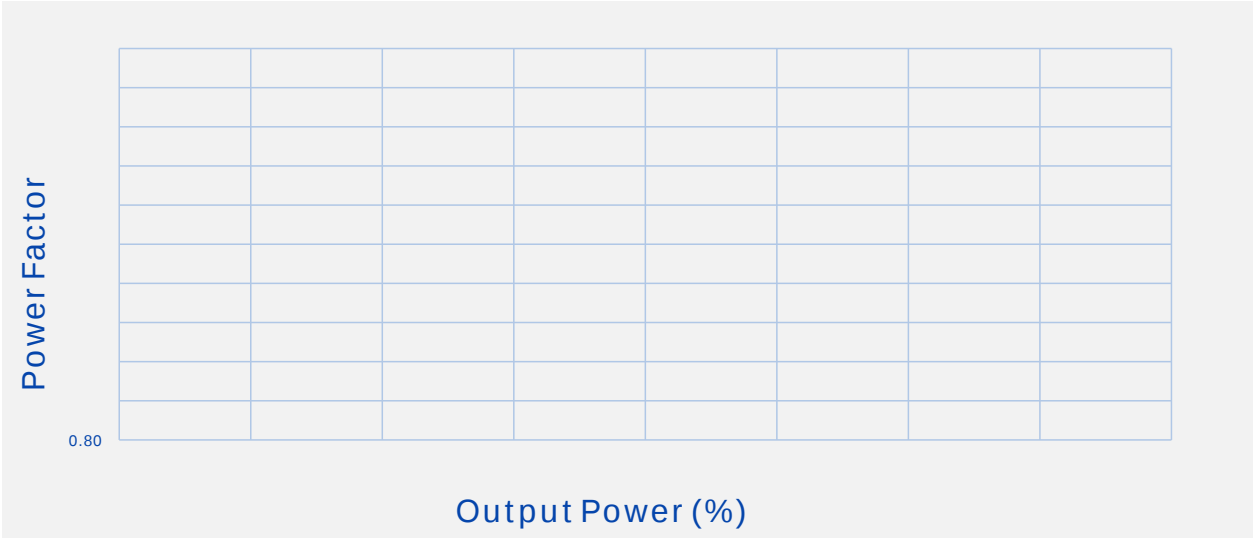


Vs.


Vs.

Vs.

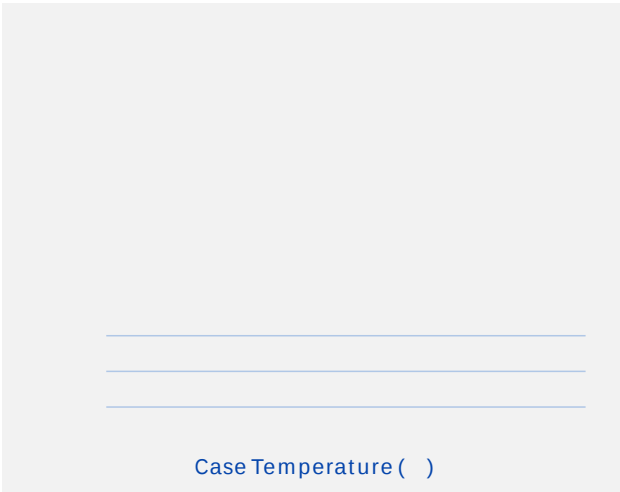


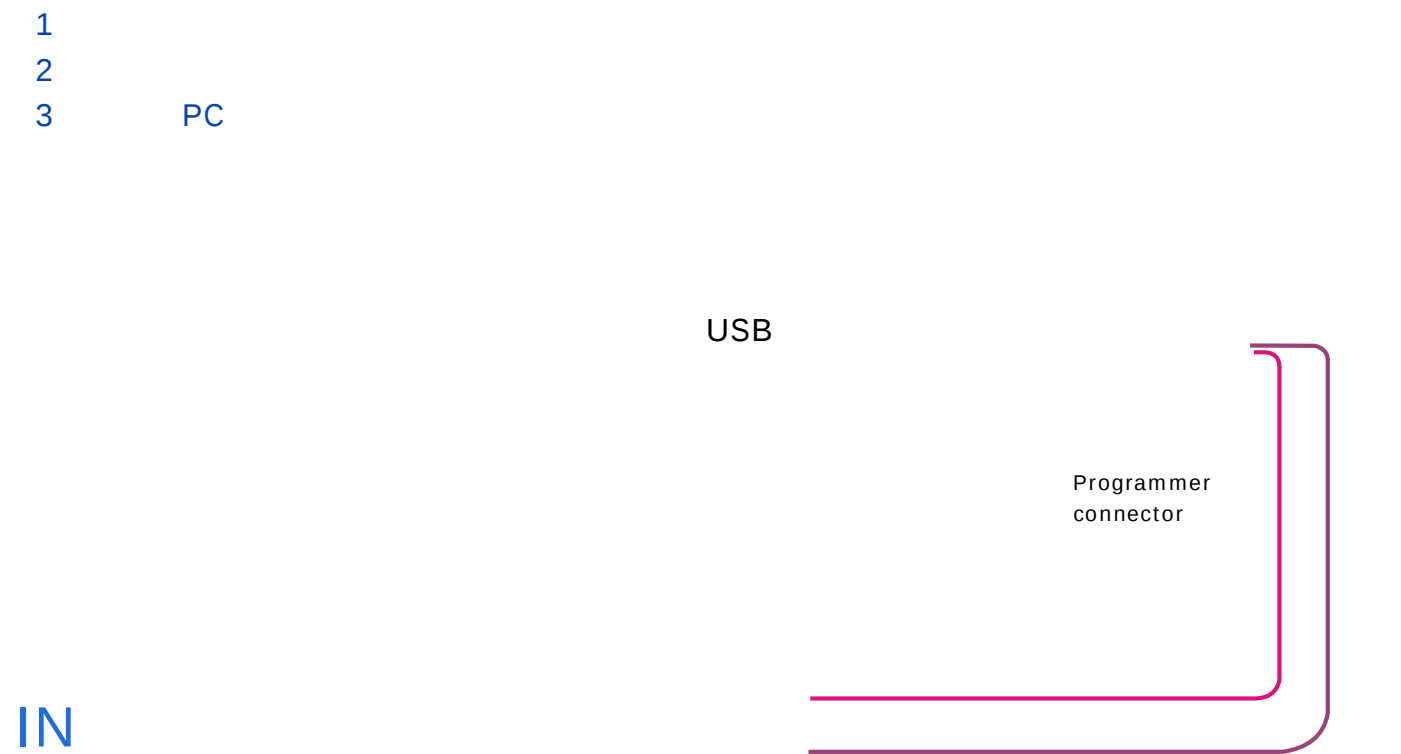

SS-75v

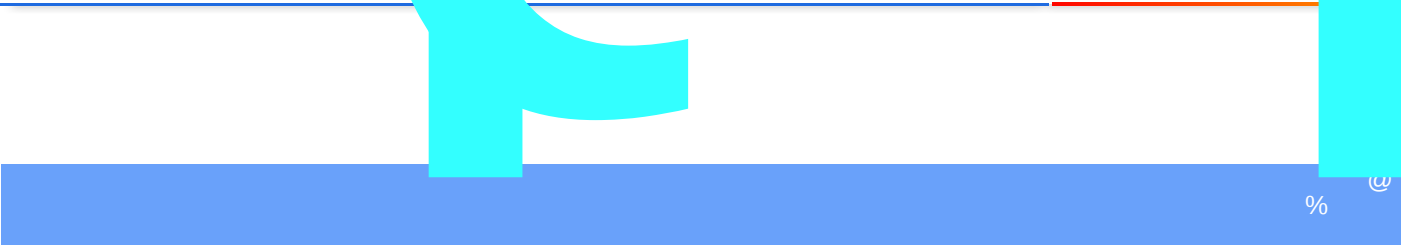

		10V()	
--	--	--------	--



1 1/2

-		mm	×	×	=495 × 385 × 162;
-		16			
-	0.56kg			10.22kg	
-					

--	--	--	--	--	--

	GB 3873	83			
1					

