


: SS-150VH-EXXX

: 150W LED

: V02

: 2026-01-07

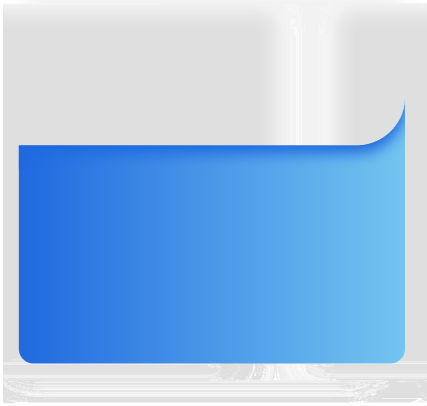

(SS-150VH-E56B)

(SS-150VH-E143B)

(SS-150VH-E215B)


--

(SS-150VH-E286B)


--


0-10V		0V		12V	DIM+ 110uA DIM+/DIM- 0-5V
		10%Iomax		100%Ioset	
		0V		10V	
10-0V		0V		10V	DIM+ 40uA DIM+/DIM- 5-0V
PWM	PWM	9.8V		10.2V	DIM+ 110uA DIM+/DIM-
	PWM	0V		0.3V	
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	DIM+ 110uA
		10%Iomax		100%Ioset	
0-10V		0.7V	0.8V	0.9V	75%
		0.8V	0.9V	1.0V	
10-0V		9.0V	9.2V	9.4V	
		8.8V	9.0V	9.2V	
	≤ 75	≥ 50,000 hours			80%
MTBF		202,000 hours			220Vac, , 25 (MIL-HDBK-217F)
		IP67			
		90			
		5			75
		710g			
		165mm*66mm*37mm			x x

			T(@50%)
			300uS



Vs. (/AOC)




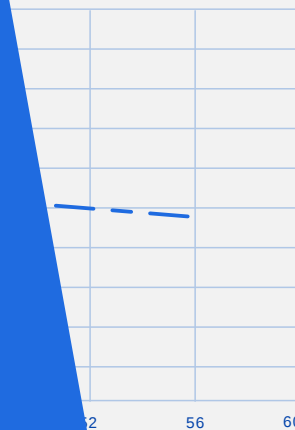


$I_o=2700\text{mA}$



$I_o=2700\text{mA}$


S-150VH-E

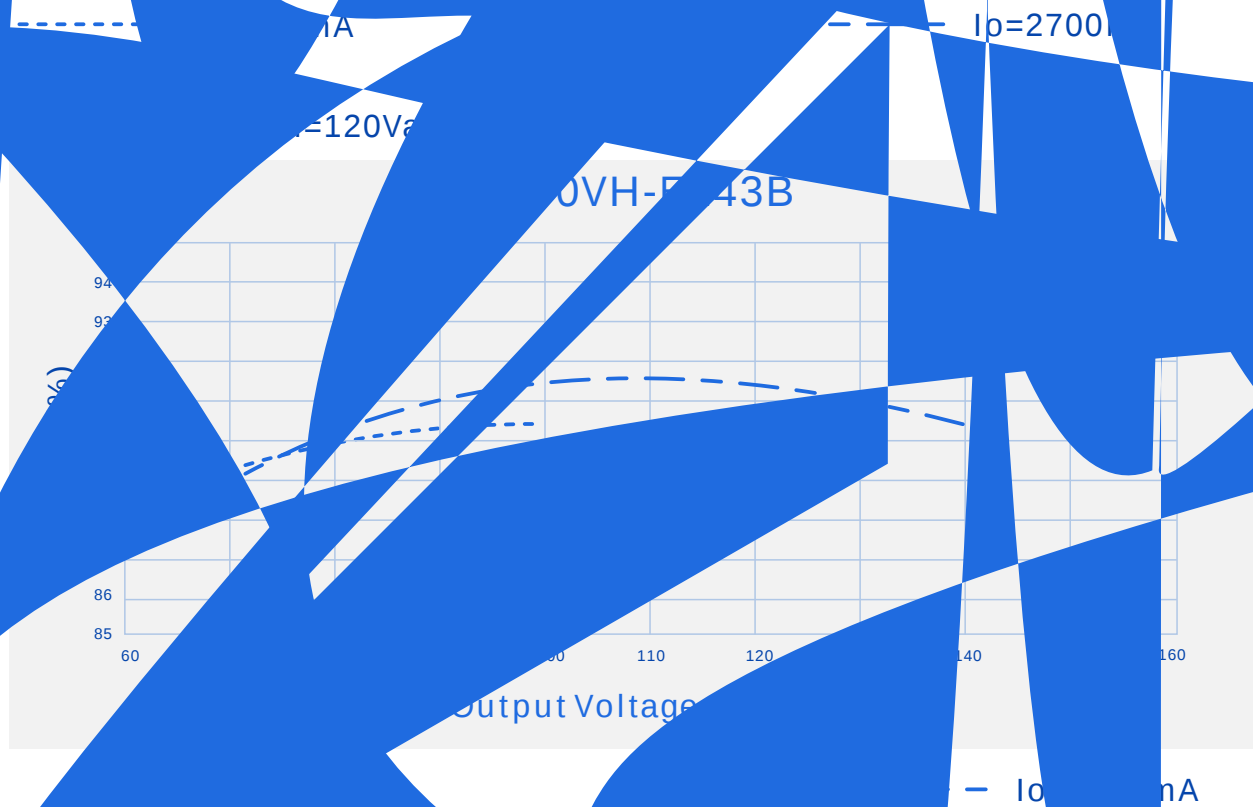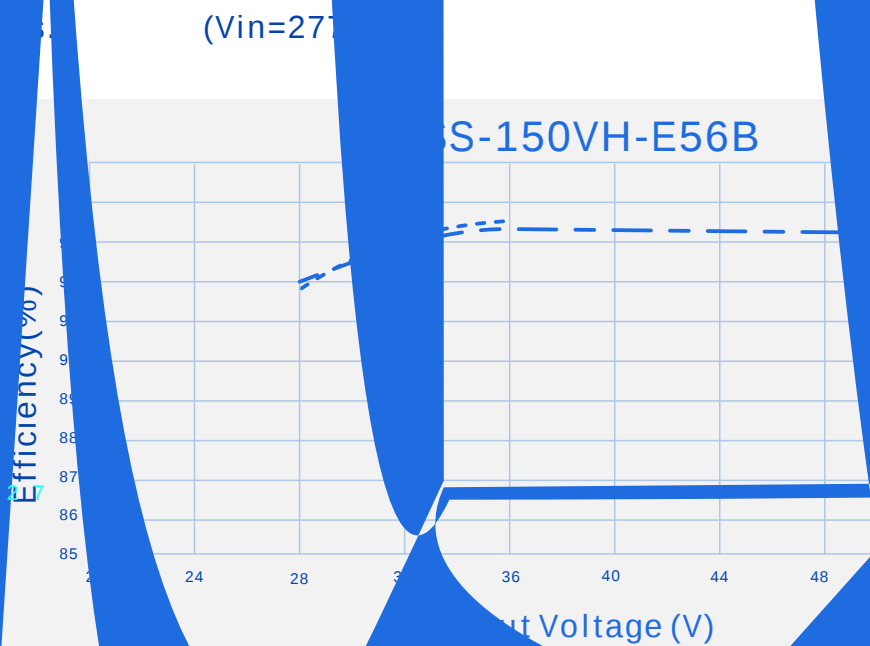


Vs.

(V

Vs. (Vin=120Vac)

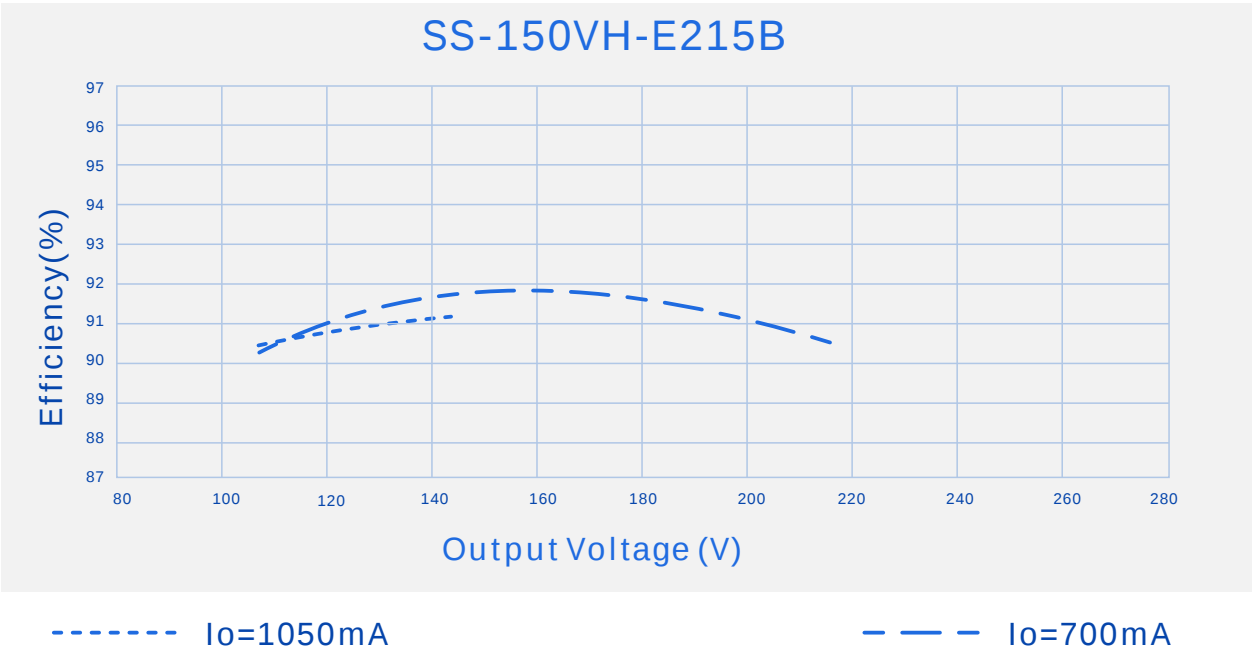

Vs. (Vin=220Vac)

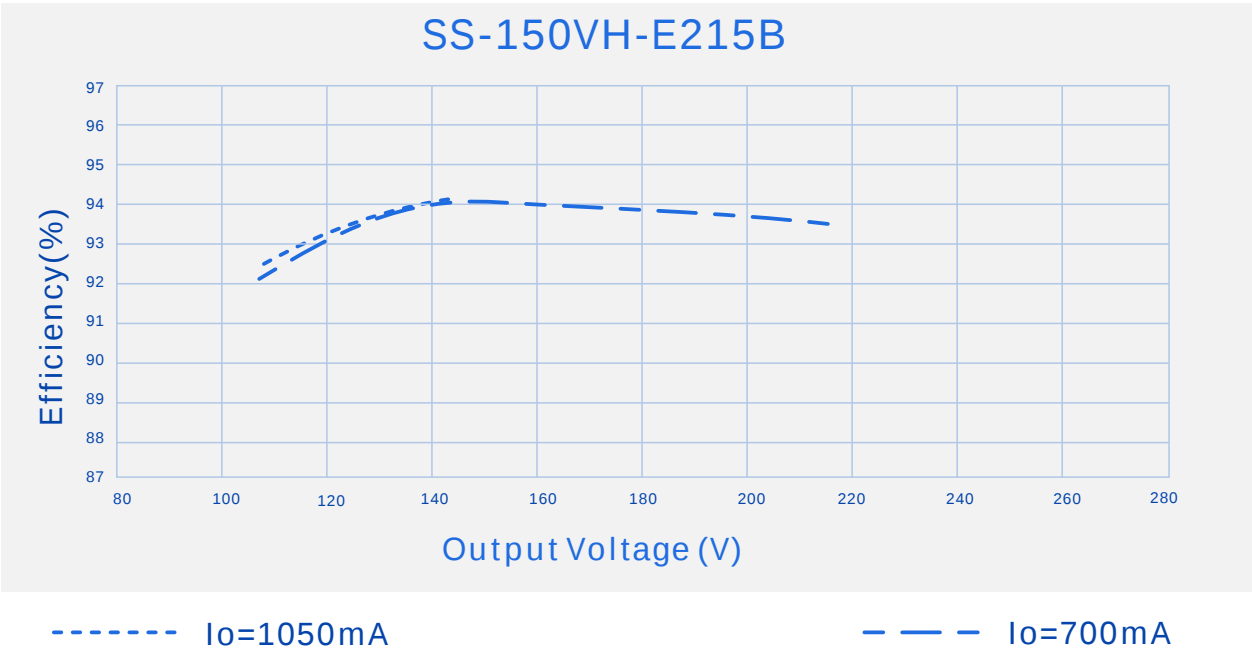


SS-150V -E ã

(SS-150VH-E56B)

Vs.

Vs.



SS-150VH-E LED


(SS-150VH-E143B)

(SS-150VH-E215B)

(SS-150VH-E286B)


Vs.

Vs.

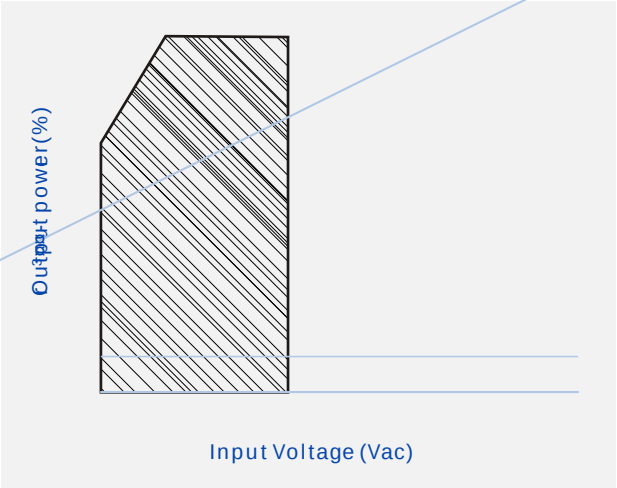

Vs.


Vs.

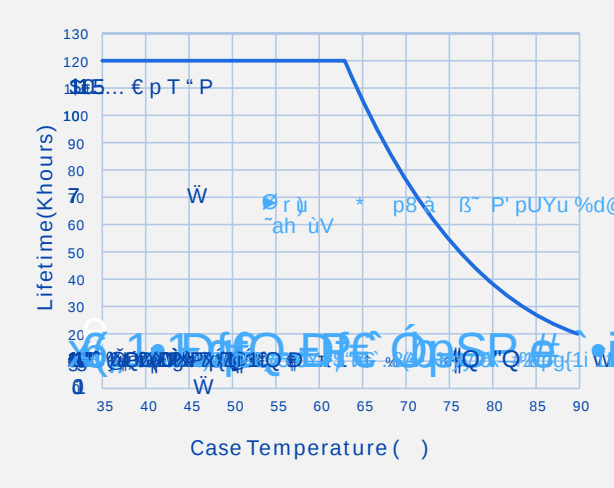

- 1
- 2
- 3 PC

			DV(	
			V(	
				(
			V(	
				(

0V（吸入电流）” 要根据最终用户使用的调光器来设置

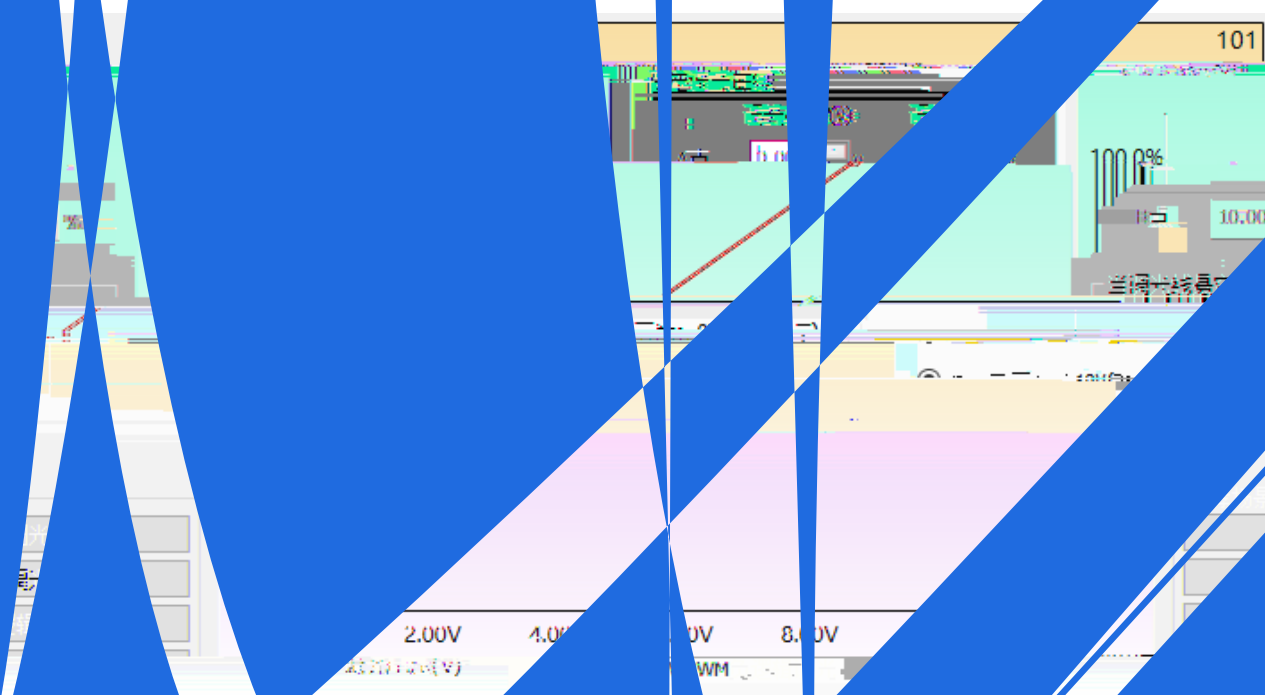

SS-150VH-E

LED

mm(In.)		
	L3	148(5.83)
	W1	66(2.6)
	H	37(1.46)
	L1	165(6.5)
	L2	156(6.14)
	W2	32(1.26)



\$6-150

00

222