


: SS-200VP-HXX
: 200W LED
: V03
: 2026-01-08



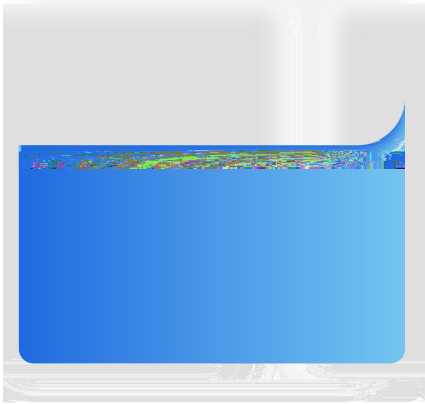

				100Vac
				220Vac/50Hz
				100-277Vac/50Hz 70-100%
				220Vac/50Hz

SS-200VP-H


LED

(SS-200VP-H56*)

	36V		56V	36-46V
	46V		56V	Po=Vo*Io=200W
	3.6A		4.35A	4.35A 46V,3.6A 56V

SS-200VP-H

LED



		10.8V	12V	13.2V	
		0mA		200mA	

MTBF	198,200 hours	220Vac, , 25 (MIL-0
	IP67	
	90	
	5	
	1000g	
	209mm*71mm*39.6mm	x x

SS-200VP-H

LED

--	--	--	--	--


Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

--	--	--	--


EMI/EMS	/	

SS-200VP-H LED

:



1. EMC M . ĩ è

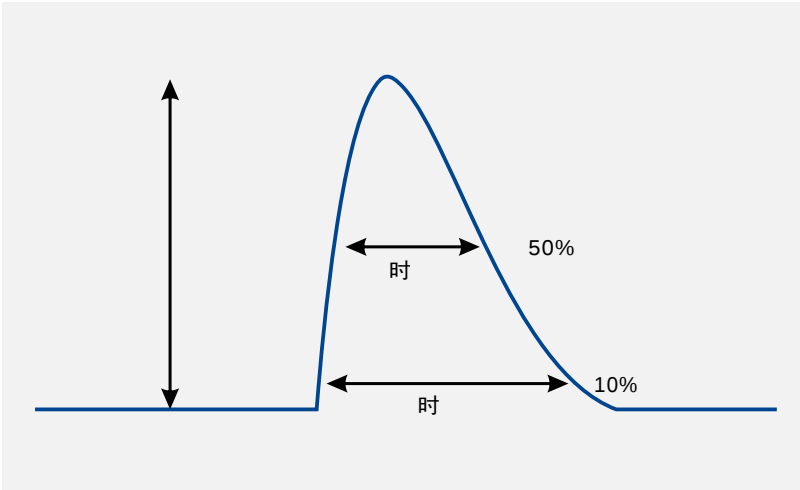

Vin		(@10%)	(@50%)
120Vac	60A	600uS	
220Vac	110A		350uS
277Vac	110A	600uS	350uS

Vs.


/AOC

SS-200VP-H56*


Vs.

(Vin=120Vac)

Vs. (Vin=220Vac)

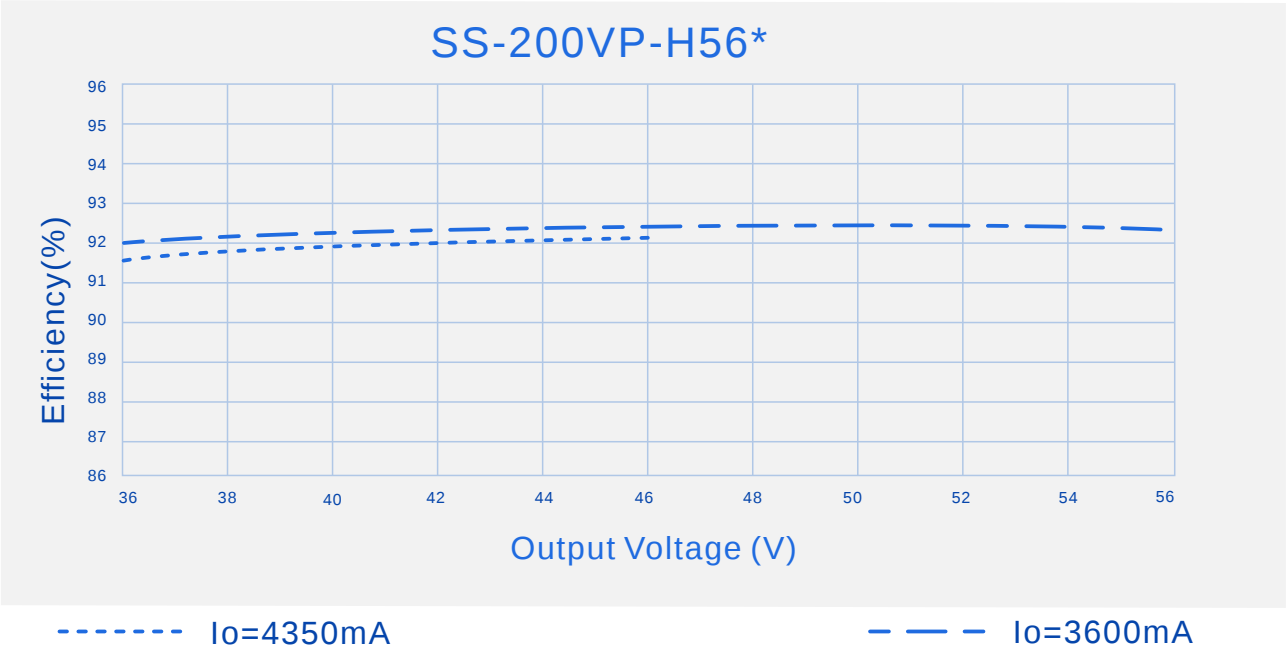


Vs. (Vin=277Vac)

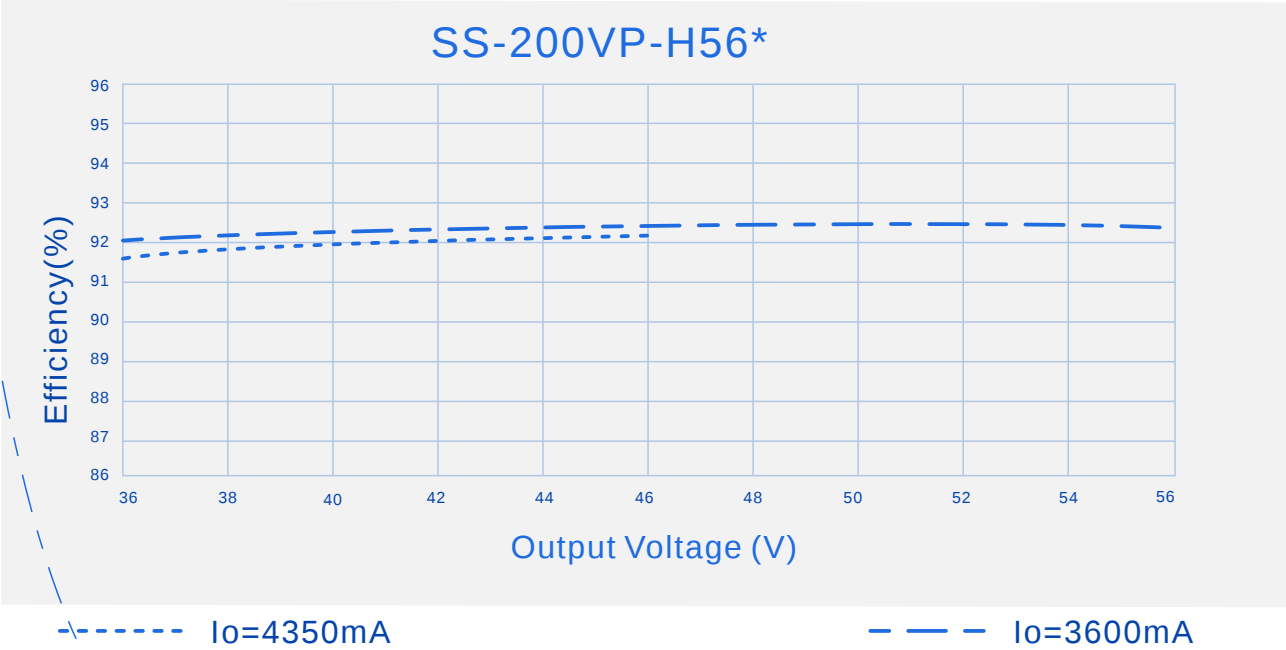


SS-200VP-H LED

Vs.

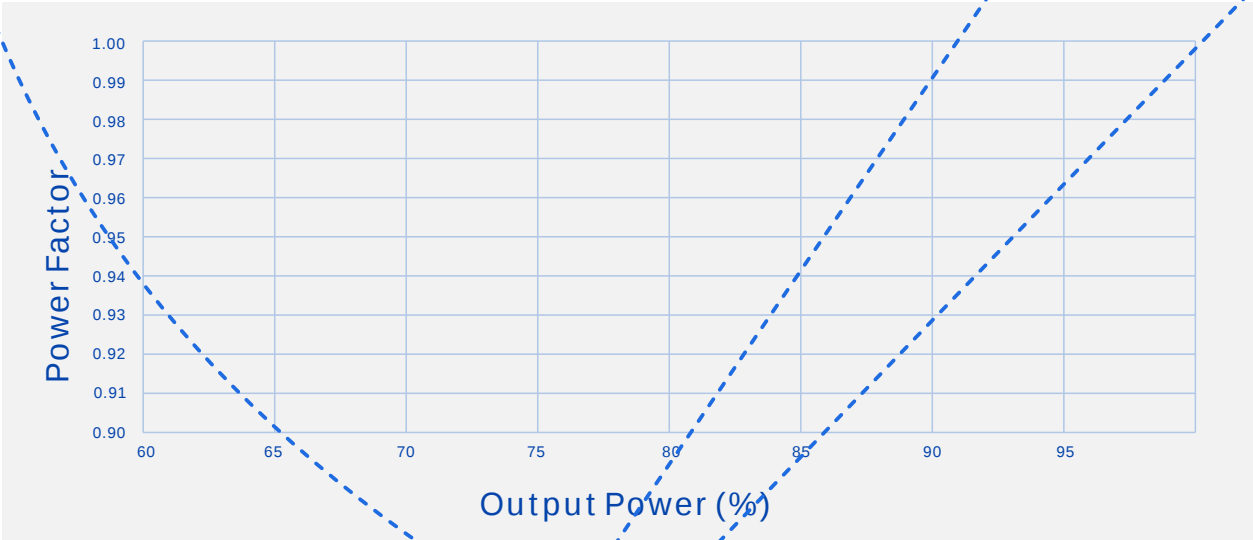

Vs.

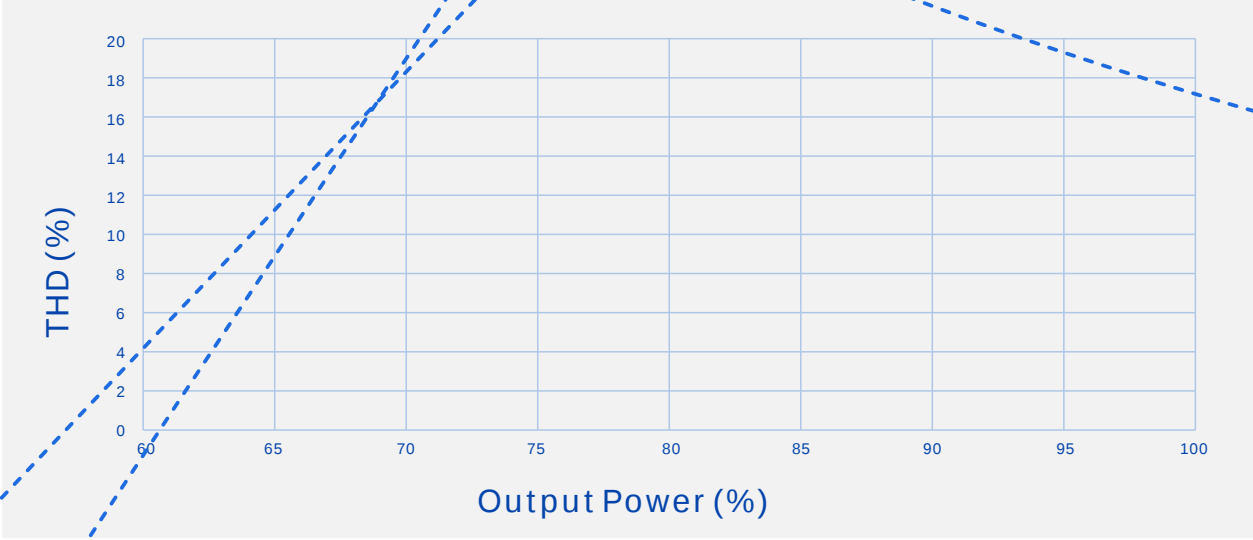

V_{in}

V_o

V_{ce}

V_{be}

V_{bc}


V_{eb}

V_{ec}

SS-200VP-H

LED

			mm(In.)
	L3		182(7.17)
	W1		71(2.8)
	H		39.6(1.56)
	L1		209(8.23)
	L2		196(7.72)
	W2		34(1.34)
Tc	X		70(2.76)
Tc	Y		46(1.81)

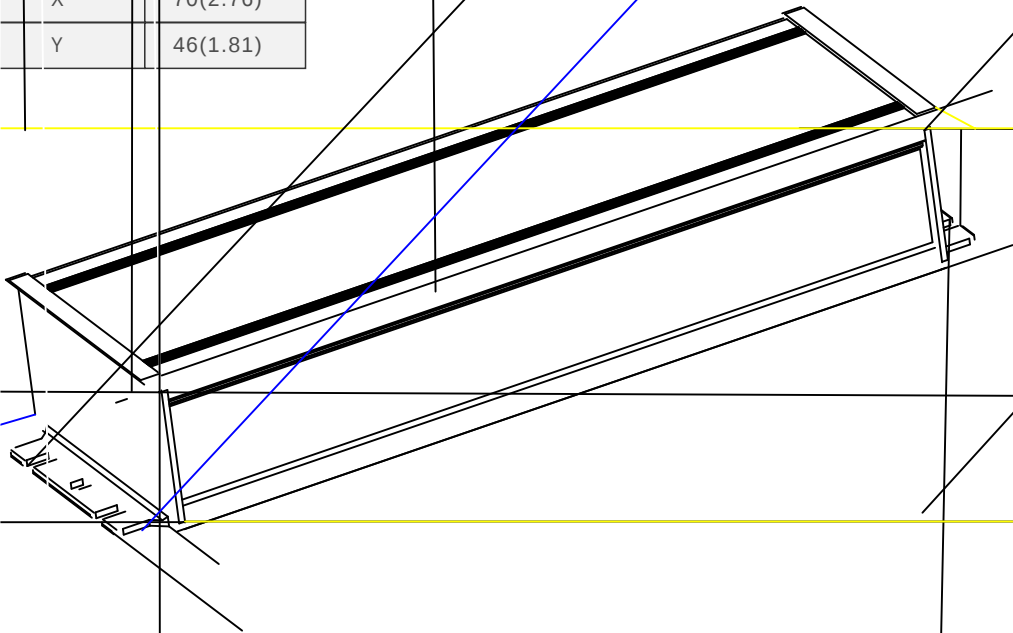



1


- mm × × =495 × 385 × 162;
- 16
- 1kg 17.5kg
-

GB 3873 83

1

RoHS

RoHS (2011/65/EU) 2015/863/EU



V00		2021/07/19	
V01		2021/09/02	
V02	DALI-2	2023/09/13	
V03		2026/01/08	